

# FLOS

■ F0095030 Black

## Aim Small

Designed by Ronan & Erwan Bouroullec, 2014




12W - 725lm - 2700K - CRI> 90

Suspended light fitting. Body in varnished aluminium sheet, shade in photo-etched optical polycarbonate. Internal reflector in photo-etched PC. Directionable body. Powered directly from mains. The LED can be dimmed with a «Triac for Led» dimmer approved by Flos. Flos does not respond in case of wrong electrical connection system installations. The cable has a useful length of 9 metres and thus the lamp can be suspended 3 metres from the ceiling. Multiple rose with capacity to connect up to 5 Aim Small also available.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

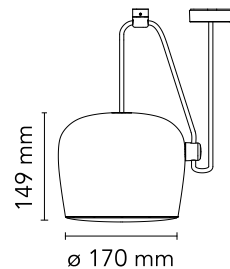

### Main specifications

EAN	8059607013526
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	12
System flux (lm)	725

### Physical

Colour	Black
Length (mm)	170
Cord length (mm)	9000
Net weight (kg)	1.35
Package height (mm)	310
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

### Download

Mounting instructions	<a href="#">↓ PDF</a>
Compatible dimmers	<a href="#">↓ PDF</a>
Spare Parts	<a href="#">↓ PDF</a>

### Photometric Files


LDT / IES	<a href="#">↓ LDT</a>
-----------	-----------------------

### Technical Drawings

2D	<a href="#">↓ ZIP</a>
3D	<a href="#">↓ ZIP</a>
Bim	<a href="#">↓ ZIP</a>




## Schematic light drawing



Luminous flux Luminaire  
725 lm

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)  
light source by a  
professional

## Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
CRI>	90

## Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Accessories & Power Supply



OPTIONAL

F0093030

Aim Multiple Canopy




OPTIONAL

RF22227

Aim Dimmer

## Spare Parts

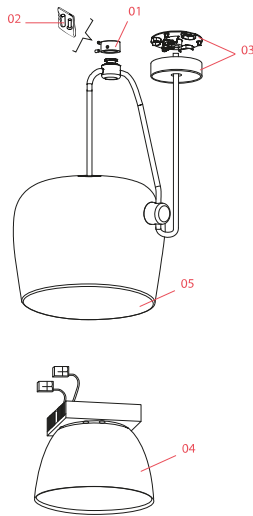

- |     |   |           |
|-----|---|-----------|
| 01. | Black ceiling attachment assembly                         | RF0090130 |
| 02. | Kit of quantity 3 m4 screws                               | RF06750   |
| 03. | Ceiling rose assembly                                     | RF1555030 |
| 04. | Aim Small Heatsink, 2700K Led Module & Reflector Assembly | RF0095600 |
| 05. | Aim small opal diffuser                                   | RF0095500 |

**DOWNLOAD**



RF0090130

Black ceiling attachment assembly



RF06750

Kit of quantity 3 m4 screws



RF1555030

Ceiling rose assembly

FLOS

RF0095600

Aim Small Heatsink, 2700K Led  
Module & Reflector Assembly



RF0095500

Aim small opal diffuser

# FLOS

F0095009 White

## Aim Small

Designed by Ronan & Erwan Bouroullec, 2014




12W - 725lm - 2700K - CRI> 90

Suspended light fitting. Body in varnished aluminium sheet, shade in photo-etched optical polycarbonate. Internal reflector in photo-etched PC. Directionable body. Powered directly from mains. The LED can be dimmed with a «Triac for Led» dimmer approved by Flos. Flos does not respond in case of wrong electrical connection system installations. The cable has a useful length of 9 metres and thus the lamp can be suspended 3 metres from the ceiling. Multiple rose with capacity to connect up to 5 Aim Small also available.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

EAN	8059607013502
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	12
System flux (lm)	725

### Physical

Colour	White
Length (mm)	170
Cord length (mm)	9000
Net weight (kg)	1.35
Package height (mm)	310
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20
IP external	20

### Download

Mounting instructions	↓ PDF
Compatible dimmers	↓ PDF
Spare Parts	↓ PDF

### Photometric Files


LDT / IES	↓ LDT
-----------	-------

### Technical Drawings

2D	↓ ZIP
3D	↓ ZIP
🔒 Bim	↓ ZIP




## Schematic light drawing



## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)  
light source by a  
professional

## Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
CRI>	90

## Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Accessories & Power Supply



OPTIONAL

F0093009

Aim Multiple Canopy





OPTIONAL

RF22227

Aim Dimmer



## Spare Parts



- |     |  |           |
|-----|--|-----------|
| 01. | Ceiling attachment assembly                                  | RF0090109 |
| 02. | Kit of quantity 3 m4 screws                                  | RF06749   |
| 03. | Ceiling rose assembly  | RF1555009 |
| 04. | Aim Small Heatsink, 2700K Led<br>Module & Reflector Assembly | RF0095600 |
| 05. | Aim small opal diffuser                                      | RF0095500 |

**DOWNLOAD**



RF0090109  
Ceiling attachment assembly



RF06749  
Kit of quantity 3 m4 screws



RF1555009  
Ceiling rose assembly

FLOS

RF0095600  
Aim Small Heatsink, 2700K Led  
Module & Reflector Assembly



RF0095500  
Aim small opal diffuser