

davide groppi

HANDBOOK 2026

INDEX

SUSPENSION / SOSPENSIONE	9	TABLE / TAVOLO	161
CARTESIO	71	ANIMA	167
CATHODE	39	BUGIA	191
LOUIS XIV	67	CALVINO	187
MAGIA	25	FM	175
MISS	61	MOON T	179
MOON	15	PoPuP	203
NEURO	75	POST PRANDIUM	195
OVO / OVONELPIATTO	79	RIBBON	199
QuiQuoQua	93	TeTaTeT	163
REFLEX S	89	TeTaTeT Flûte	183
SIMBIOSI	21	VIS À VIS	171
SOTTILE	45		
SOTTILE SISTEMA	51	WALL / PARETE	207
SOTTOSOPRA	85	CALMA	281
taO	97	D10	233
		D11	237
FLOOR / TERRA	101	D12	241
BANNER	131	DOT P	219
HASHI	115	DUET	261
MASAI	107	FOIL	257
MIA	151	FOLDER	269
MOON F	143	LINET	265
MOVIE	139	MIRA	209
OneOff	147	MIRA MAGNETIC	213
ORIGINE	111	RACE OF LIGHTS	285
PABLO	123	RAIL	291
Q	135	REFLEX	249
SAMPEI	103	SHADE	277
SET	155	SOL	245
SHOJI	119	SPOT	227
STOP	127	TOAST	253
		VICEVERSA	273

CEILING / SOFFITTO	295	OUTDOOR / ESTERNO	527
ASINTOTO	301	BELLADINOTTE	575
AURORA	297	BUBKA	533
D8	325	BUBKA BOLLARD	537
DOT PL 51	309	BUIO	549
HAKO PL	317	BUIO - SPOT	557
NULLA PL	305	CHILLOUT	599
SANMARTINO	321	GRILLO	541
TRICK TRACK	313	HAZARD	603
		IMU	587
		JULIET	579
RECESSED / INCASSO	329	LENTA	563
D1	349	NEURO OUTDOOR	591
D2	353	NUIT	571
D3	356	ORIGINE OUTDOOR	545
D4	365	Q²	595
D5	375	SAMPEI OUTDOOR	529
D6	381	SHOJI OUTDOOR	567
D7	385	SPOT OUTDOOR	583
D9	389		
DOT R	343	OBJECTS / OGGETTI	607
MIRA R	339	35MM	609
NULLA	331	ANAGRAMMA	621
		ANTE LITTERAM	617
SYSTEMS / SISTEMI	393	FILM	613
ENDLESS	439	OMBRA	625
FLASH	407		
INFINITO	395		
OHM	431	BULBS / LAMPADINE	628
TRATTO	463	DG111 LED MODULES /	
UTOPIA	423	MODULI LED DG111	628
		DRIVERS / ALIMENTATORI	629
		COMMON ACCESSORIES /	
TRACKS - PROFILES / BINARI - PROFILI	467	ACCESSORI COMUNI	634
BINARIO TRIFASE	483	COMMERCIAL TERMS /	
BUIO L	523	CONDIZIONI COMMERCIALI	637
COLIBRÌ	469		
FRAMELESS	477		
LIGHTLINE 0808	499		
LIGHTLINE 1010	504		
LIGHTLINE 1508	508		
LIGHTLINE 2612	513		
LIGHTLINE 7454	518		

INDEX

Finished product / Prodotto finito

1	A	0	0	0	0	0	0	0	0		0	0		0	0
PRODUCT FAMILY FAMIGLIA PRODOTTO					FINISH FINITURA		TARGET MARKET MERCATO DI DESTINAZIONE		-	COLOUR TEMPERATURE* TEMPERATURA COLORE*		-	CONTROL CONTROLLO		

Accessory / Accessorio

1	X	0	0	0	0	0	0	0	0		0	0		0	0
ACCESSORY FAMILY FAMIGLIA ACCESSORIO					FINISH FINITURA		TARGET MARKET MERCATO DI DESTINAZIONE		-	SEQUENTIAL NUMBER NUMERO SEQUENZIALE		-	CONTROL CONTROLLO		

Finish / Finitura

0	0	Standard
0	0	Natural Aluminium / Alluminio Naturale
0	1	Polished Chrome / Cromo Lucido
0	3	Matt White / Bianco Opaco
0	4	Matt Black / Nero Opaco
0	8	Brushed Brass / Ottone Spazzolato
1	0	Stainless Steel / Inox
1	1	Polished Stainless Steel / Inox Lucido
1	3	Black Brushed Stainless Steel / Inox Nero Spazzolato
1	4	Brushed Chrome / Cromo Spazzolato
1	5	Natural Brass / Ottone Naturale
1	8	Matt Gold / Oro Opaco
1	9	Polished Gold / Oro Lucido
2	0	Magic Blue
2	6	Total Black / Nero Totale
2	7	Gravity Black
2	8	Polished Black Chrome / Cromo Nero Lucido
2	9	Brushed Bronze / Bronzo Spazzolato
3	0	Grey Blue
3	1	Black Red
3	2	Copper Oxide
3	3	Black Green
3	4	Matt White - Black Bicolour / Bianco - Nero Opaco Bicolore
3	5	Grey Green
3	6	Brushed Black / Nero Spazzolato
3	7	Copper Brown
3	8	Blasted Inox / Inox Sabbiato
3	9	Matt White - Polished Gold / Bianco Opaco - Oro Lucido
4	0	Grey Beige
4	1	Umbra Grey
4	2	Bright Black / Nero Lucido
4	4	Natural Aluminium / Alluminio Naturale
4	9	Matt Black - Polished Gold / Nero Opaco - Oro Lucido

Colour temperature / Temperatura colore

0	0	Light source not included / Sorgente non inclusa
2	2	2200K
2	7	2700K
3	0	3000K
5	0	5000K
9	6	2700K / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

* Excluding tracks and profiles. / Esclusi binari e profili.

Control / Controllo

0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
0	8	DALI - PUSH
0	9	1-10V - TRIAC
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

The Davide Groppi handbook is a confidential document and cannot be disclosed.
In this document the drawings and technical information are to be considered indicative.
All product features and technical measurements are available on our website
davidegroppi.com

Il manuale tecnico Davide Groppi è un documento riservato e non può essere divulgato.
In questo documento i disegni e le informazioni tecniche sono da ritenersi indicative.
Tutte le caratteristiche di prodotto e le misure tecniche sono disponibili sul nostro sito
davidegroppi.com

PICTOGRAPHY / SIMBOLOGIA

 **Class II luminaire:** luminaire whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.

 **Class III luminaire:** luminaire whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the luminaire is powered by a SELV safety transformer/driver in compliance with legislation in force. The luminaire must not be connected to ground conductors.

 Degree of protection against access of foreign bodies, dust and water.

 To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along the optical axis of the luminaire to the closest lighting object.

 **Color Rendering Index:** the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra=100.

 The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the delivered lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.

 Luminaire designed to be powered by ENDLESS conductive tape.

 Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.

 Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR* <19).

Apparecchio in classe II: apparecchio in cui la protezione contro le scariche elettriche non interessa solamente l'isolamento principale, bensì comprende misure di sicurezza supplementari, come il doppio isolamento o l'isolamento rinforzato. Tali misure non comprendono mezzi di messa a terra come protezione e non dipendono dalle condizioni di installazione.

Apparecchio in classe III: apparecchio in cui la sicurezza contro la scossa elettrica si basa sull'alimentazione a bassissima tensione di sicurezza. La conformità alla normativa è garantita solo se l'apparecchio è alimentato da un trasformatore/driver di sicurezza SELV conforme alla normativa in vigore. L'apparecchio non deve essere collegato a conduttori di messa a terra.

Livello di protezione contro l'accesso di corpi estranei, polvere e acqua.

Per prevenire il rischio di incendio, mantenere come minimo la distanza indicata dalla lampadina agli oggetti illuminati. Tale distanza va misurata lungo l'asse ottico dell'apparecchio all'oggetto illuminato più vicino.

Color Rendering Index: grado di alterazione dei colori sotto una data illuminazione in confronto ad una sorgente luminosa di riferimento. L'indice ottimale di resa cromatica Ra è pari a 100.

Il flusso luminoso, misurato in lumen, indica la quantità di luce percepita dall'occhio umano emessa da una sorgente luminosa. Nelle lampade Davide Groppi con modulo integrato è indicato il reale flusso luminoso ricavato dal rilievo fotometrico. Nelle lampade in cui è inclusa una lampadina è indicato il flusso luminoso fornito dal fabbricante della lampadina stessa.

Apparecchio predisposto per essere alimentato dal tape conduttivo ENDLESS.

Apparecchio in cui è integrata la tecnologia Bluetooth Low Energy (BLE), per il controllo dell'illuminazione, Casambi.

Apparecchio dotato di Extradark comfort system. Il sistema Extradark è l'unione di un'ottica TIR in PMMA ottico a un elemento che schermo geometricamente l'angolo di visione del fascio luminoso ottenendo un'elevata uniformità di illuminamento e il pieno controllo dell'emissione. L'elemento ottico schermante, con finitura nero lucido, permette di controllare la riflessione speculare della luce e quindi di controllare in maniera perfetta l'indice di abbagliamento (UGR* <19).

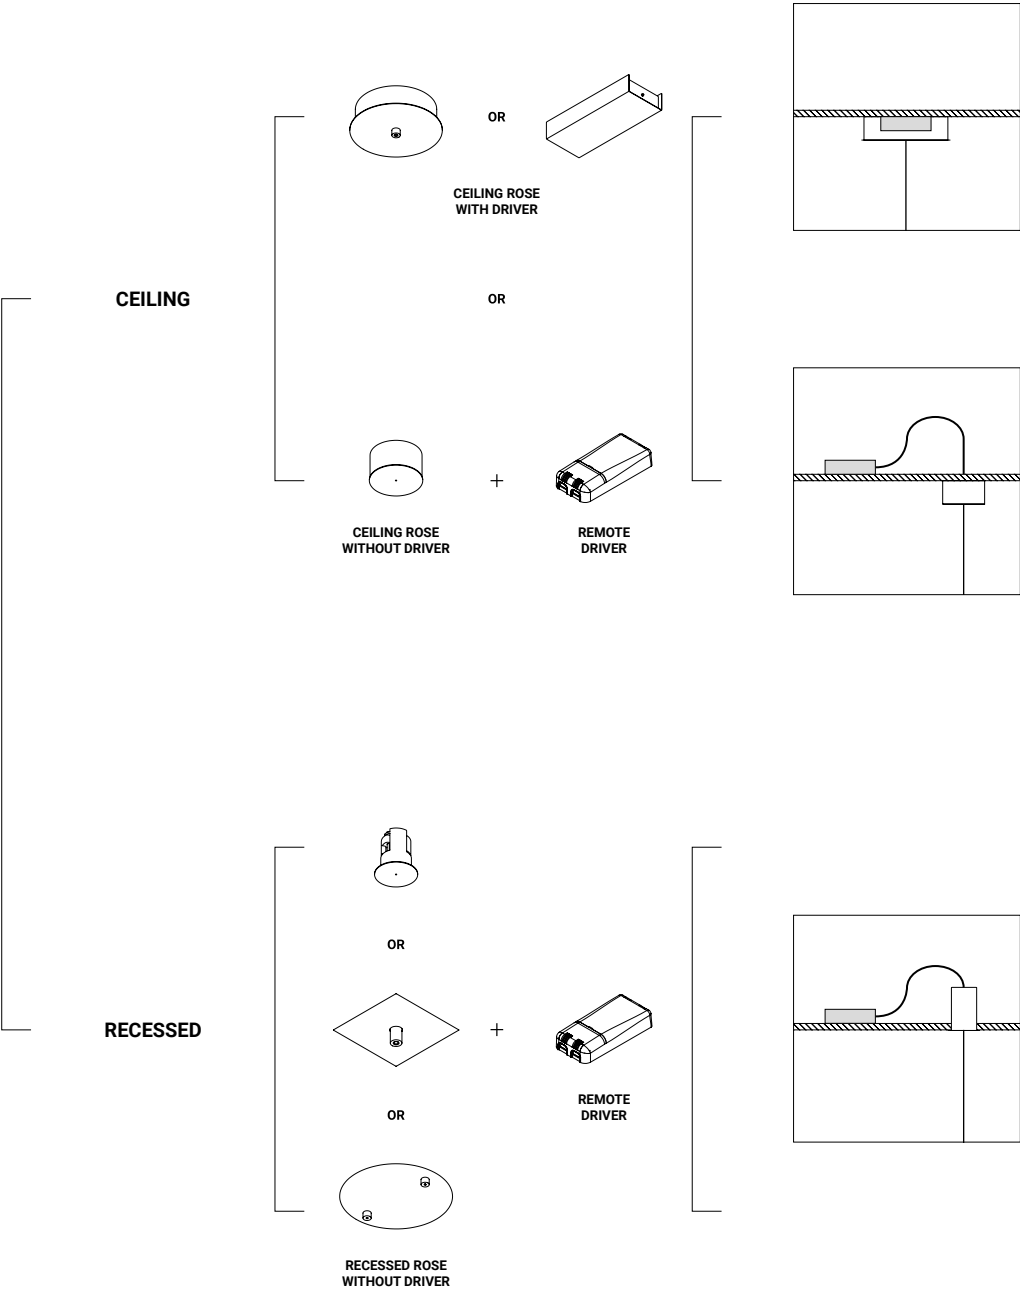
*Unified Glare Rating.

All Davide Groppi products are equipped with electronic light sources (LED).
The selection of diodes is carried out with the utmost care to guarantee the highest levels of performance and luminous uniformity.

Tutti i prodotti Davide Groppi sono equipaggiati con fonti luminose elettroniche (LED).
La selezione dei diodi è eseguita con la massima cura per garantire i più alti livelli di prestazione e di uniformità luminosa.


SUSPENSION / SOSPENSIONE

SUSPENSION LUMINAIRE
code 1AXXXXXXX.XX.20




SUSPENSION KITS / KIT DI SOSPENSIONE

CEILING SUSPENSION KITS

	Version	Use	Product reference	Finish	Code
Ceiling rose with driver*					
			See product page.		
Ceiling rose without driver					
	Ceiling rose without driver 01	For suspension cables	SOTTILE SOTTILE SISTEMA	Matt White	1X0010300.01.00
				Matt Black	1X0010400.01.00
	Ceiling rose without driver 02	For electrical cables	MAGIA	Matt White	1X0010300.02.00
				Matt Black	1X0010400.02.00
	Ceiling rose without driver 03	For suspension cables	MASAI REFLEX S	Matt White	1X0010300.03.00
				Matt Black	1X0010400.03.00
	Ceiling rose without driver 04	For electrical cables	ASINTOTO REFLEX S SOTTILE SOTTILE SISTEMA taO	Matt White	1X0010300.04.00
				Matt Black	1X0010400.04.00
	Ceiling rose without driver 05	For electrical cables	CARTESIO LOUIS XIV SOTTOSOPRA	Matt White	1X0010300.05.00
				Matt Black	1X0010400.05.00
	Ceiling rose without driver 06	For electrical cables	CATHODE MISS OVO / OVONELPIATTO	Matt White	1X0010300.06.00
				Matt Black	1X0010400.06.00

SUSPENSION KITS / KIT DI SOSPENSIONE

RECESSED SUSPENSION KITS					
	Version	Use	Product reference	Finish	Code
Recessed rose without driver					
	Recessed rose without driver 01	For suspension cables	SOTTILE SOTTILE SISTEMA	Matt White	1X0000300.01.00
				Matt Black	1X0000400.01.00
	Recessed rose without driver 02	For electrical cables	MAGIA	Matt White	1X0000300.02.00
				Matt Black	1X0000400.02.00
	Recessed rose without driver 03	For suspension cables	MASAI REFLEX S	Matt White	1X0000300.03.00
				Matt Black	1X0000400.03.00
	Recessed rose without driver 04	For electrical cables	ASINTOTO REFLEX S SOTTILE SOTTILE SISTEMA taO	Matt White	1X0000300.04.00
				Matt Black	1X0000400.04.00
	Recessed rose without driver 05	For electrical cables	CARTESIO LOUIS XIV SOTTOSOPRA	Matt White	1X0000300.05.00
				Matt Black	1X0000400.05.00
	Recessed rose without driver 06	For electrical cables	CATHODE MISS OVO / OVONELPIATTO	Matt White	1X0000300.06.00
				Matt Black	1X0000400.06.00
	Recessed rose without driver*		CATHODE MISS OVO / OVONELPIATTO	Matt White	1X0230300.04.00
				Matt Black	1X0230400.04.00
	Recessed rose without driver*		SIMBIOSI	Matt White	1X0220300.03.00
				Matt Black	1X0220400.03.00

* Custom finish available on request. / Finitura personalizzata su richiesta.




Davide Groppi / 2005

MOON


Suspension luminaire with diffuse light for indoor use.	MOON was created from the dream of bringing the moon inside your own home. The unryu kozo paper surface makes every lamp unique.	The rose is in matt white painted steel. The diffuser is in polypropylene and is hand-coated with unryu kozo paper. MOON 60 DE is dual emission.	It requires an E27 LED bulb, which is not included but is available as an accessory.
Apparecchio di illuminazione a sospensione, a luce diffusa, per interni.	MOON nasce da un sogno, quello di portare la luna dentro casa. La superficie di carta unryu kozo, fatta a mano, rende unico ogni pezzo.	Il rosone è in acciaio verniciato bianco opaco. Il diffusore è in polipropilene rivestito a mano con carta unryu kozo. MOON 60 DE è a doppia emissione.	La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio.

Finish	.00	Standard
--------	-----	----------




MOON 60
Max 15W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
C E IP20

Standard - ON/OFF	1A2820000.00.00
-------------------	-----------------




MOON 60 DE
Dual emission
Max 15W - E27 + Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included
C E IP20

Standard - ON/OFF	1A2830000.00.00
-------------------	-----------------




MOON 80
Max 15W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
C E IP20

Standard - ON/OFF	1A2840000.00.00
-------------------	-----------------



MOON 120
Max 2x25W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
C E IP20

Standard - ON/OFF	1A2850000.00.00
-------------------	-----------------



MOON 200
Max 4x25W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
Moisture barrier bag included
Wooden crate included
Transport excluded
C E IP20

Standard - ON/OFF	1A2860000.00.00
-------------------	-----------------

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - E27 - A60			Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 60 / MOON 60 DE / 1Y0330790 MOON 80 / MOON 200	



LED - GU10 - PAR16			Not included
	220-240V - 5,5W - 25° 2700K - 355lm - CRI >97 Energy Efficiency G - Dimmable	MOON 60 DE 1Y0330770	



LED - E27 - A150			Not included
	220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120 1Y2160020	

Optional accessories / Accessori opzionali


Suspension kits / Kit di sospensione




Sloped rose suspension kit / Kit di sospensione per rosone inclinato			Not included
Nickel plated - 1 Piece	MOON 60 / MOON 60 DE / 1A0520000.00.00	MOON 80	



Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato			Not included
Nickel plated - 1 Piece	MOON 120	1A0510000.00.00	



Decentralization kit / Kit decentratore			Not included
		1A0360000.00.00	



Kit ceiling rose and decentralizer / Kit rosone e decentratore			Not included
Matt White	Transparent cable 3 m included	1A0770300.00.00	
Matt Black	Transparent cable 3 m included	1A0770400.00.00	


Other accessories / Altri accessori

Moisture barrier bag / Sacco barriera			Not included
Packaging for air and sea shipping	MOON 60 / MOON 60 DE	4A2820010	

Moisture barrier bag / Sacco barriera			Not included
Packaging for air and sea shipping	MOON 80	4A2840010	

Moisture barrier bag / Sacco barriera			Not included
Packaging for air and sea shipping	MOON 120	49860020	

Wooden crate / Cassa in legno			Not included
Packaging for air and sea shipping	MOON 120	49860010	

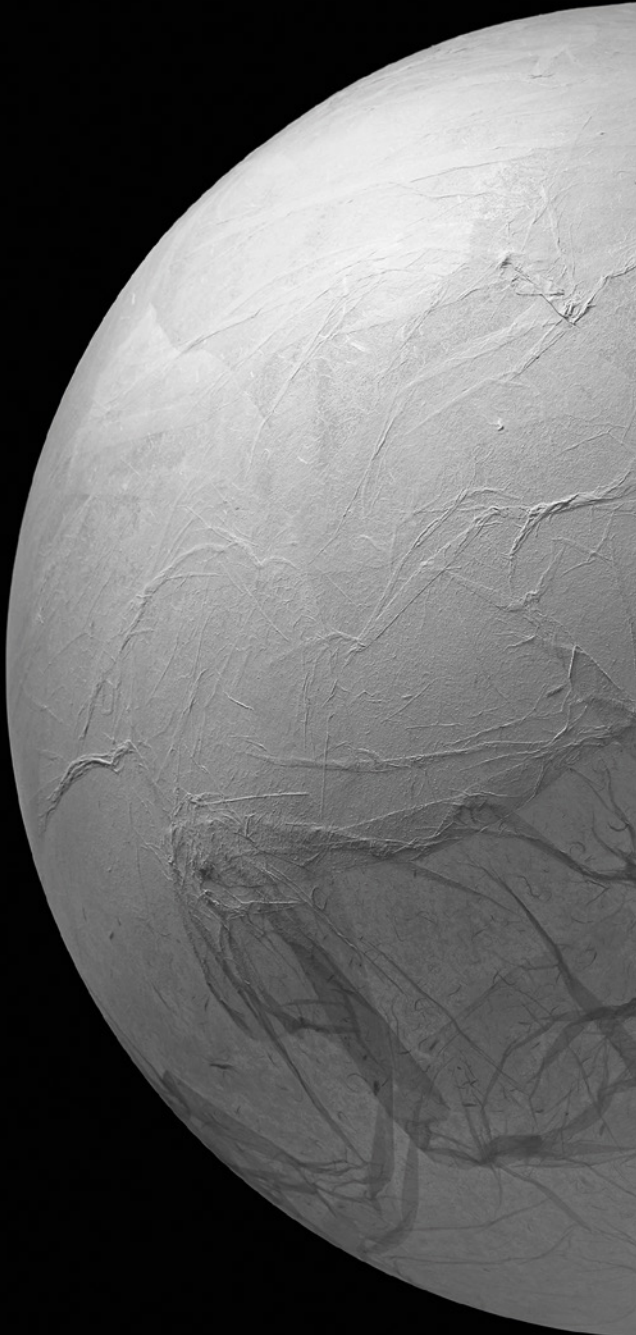



Suspension luminaire with direct light for indoor use.

A de-structured chandelier that can be re-assembled as you like. A conjuring trick that allows you to connect the light diodes in series. The very thin wire that connects the light sources and brings them alive, one in relation to the other, is the main feature of this project.

The roses available are in textured matt black or matt white painted steel. The spotlights are in aluminium in a range of painted or galvanised finishes.

The light sources are LED, with an integrated module. The electric cables come in a range of colours, depending on the finish. A range of roses and power supplies are available.

Apparecchio di illuminazione a sospensione, a luce diretta, per interni.


Un lampadario destrutturato e componibile a piacere. Un piccolo gioco di prestigio sfruttando la possibilità di collegare in serie i diodi luminosi. Il filo, sottilissimo, che unisce i corpi e li fa vivere l'uno in funzione dell'altro, è la caratteristica principale di questo progetto.

I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. I proiettori sono in alluminio in varie finiture verniciate o galvanizzate.

Le sorgenti luminose sono a LED e a modulo integrato. I cavi elettrici sono di colori vari in fuzione della finitura. Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.03	Matt White	(White cables with Red hook-up wires)	.19	Polished Gold	(Black cables with Black hook-up wires)
	.26	Total Black	(Black cables with Grey hook-up wires)			

 Custom finish available on request. Finitura personalizzata su richiesta.



SIMBIOSI

12W

Max 500mA DC

2700K - 931lm / 3000K - 960lm

CRI >90


Driver not included

CE IP20


Matt White - 2700K	1A2870300.27.20
Matt White - 3000K	1A2870300.30.20
Polished Gold - 2700K	1A2871900.27.20
Polished Gold - 3000K	1A2871900.30.20
Total Black - 2700K	1A2872600.27.20
Total Black - 3000K	1A2872600.30.20

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione




Ceiling rose with driver / Rosone con alimentatore			Not included
Matt White	Input 110-240V - 50/60Hz Output 500mA DC - Max 12W IP20 - DALI - PUSH - 1-10V	1X0220300.01.07	
Matt Black	Input 110-240V - 50/60Hz Output 500mA DC - Max 12W IP20 - DALI - PUSH - 1-10V	1X0220400.01.07	
Matt White	Input 220-240V - 50/60Hz Output 500mA DC - Max 12W IP20 - TRIAC/IGBT	1X0220300.02.02	
Matt Black	Input 220-240V - 50/60Hz Output 500mA DC - Max 12W IP20 - TRIAC/IGBT	1X0220400.02.02	




Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	1X0220300.03.00	
Matt Black	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	1X0220400.03.00	

Drivers / Alimentatori




Driver / Alimentatore			Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500	



Driver / Alimentatore			Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500	

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione




Sloped ceiling suspension hook / Gancio di sospensione per soffitto inclinato		Not included
Chrome plated - 1 Piece		1A0530000.00.00




Suspension luminaire with direct and indirect light, for indoor use.	Light and transparency are the true stars of this project. We have always liked to think heretically, evoking mystery, magic and seduction. With indirect light, the SIDE module exploits the effect of the convex lens to conceal the light beam. With direct light, the DOWN module is the ideal solution for bringing light to tables and sideboards. The modules can be used in combination.	The roses available are in textured matt black or matt white painted steel. The body is in transparent methacrylate for the SIDE version and in transparent glass for the DOWN version. The power heads are in polished black chrome or polished gold galvanised aluminium. The SIDE version is adjustable along the longitudinal axis, while the DOWN version is fixed. The height of the luminaire can be adjusted.	The light sources are LED with integrated module. The unipolar cables are in galvanised steel and silver-copper. A range of roses and power supplies are available.
Apparecchio di illuminazione a sospensione, a luce diretta e indiretta, per interni.	La luce e la trasparenza sono le vere protagoniste di questo progetto. Da sempre ci piace pensare in modo eretico, evocando mistero, magia e seduzione. Il modulo SIDE, a luce indiretta, sfrutta l'effetto della lente convessa per celare la parte di emissione della luce. Il modulo DOWN, a luce diretta, è la soluzione ideale per portare la luce su tavoli e sideboard. È possibile l'utilizzo combinato dei moduli.	I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. Il corpo è in metacrilato trasparente per la versione SIDE e in vetro trasparente per la versione DOWN. Le teste di alimentazione sono in alluminio galvanizzato oro lucido o cromo nero lucido. La versione SIDE è orientabile lungo l'asse longitudinale mentre la versione DOWN è fissa. È possibile regolare l'altezza di posizionamento del corpo illuminante.	Le sorgenti luminose sono a LED e a modulo integrato. I cavi elettrici unipolari sono in acciaio zincato e rame argentato. Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.19 Polished Gold	.28 Polished Black Chrome
--------	-------------------	---------------------------


MAGIA DOWN



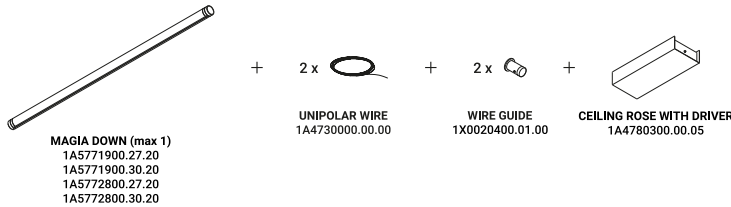
MAGIA DOWN
Single installation with
ceiling rose with driver



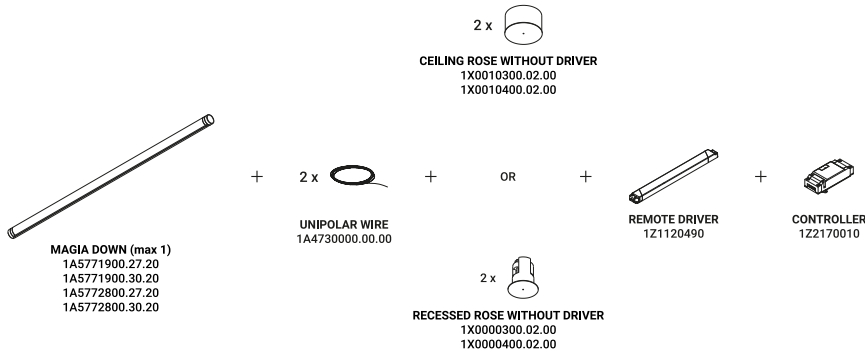
MAGIA DOWN
Single installation with
ceiling or recessed rose
without driver




MAGIA SIDE



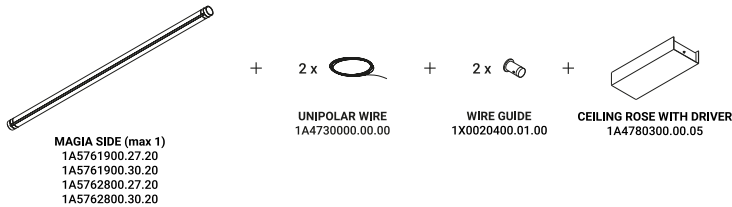
MAGIA SIDE
Single installation with
ceiling rose with driver



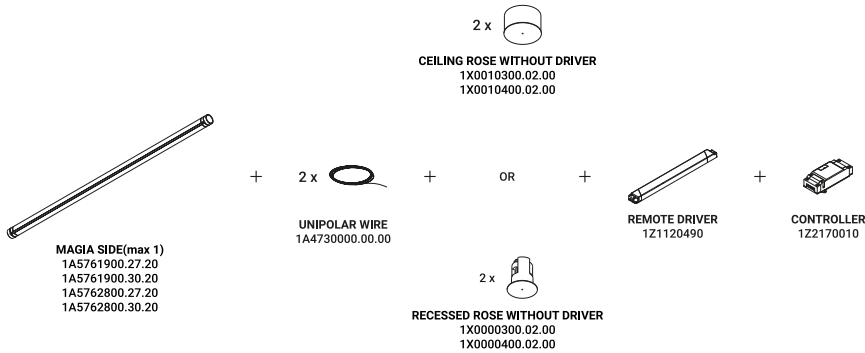
MAGIA SIDE
Single installation with
ceiling or recessed rose
without driver



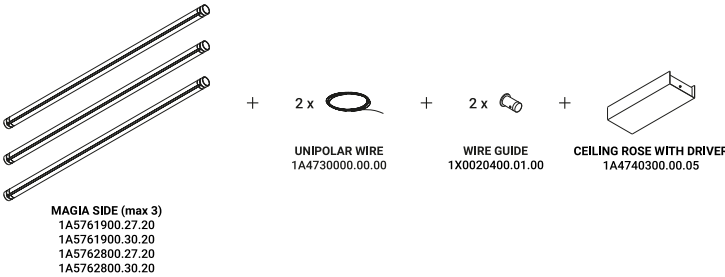
MAGIA SIDE
Multiple installation with
ceiling rose with driver



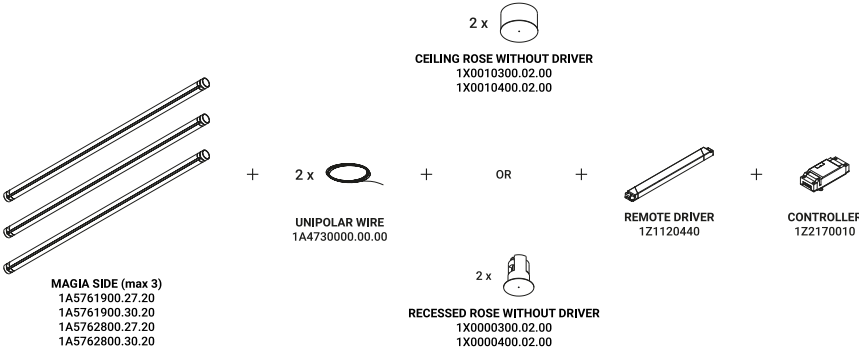
MAGIA SIDE
Multiple installation with
ceiling or recessed rose
without driver




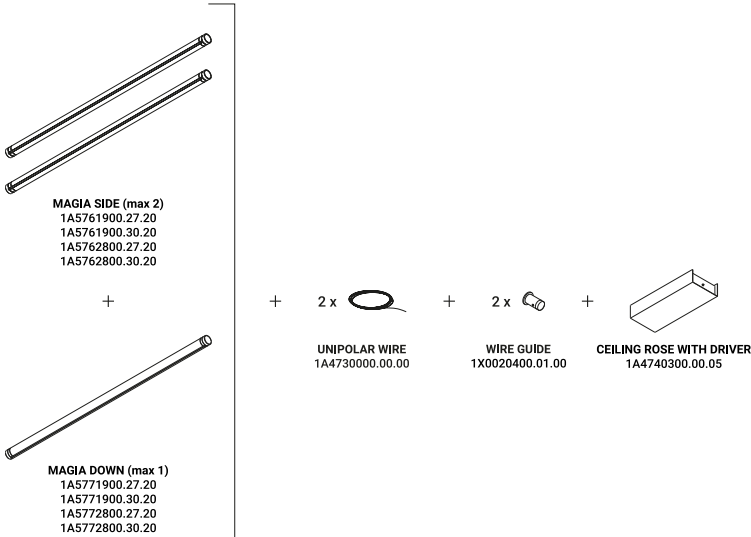MAGIA SIDE +
MAGIA DOWN
Multiple installation with
ceiling rose with driver



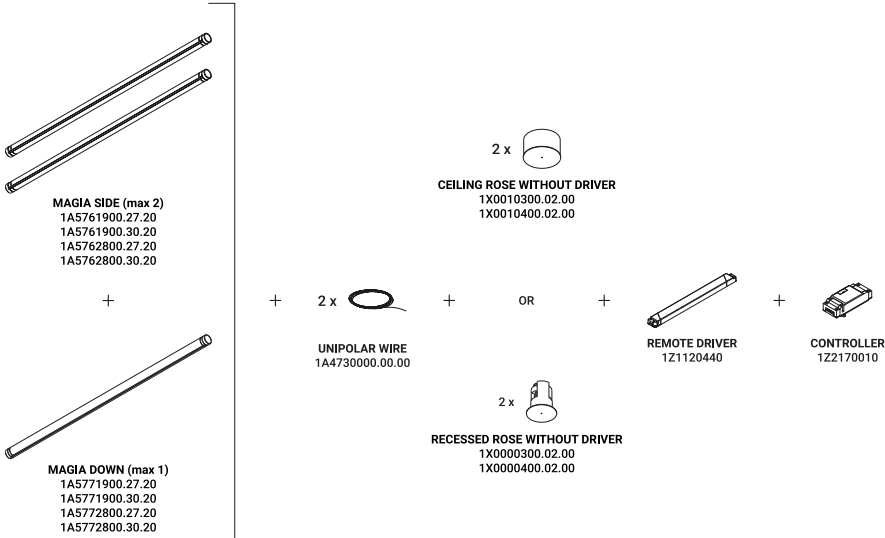MAGIA SIDE +
MAGIA DOWN
Multiple installation with
ceiling or recessed rose
without driver





MAGIA SIDE

21W

24V DC


2700K - 1290lm / 3000K - 1358lm

CRI >90

Driver not included

CE IP20 ENEC

Polished Gold - 2700K	1A5761900.27.20
Polished Gold - 3000K	1A5761900.30.20
Polished Black Chrome - 2700K	1A5762800.27.20
Polished Black Chrome - 3000K	1A5762800.30.20



MAGIA DOWN

21W

24V DC

2700K - 1290lm / 3000K - 1358lm

CRI >90

Driver not included

CE IP20 ENEC

Polished Gold - 2700K	1A5771900.27.20
Polished Gold - 3000K	1A5771900.30.20
Polished Black Chrome - 2700K	1A5772800.27.20
Polished Black Chrome - 3000K	1A5772800.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Wire guide / Guidacavo


Matt Black

1 Piece

1X0020400.01.00

Not included

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore

Matt White

Input 220-240V - 50/60Hz

Output 24V - Max 21W - IP20


DALI - PUSH - 1-10V - TRIAC

Max 1 module	1A4780300.00.05
--------------	-----------------

Not included

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore

Matt White

Input 120-240V - 50/60Hz

Output 24V - Max 3x21W - IP20

DALI - PUSH - 1-10V - TRIAC

Max 3 modules	1A4740300.00.05
---------------	-----------------

Not included



Ceiling rose without driver / Rosone senza alimentatore

Matt White

For electrical cables - 1 Piece

	1X0010300.02.00
--	-----------------

Not included

Matt Black

For electrical cables - 1 Piece

	1X0010400.02.00
--	-----------------

Recessed rose without driver / Rosone da incasso senza alimentatore

Matt White

For electrical cables - 1 Piece

Plasterboard cut-out Ø 44 mm

Minimum space for mounting 70 mm

For 12,5 mm plasterboard

	1X0000300.02.00
--	-----------------

Not included

Matt Black

For electrical cables - 1 Piece


Plasterboard cut-out Ø 44 mm

Minimum space for mounting 70 mm

For 12,5 mm plasterboard

	1X0000400.02.00
--	-----------------

Drivers / Alimentatori




Driver / Alimentatore

100-240V

24V/50W/IP20/ON/OFF

Max 1 module	1Z1120490
--------------	-----------

Not included




Driver / Alimentatore

100-240V

24V/80W/IP20/ON/OFF

Max 3 modules	1Z1120440
---------------	-----------

Not included




Driver / Alimentatore

100-240V

24V/150W/IP67/1-10V

Max 6 modules	1Z1120500
---------------	-----------

Not included




Controller

DALI - PUSH - 0/1-10V - TRIAC - IP20


	1Z2170010
--	-----------

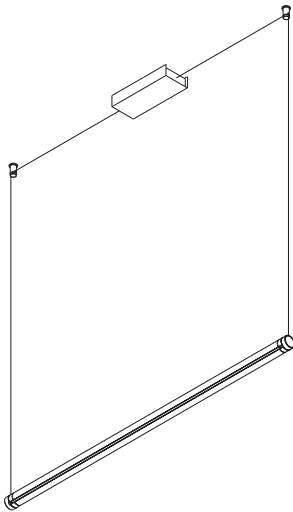Not included






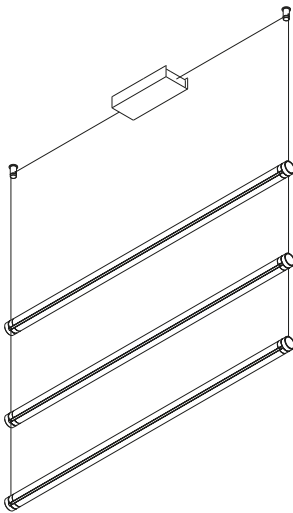
Example of single installation with ceiling rose with driver



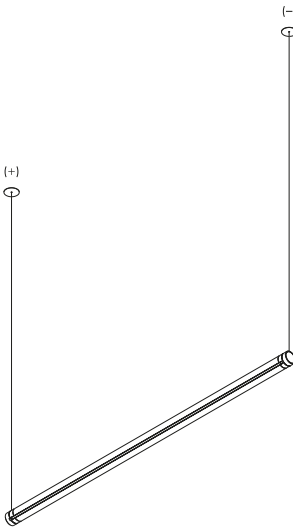
Example of multiple installation with ceiling rose with driver



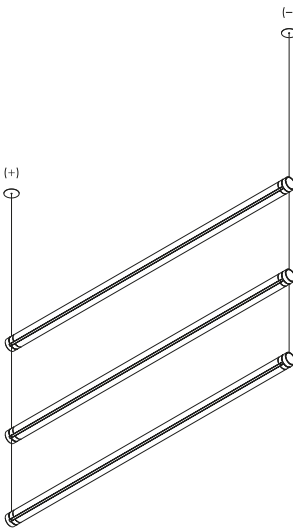
Example of single installation with recessed rose without driver



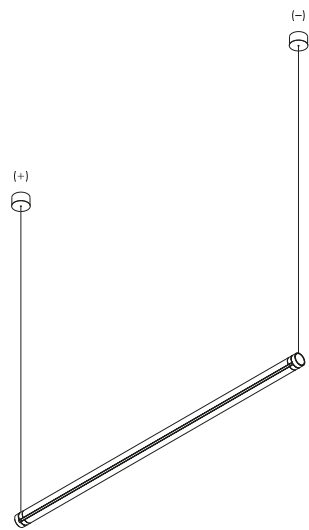
Example of multiple installation with recessed rose without driver



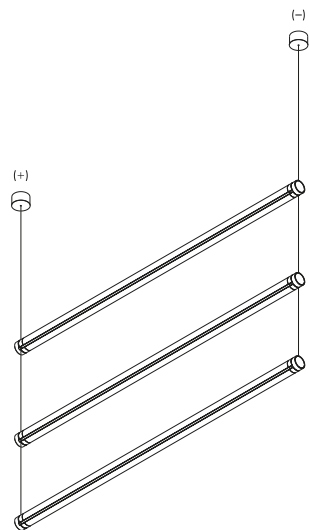Example of single installation with ceiling rose without driver



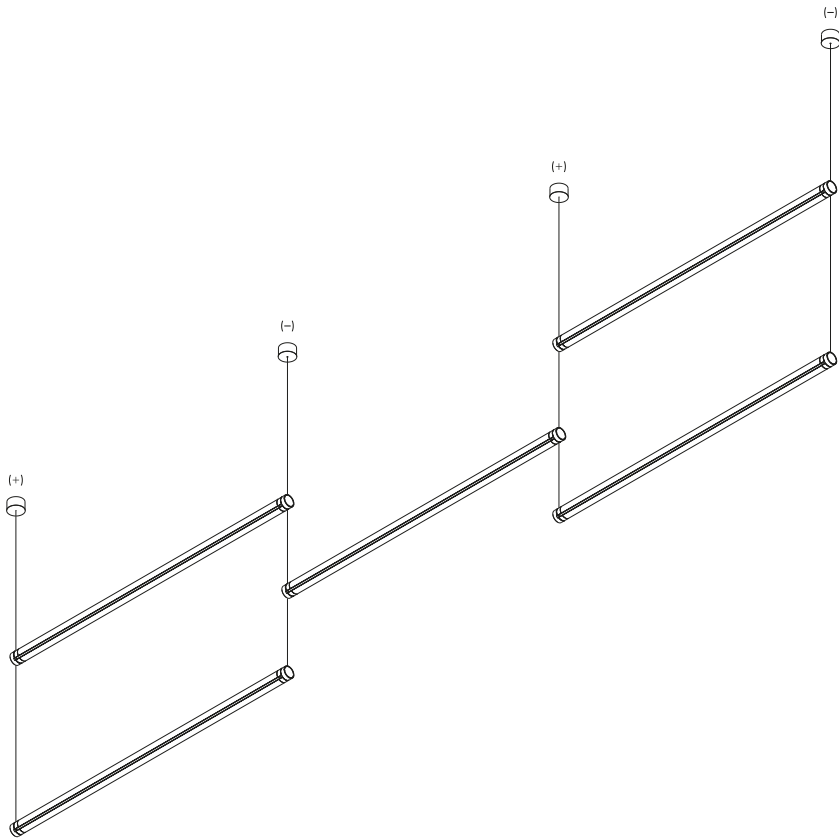Example of multiple installation with ceiling rose without driver



Example of multiple installation | Max 3 modules for cable



Suspension luminaire with direct light for indoor use.

Apparecchio di illuminazione a sospensione, a luce diretta, per interni.

A scientific-looking bulb made from blown glass.
The shape brings to mind a light bulb that was never born. Think steampunk: situations in which instruments were inspired by the rudiments of electricity.

Un'ampolla di vetro soffiato a bocca dall'aspetto scientifico.
La forma evoca quella di una lampadina mai nata, atmosfere steampunk, situazioni in cui le strumentazioni erano attivate dalle prime forme di elettricità.

The roses available are in textured matt black or matt white painted steel.
The brass body comes in a range of painted or galvanised finishes.
The diffuser is in transparent blown borosilicate glass and sanded on the lower side.

I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato.
Il corpo è in ottone in varie finiture verniciate o galvanizzate.
Il diffusore è in vetro borosilicato trasparente soffiato e sabbiato nella parte inferiore.

The light source is LED with integrated module.
The electric cable is in matt white or matt black, depending on the luminaire finish.
A range of roses and power supplies are available.

La sorgente luminosa è a LED e a modulo integrato.
Il cavo elettrico è di colore bianco opaco o nero opaco in funzione della finitura dell'apparecchio.
Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.03	Matt White	(White cable)	.08	Brushed Brass	(Black cable)
	.28	Polished Black Chrome	(Black cable)			

 Custom finish available on request.
Finitura personalizzata su richiesta.



CATHODE

4W

Max 350mA DC

2700K - 264lm / 3000K - 284lm

CRI >90

Driver not included



Matt White - 2700K

1A2980300.27.20

Matt White - 3000K

1A2980300.30.20

Brushed Brass - 2700K

1A2980800.27.20

Brushed Brass - 3000K


1A2980800.30.20

Polished Black Chrome - 2700K

1A2982800.27.20

Polished Black Chrome - 3000K

1A2982800.30.20



CATHODE ENDLESS

ENDLESS version only

6,3W - 0,16A

48V DC

2700K - 264lm / 3000K - 284lm

CRI >90

Driver not included

See page ENDLESS



Matt White - 2700K

1A2980300.27.40

Matt White - 3000K

1A2980300.30.40

Brushed Brass - 2700K

1A2980800.27.40

Brushed Brass - 3000K

1A2980800.30.40

Polished Black Chrome - 2700K

1A2982800.27.40

Polished Black Chrome - 3000K

1A2982800.30.40

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore

Not included

Matt White

Input 220-240V - 50/60Hz
Output 350mA DC - Max 4W
IP20 - ON/OFF

CATHODE


1X0230300.01.00

Matt Black

Input 220-240V - 50/60Hz
Output 350mA DC - Max 4W
IP20 - ON/OFF

CATHODE

1X0230400.01.00



Ceiling rose with driver / Rosone con alimentatore

Not included

Matt White

Input 110-240V - 50/60Hz
Output 350mA DC - Max 4W
IP20 - DALI - PUSH - 1-10V

CATHODE

1X0230300.02.07

Matt Black

Input 110-240V - 50/60Hz
Output 350mA DC - Max 4W
IP20 - DALI - PUSH - 1-10V

CATHODE

1X0230400.02.07

Matt White

Input 220-240V - 50/60Hz
Output 350mA DC - Max 4W
IP20 - TRIAC/IGBT

CATHODE

1X0230300.03.02

Matt Black

Input 220-240V - 50/60Hz
Output 350mA DC - Max 4W
IP20 - TRIAC/IGBT

CATHODE

1X0230400.03.02

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose without driver / Rosone senza alimentatore

Not included

Matt White

For electrical cables - 1 Piece

CATHODE

1X0010300.06.00

Matt Black

For electrical cables - 1 Piece

CATHODE

1X0010400.06.00



Recessed rose without driver / Rosone da incasso senza alimentatore

Not included

Matt White

For electrical cables - 1 Piece
Plasterboard cut-out Ø 44 mm
Minimum space for mounting 70 mm
For 12,5 mm plasterboard

CATHODE


1X0000300.06.00

Matt Black

For electrical cables - 1 Piece
Plasterboard cut-out Ø 44 mm
Minimum space for mounting 70 mm
For 12,5 mm plasterboard

CATHODE

1X0000400.06.00



Recessed rose without driver / Rosone da incasso senza alimentatore

Not included

Matt White

Plasterboard cut-out 85x97 mm
Minimum space for mounting 120 mm
For 12,5 mm plasterboard

CATHODE


1X0230300.04.00

Matt Black

Plasterboard cut-out 85x97 mm
Minimum space for mounting 120 mm
For 12,5 mm plasterboard

CATHODE

1X0230400.04.00



BINARIO TRIFASE adapter / Adattatore per BINARIO TRIFASE

Not included

Matt White

Input 220-240V - 50/60Hz
Output 350mA DC - Max 14,7W
IP20 - DALI

CATHODE

1X0230300.05.01


Matt Black

Input 220-240V - 50/60Hz
Output 350mA DC - Max 14,7W
IP20 - DALI

CATHODE

1X0230400.05.01

Drivers / Alimentatori



Driver / Alimentatore


Not included

220-240V

350mA/17W/IP20/TRIAC/IGBT

CATHODE

1Z0240850.350



Driver / Alimentatore

Not included


220-240V(110-127V)

350mA/18,9W(13,5W)/IP20/DALI - PUSH CATHODE


1Z0241270.350

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Decentralization kit / Kit decentratore			Not included
	CATHODE	1A0360000.00.00	




Kit ceiling rose and decentralizer / Kit rosone e decentratore			Not included
Matt White	Transparent cable 3 m included	CATHODE	1A0770300.00.00
Matt Black	Transparent cable 3 m included	CATHODE	1A0770400.00.00





Suspension luminaire with direct light for indoor use.	The surprise of an extremely thin yet very bright lamp.	The roses available are in textured matt black or matt white painted steel. The body is in matt or brushed black, bronze or natural anodised aluminium. SOTTILE DE is dual emission.	The light source is LED with integrated module. The electric cable is coaxial and matt black. A range of roses and power supplies are available.
Apparecchio di illuminazione a sospensione, a luce diretta, per interni.	La sorpresa di una lampada estremamente sottile, ma al contempo molto luminosa.	I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. Il corpo è in alluminio anodizzato nero, bronzo o naturale, opaco e spazzolato. SOTTILE DE è a doppia emissione.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è coassiale e di colore nero opaco. Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.29	Brushed Bronze	.36	Brushed Black
	.44	Natural Aluminium		




SOTTILE

21W
24V DC
2700K - 852lm / 3000K - 897lm
CRI >90
Driver not included



Brushed Bronze - 2700K	1A4232900.27.20
Brushed Bronze - 3000K	1A4232900.30.20
Brushed Black - 2700K	1A4233600.27.20
Brushed Black - 3000K	1A4233600.30.20
Natural Aluminium - 2700K	1A4234400.27.20
Natural Aluminium - 3000K	1A4234400.30.20



SOTTILE DE


42W
24V DC
2700K - Up 852lm - Down 852lm /
3000K - Up 897lm - Down 897lm
CRI >90
Driver not included



Brushed Bronze - 2700K	1A4642900.27.20
Brushed Bronze - 3000K	1A4642900.30.20
Brushed Black - 2700K	1A4643600.27.20
Brushed Black - 3000K	1A4643600.30.20
Natural Aluminium - 2700K	1A4644400.27.20
Natural Aluminium - 3000K	1A4644400.30.20

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore			Not included
Matt White	Input 110-240V - 50/60Hz Output 24V DC - Max 42W IP20 - DALI - PUSH - 1-10V - TRIAC	1X0200300.16.05	
Matt Black	Input 110-240V - 50/60Hz Output 24V DC - Max 42W IP20 - DALI - PUSH - 1-10V - TRIAC	1X0200400.16.05	



Ceiling rose without driver / Rosone senza alimentatore			Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00	
Matt White	For electrical cables - 1 Piece	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00	


Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione




Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.01.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.04.00	

Drivers / Alimentatori




Driver / Alimentatore			Not included
100-240V	24V/50W/IP20/ON/OFF	1Z1120490	



Controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010	

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione




Sloped ceiling suspension hook / Gancio di sospensione per soffitto inclinato			Not included
	Chrome plated - 1 Piece	Use only with Ceiling rose with driver 1X020	1A0530000.00.00






Suspension luminaire with direct light for indoor use.	The surprise of an extremely thin yet very bright lamp.	The roses available are in textured matt black or matt white painted steel. The body is in matt or brushed black, bronze or natural anodised aluminium. SOTTILE SISTEMA DE is dual emission.	The light source is LED with integrated module. The modules can be combined using the special electro-mechanical joint. The electric cable is coaxial and matt black. A range of roses and power supplies are available.
Apparecchio di illuminazione a sospensione, a luce diretta, per interni.	La sorpresa di una lampada estremamente sottile, ma al contempo molto luminosa.	I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. Il corpo è in alluminio anodizzato nero, bronzo o naturale opaco e spazzolato. SOTTILE SISTEMA DE è a doppia emissione.	La sorgente luminosa è a LED e a modulo integrato. I moduli sono aggregabili con l'apposito giunto elettromeccanico. Il cavo elettrico è coassiale e di colore nero opaco. Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.29	Brushed Bronze	.36	Brushed Black
	.44	Natural Aluminium		




SOTTILE SISTEMA - 800
12W
24V DC
2700K - 496lm / 3000K - 522lm
CRI >90
Driver not included
CE IP20 E

Brushed Bronze - 2700K	1A6372900.27.20
Brushed Bronze - 3000K	1A6372900.30.20
Brushed Black - 2700K	1A6373600.27.20
Brushed Black - 3000K	1A6373600.30.20
Natural Aluminium - 2700K	1A6374400.27.20
Natural Aluminium - 3000K	1A6374400.30.20




SOTTILE SISTEMA - 1100
16W
24V DC
2700K - 667lm / 3000K - 702lm
CRI >90
Driver not included
CE IP20 E

Brushed Bronze - 2700K	1A6392900.27.20
Brushed Bronze - 3000K	1A6392900.30.20
Brushed Black - 2700K	1A6393600.27.20
Brushed Black - 3000K	1A6393600.30.20
Natural Aluminium - 2700K	1A6394400.27.20
Natural Aluminium - 3000K	1A6394400.30.20




SOTTILE SISTEMA - 1400
21W
24V DC
2700K - 852lm / 3000K - 897lm
CRI >90
Driver not included
CE IP20 E

Brushed Bronze - 2700K	1A6352900.27.20
Brushed Bronze - 3000K	1A6352900.30.20
Brushed Black - 2700K	1A6353600.27.20
Brushed Black - 3000K	1A6353600.30.20
Natural Aluminium - 2700K	1A6354400.27.20
Natural Aluminium - 3000K	1A6354400.30.20




SOTTILE SISTEMA DE - 800
24W
24V DC
2700K - Up 496lm - Down 496lm /
3000K - Up 522lm - Down 522lm
CRI >90
Driver not included
CE IP20 E

Brushed Bronze - 2700K	1A6382900.27.20
Brushed Bronze - 3000K	1A6382900.30.20
Brushed Black - 2700K	1A6383600.27.20
Brushed Black - 3000K	1A6383600.30.20
Natural Aluminium - 2700K	1A6384400.27.20
Natural Aluminium - 3000K	1A6384400.30.20



SOTTILE SISTEMA DE - 1100
32W
24V DC
2700K - Up 667lm - Down 667lm /
3000K - Up 702lm - Down 702lm
CRI >90
Driver not included
CE IP20 E

Brushed Bronze - 2700K	1A6402900.27.20
Brushed Bronze - 3000K	1A6402900.30.20
Brushed Black - 2700K	1A6403600.27.20
Brushed Black - 3000K	1A6403600.30.20
Natural Aluminium - 2700K	1A6404400.27.20
Natural Aluminium - 3000K	1A6404400.30.20




SOTTILE SISTEMA DE - 1400
42W
24V DC
2700K - Up 852lm - Down 852lm /
3000K - Up 897lm - Down 897lm
CRI >90
Driver not included
CE IP20 E

Brushed Bronze - 2700K	1A6362900.27.20
Brushed Bronze - 3000K	1A6362900.30.20
Brushed Black - 2700K	1A6363600.27.20
Brushed Black - 3000K	1A6363600.30.20
Natural Aluminium - 2700K	1A6364400.27.20
Natural Aluminium - 3000K	1A6364400.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



End cap with suspension cable / Tappo di chiusura con cavo di sospensione		Not included
Matt Black	1X0200400.13.00	



End cap with electrical cable / Tappo di chiusura con alimentazione		Not included
Matt Black	White electrical cable 5 m included	1X0200400.14.00
	Black electrical cable 5 m included	1X0200400.15.00

Suspension kits / Kit di sospensione




Ceiling rose without driver / Rosone senza alimentatore		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00




Recessed rose without driver / Rosone da incasso senza alimentatore		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.01.00
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.04.00

Drivers / Alimentatori




Driver / Alimentatore		Not included
100-240V	24V/50W/IP20/ON/OFF	1Z1120490



Driver / Alimentatore		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione



Fixed joint with suspension cable / Giunto fisso con cavo di sospensione		Not included
Matt Black	1X0200400.10.00	




Fixed joint with electrical cable / Giunto fisso con alimentazione		Not included
Matt Black	White electrical cable 5 m included	1X0200400.08.00
	Black electrical cable 5 m included	1X0200400.09.00




Flexible joint with suspension cable / Giunto orientabile con cavo di sospensione		Not included
Matt Black	1X0200400.07.00	



Flexible joint with electrical cable / Giunto orientabile con alimentazione		Not included
Matt Black	White electrical cable 5 m included	1X0200400.05.00
	Black electrical cable 5 m included	1X0200400.06.00



Fixed isolated joint with suspension cable / Giunto fisso isolato con cavo di sospensione		Not included
Matt Black	1X0200400.12.00	




Flexible isolated joint with suspension cable / Giunto orientabile isolato con cavo di sospensione		Not included
Matt Black	1X0200400.11.00	

MONO-EMISSION VERSION


Modules can be connected together up to a **Max 84W**

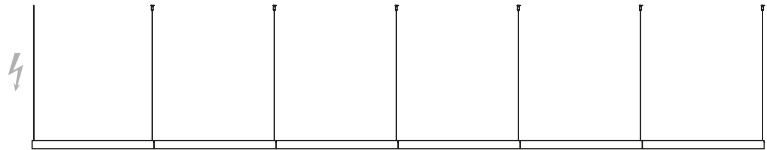Max 6 modules
per driver




SOTTILE SISTEMA - 800 | Single module power: 12W

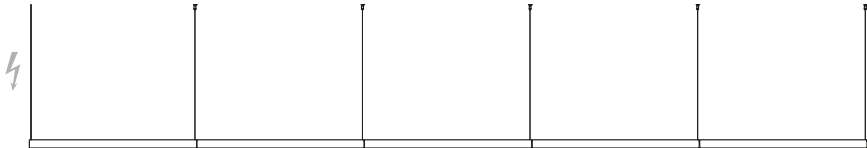Max 5 modules
per driver



SOTTILE SISTEMA - 1100 | Single module power: 16W

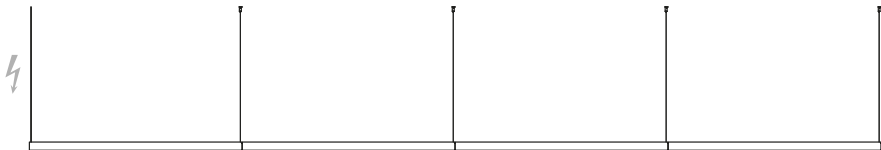Max 4 modules
per driver




SOTTILE SISTEMA - 1400 | Single module power: 21W

DUAL-EMISSION VERSION


Modules can be connected together up to a **Max 84W**

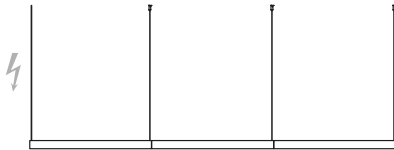Max 3 modules
per driver




SOTTILE SISTEMA DE - 800 | Single module power: 24W

Max 2 modules
per driver



SOTTILE SISTEMA DE - 1100 | Single module power: 32W

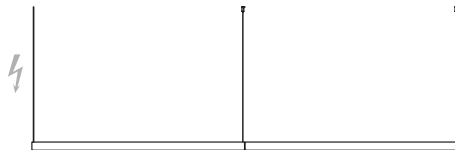
Max 2 modules
per driver



SOTTILE SISTEMA DE - 1400 | Single module power: 42W

Examples of installation with 1 driver and dedicated joints

DRIVER



A / FLEXIBLE JOINT
WITH ELECTRICAL CABLE
1X0200400.05.00
1X0200400.06.00

B - C / FLEXIBLE JOINT
WITH SUSPENSION CABLE
1X0200400.07.00

D / FLEXIBLE ISOLATED JOINT
WITH SUSPENSION CABLE
1X0200400.11.00

DRIVER



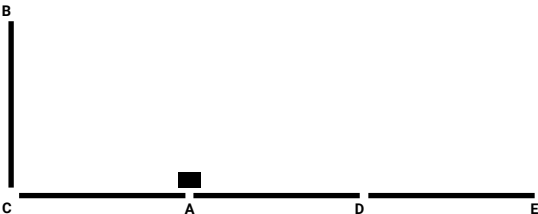
A / END CAP
WITH ELECTRICAL CABLE
1X0200400.14.00
1X0200400.15.00

B / FLEXIBLE JOINT
WITH SUSPENSION CABLE
1X0200400.07.00

C / FIXED JOINT
WITH SUSPENSION CABLE
1X0200400.10.00

D / END CAP
WITH SUSPENSION CABLE
1X0200400.13.00

DRIVER



A / FIXED JOINT
WITH ELECTRICAL CABLE
1X0200400.08.00
1X0200400.09.00

B / END CAP
WITH SUSPENSION CABLE
1X0200400.13.00

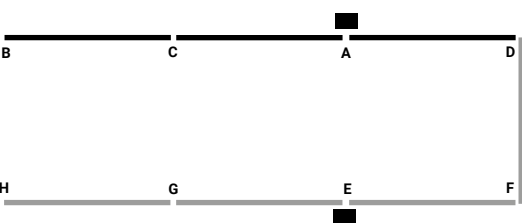
C / FLEXIBLE JOINT
WITH SUSPENSION CABLE
1X0200400.07.00

D / FIXED JOINT
WITH SUSPENSION CABLE
1X0200400.10.00

E / END CAP
WITH SUSPENSION CABLE
1X0200400.13.00

Examples of installation with 2 drivers and dedicated joints

2x DRIVER



A - E / FIXED JOINT
WITH ELECTRICAL CABLE
1X0200400.08.00
1X0200400.09.00


B - H / END CAP
WITH SUSPENSION CABLE
1X0200400.13.00

C - G / FIXED JOINT
WITH SUSPENSION CABLE
1X0200400.10.00

D / FLEXIBLE ISOLATED JOINT
WITH SUSPENSION CABLE
1X0200400.11.00

F / FLEXIBLE JOINT
WITH SUSPENSION CABLE
1X0200400.07.00

2x DRIVER




A - B / FLEXIBLE JOINT
WITH ELECTRICAL CABLE
1X0200400.05.00
1X0200400.06.00

C - F / END CAP
WITH SUSPENSION CABLE
1X0200400.13.00

D / FLEXIBLE JOINT
WITH SUSPENSION CABLE
1X0200400.07.00

E / FLEXIBLE ISOLATED JOINT
WITH SUSPENSION CABLE
1X0200400.11.00

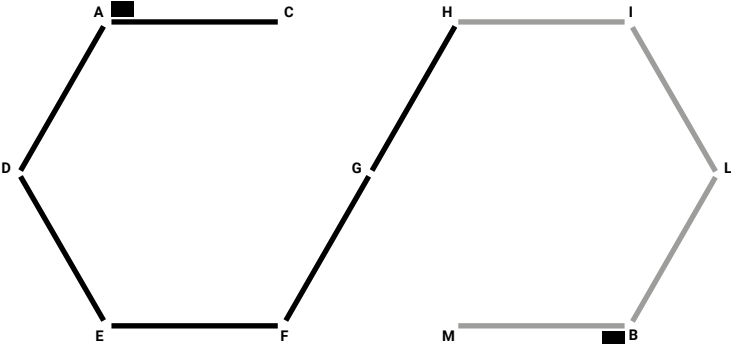2x DRIVER




A - B / FLEXIBLE JOINT
WITH ELECTRICAL CABLE
1X0200400.05.00
1X0200400.06.00

C - M / END CAP
WITH SUSPENSION CABLE
1X0200400.13.00

D - E - F - I - L / FLEXIBLE JOINT
WITH SUSPENSION CABLE
1X0200400.07.00

G / FIXED JOINT
WITH SUSPENSION CABLE
1X0200400.10.00

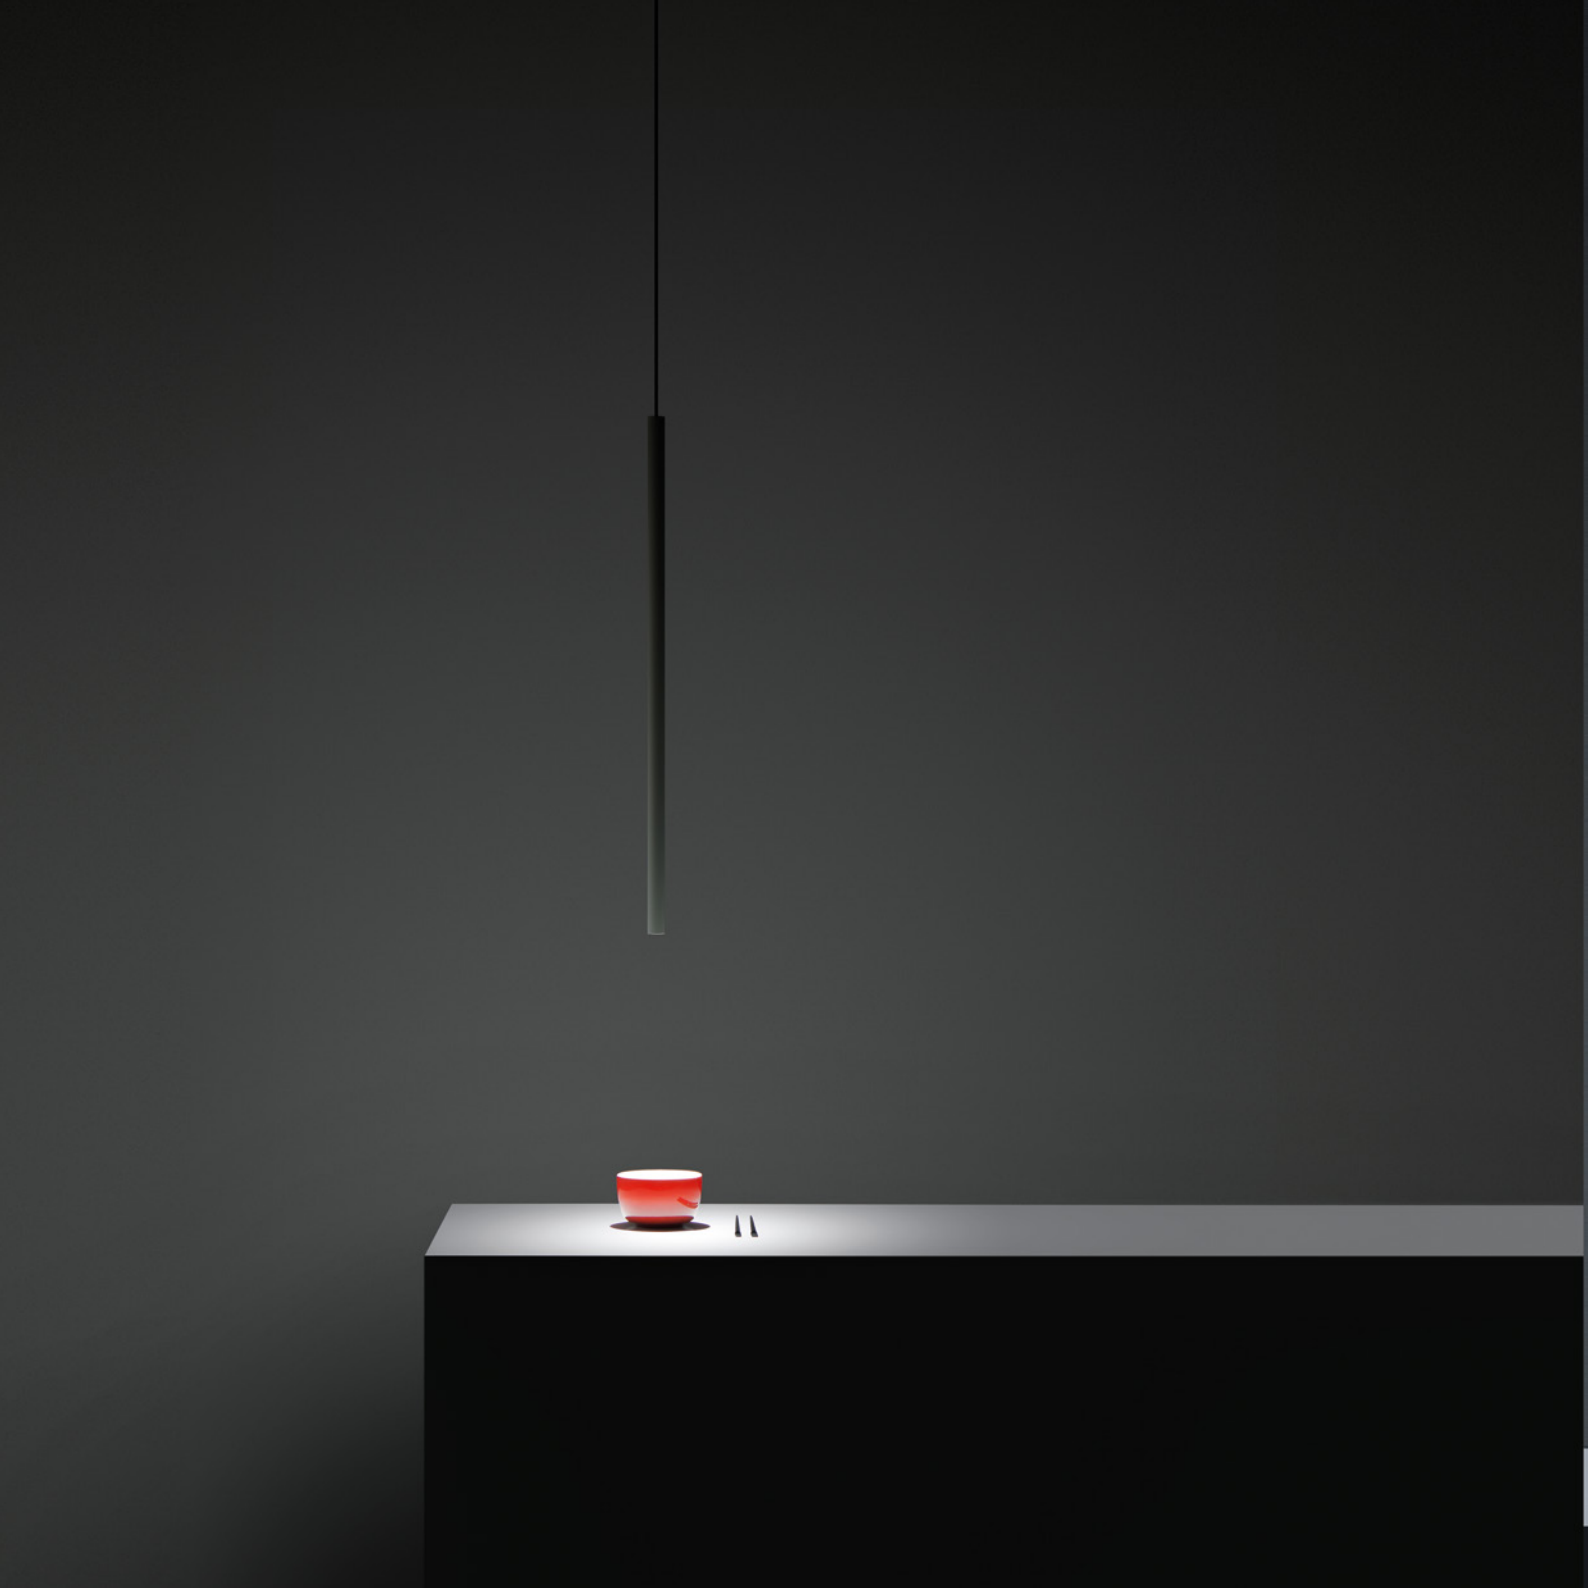H / FLEXIBLE ISOLATED JOINT
WITH SUSPENSION CABLE
1X0200400.11.00




Suspension luminaire with direct light for indoor use.	So slim and essential... A small tube that lights the table with wonder.	The roses available are in textured matt black or matt white painted steel. The brass body comes in a range of painted or galvanised finishes.	The light source is LED with integrated module. The electric cable is in matt white or matt black, depending on the luminaire finish. A range of roses and power supplies are available.
Apparecchio di illuminazione a sospensione, a luce diretta, per interni.	Così esile ed essenziale... Un tubo sottile per fare una meravigliosa luce sul tavolo.	I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. Il corpo è in ottone in varie finiture verniciate o galvanizzate.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore bianco opaco o nero opaco in funzione della finitura. Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.03	Matt White	(White cable)	.04	Matt Black	(White cable)
	.08	Brushed Brass	(Black cable)	.26	Total Black	(Black cable)
	.28	Polished Black Chrome	(Black cable)			




Custom finish available on request.
Finitura personalizzata su richiesta.



MISS
4W
Max 350mA DC
2700K - 290lm / 3000K - 310lm
CRI >90
Driver not included
  IP20

Matt White - 2700K	1A2960300.27.20
Matt White - 3000K	1A2960300.30.20
Matt Black - 2700K	1A2960400.27.20
Matt Black - 3000K	1A2960400.30.20
Brushed Brass - 2700K	1A2960800.27.20
Brushed Brass - 3000K	1A2960800.30.20
Total Black - 2700K	1A2962600.27.20
Total Black - 3000K	1A2962600.30.20
Polished Black Chrome - 2700K	1A2962800.27.20
Polished Black Chrome - 3000K	1A2962800.30.20



MISS ENDLESS
Endless version only
6,3W - 0,16A
48V DC
2700K - 290lm / 3000K - 310lm
CRI >90
Driver not included
See page ENDLESS
  IP20 


Matt White - 2700K	1A2960300.27.40
Matt White - 3000K	1A2960300.30.40
Matt Black - 2700K	1A2960400.27.40
Matt Black - 3000K	1A2960400.30.40
Brushed Brass - 2700K	1A2960800.27.40
Brushed Brass - 3000K	1A2960800.30.40
Total Black - 2700K	1A2962600.27.40
Total Black - 3000K	1A2962600.30.40
Polished Black Chrome - 2700K	1A2962800.27.40
Polished Black Chrome - 3000K	1A2962800.30.40

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore				Not included
Matt White	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - ON/OFF	MISS	1X0230300.01.00	
Matt Black	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - ON/OFF	MISS	1X0230400.01.00	



Ceiling rose with driver / Rosone con alimentatore				Not included
Matt White	Input 110-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - DALI - PUSH - 1-10V	MISS	1X0230300.02.07	
Matt Black	Input 110-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - DALI - PUSH - 1-10V	MISS	1X0230400.02.07	
Matt White	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - TRIAC/IGBT	MISS	1X0230300.03.02	
Matt Black	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - TRIAC/IGBT	MISS	1X0230400.03.02	

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione




Ceiling rose without driver / Rosone senza alimentatore				Not included
Matt White	For electrical cables - 1 Piece	MISS	1X0010300.06.00	
Matt Black	For electrical cables - 1 Piece	MISS	1X0010400.06.00	



Recessed rose without driver / Rosone da incasso senza alimentatore				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	MISS	1X0000300.06.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	MISS	1X0000400.06.00	



Recessed rose without driver / Rosone da incasso senza alimentatore				Not included
Matt White	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	MISS	1X0230300.04.00	
Matt Black	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	MISS	1X0230400.04.00	



BINARIO TRIFASE adapter / Adattatore per BINARIO TRIFASE				Not included
Matt White	Input 220-240V - 50/60Hz Output 350mA DC - Max 14,7W IP20 - DALI	MISS	1X0230300.05.01	
Matt Black	Input 220-240V - 50/60Hz Output 350mA DC - Max 14,7W IP20 - DALI	MISS	1X0230400.05.01	

Drivers / Alimentatori




Driver / Alimentatore				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	MISS	1Z0240850.350	




Driver / Alimentatore				Not included
220-240V(110-127V)	350mA/18,9W(13,5W)/IP20/DALI - PUSH	MISS	1Z0241270.350	

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Decentralization kit / Kit decentratore			Not included
	MISS	1A0360000.00.00	



Kit ceiling rose and decentralizer / Kit rosone e decentratore			Not included
Matt White	Transparent cable 3 m included	MISS	1A0770300.00.00
Matt Black	Transparent cable 3 m included	MISS	1A0770400.00.00





Suspension luminaire with direct and indirect light, for indoor use.

LOUIS XIV is the "freakiest" letter of our light alphabet. A disobedient design that translates a certain rebellion to common lamp models into light.

Apparecchio di illuminazione a sospensione, a luce diretta e indiretta, per interni.


LOUIS XIV è la lettera più "freak" del nostro alfabeto luminoso. È un progetto disobbediente, che traduce in luce una certa ribellione ai modelli comuni di fare lampade.

The roses available are in textured black or matt white painted steel. The structure is in polished gold galvanised brass. The arms are in natural brass. The drops are in prismatic crystal glass. The birds are hand-made. LOUIS XIV is dual emission.

I rosoni disponibili sono in acciaio verniciato bianco opaco o nero texturizzato. La struttura è in ottone galvanizzata oro lucido. I bracci sono in ottone naturale. Le gocce sono in cristallo prismaticizzato. Gli uccellini sono realizzati a mano. LOUIS XIV è a doppia emissione.

The light sources are LED, with integrated module and can be powered separately. The electric cable is matt white. A range of roses and power supplies are available.

Le sorgenti luminose sono a LED e a modulo integrato e alimentabili separatamente. Il cavo elettrico è di colore bianco opaco. Sono disponibili vari rosoni e sistemi di alimentazione.



LOUIS XIV

14W

Max 250mA DC

2700K - Up 842lm - Down 198lm /

3000K - Up 842lm - Down 198lm

CRI >90

UGR <19

Driver not included


2 Drivers required



Polished Gold - 2700K	1A4361900.27.20
Polished Gold - 3000K	1A4361900.30.20

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore			Not included
Matt White	Input 110-240V - 50/60Hz Output 250mA DC - Max 14W IP20 - DALI - PUSH - 1-10V	1X0260300.02.07	
Matt Black	Input 110-240V - 50/60Hz Output 250mA DC - Max 14W IP20 - DALI - PUSH - 1-10V	1X0260400.02.07	
Matt White	Input 220-240V - 50/60Hz Output 250mA DC - Max 14W IP20 - TRIAC/IGBT	1X0260300.01.02	
Matt Black	Input 220-240V - 50/60Hz Output 250mA DC - Max 14W IP20 - TRIAC/IGBT	1X0260400.01.02	




Ceiling rose without driver / Rosone senza alimentatore			Not included
Matt White	For electrical cables - 1 Piece	1X0010300.05.00	
Matt Black	For electrical cables - 1 Piece	1X0010400.05.00	



Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.05.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.05.00	

Compulsory accessories / Accessori obbligatori

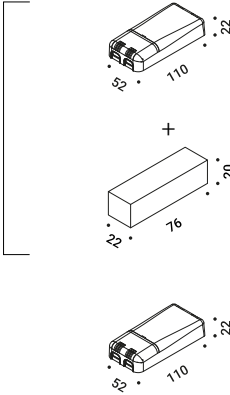Drivers / Alimentatori



Driver for uplight emission / Alimentatore per emissione uplight			Not included
220-240V	250mA/12,5W/IP20/TRIAC/IGBT	1Z0241280	


Driver for downlight emission / Alimentatore per emissione downlight			Not included
100-277V	250mA/3W/IP20/TRIAC/IGBT	1Z0400900	

Driver / Alimentatore			Not included
220-240V(110-127V)	250mA/13,5W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.250	



Suspension luminaire with direct and indirect light, for indoor use.	A thin, suspended circular mirror with direct and indirect light. The sophisticated clamping system is used to position and angle the disc however you wish.	The roses available are in textured matt black or matt white painted steel. The disc is in mirror-finished aluminium. The back of the mirror is painted in matt black. The disc can be adjusted on the suspension cables. CARTESIO is dual emission.	The sources are LED with an integrated module and can be powered separately. The electric cable is matt white. A range of roses and power supplies are available.
Apparecchio di illuminazione a sospensione, a luce diretta e indiretta, per interni.	Uno specchio circolare sottile e sospeso, a luce diretta e indiretta. Il sofisticato sistema di fissaggio permette di posizionare e inclinare il disco come si desidera.	I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. Il disco è in alluminio con finitura a specchio. Il retro dello specchio è verniciato nero opaco. Il disco è orientabile agendo sui cavi di sospensione. CARTESIO è a doppia emissione.	Le sorgenti sono a LED e a modulo integrato e alimentabili separatamente. Il cavo elettrico è di colore bianco opaco. Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.00	Standard
--------	-----	----------



CARTESIO 60

42W

Max 500mA DC

2700K - Up 1747lm - Down 1568lm /

3000K - Up 1864lm - Down 1568lm


CRI >90

Driver not included

2 Drivers required

CE IP20

Standard - 2700K	1A6080000.27.20
Standard - 3000K	1A6080000.30.20



CARTESIO 90

42W

Max 500mA DC

2700K - Up 1747lm - Down 1568lm /

3000K - Up 1864lm - Down 1568lm

CRI >90

Driver not included


2 Drivers required

CE IP20

Standard - 2700K	1A6090000.27.20
Standard - 3000K	1A6090000.30.20

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore			Not included
Matt White	Input 110-240V - 50/60Hz Output 500mA DC - Max 42W IP20 - DALI - PUSH - 1-10V	1X0270300.02.07	
Matt Black	Input 110-240V - 50/60Hz Output 500mA DC - Max 42W IP20 - DALI - PUSH - 1-10V	1X0270400.02.07	
Matt White	Input 220-240V - 50/60Hz Output 400mA DC - Max 42W IP20 - TRIAC/IGBT	1X0270300.01.02	
Matt Black	Input 220-240V - 50/60Hz Output 400mA DC - Max 42W IP20 - TRIAC/IGBT	1X0270400.01.02	



Ceiling rose without driver / Rosone senza alimentatore			Not included
Matt White	For electrical cables - 1 Piece	1X0010300.05.00	
Matt Black	For electrical cables - 1 Piece	1X0010400.05.00	


Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione




Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.05.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.05.00	

Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V	400mA/19W/IP20/TRIAC/IGBT	1Z0240850.400	




Driver / Alimentatore			Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500	



Suspension luminaire with direct light for indoor use.	The idea is to bring light wherever you like, starting from a socket. A simple project, almost a revival of the old electrical wiring. A plug, a cable, some isolators, a socket and a LED lamp.	The rose is in textured matt white or textured matt black painted steel. The spotlight is in textured matt black or textured matt white painted aluminium. The cable clips are in textured matt black or textured matt white painted PVC, depending on the finish. NEURO is also available in the outdoor version.	It requires an E27 LED bulb, which is not included but is available as an accessory. The electric cable is matt white or matt black and is 10 m long.
Apparecchio di illuminazione a sospensione, a luce diretta, per interni.	È l'idea di portare la luce dove si desidera, partendo da una presa elettrica. Un progetto semplice, quasi la rivisitazione dei vecchi impianti elettrici. Una spina, un cavo, degli isolatori, un portalampada e una lampadina a LED.	Il rosone è in acciaio verniciato bianco opaco texturizzato o nero opaco texturizzato. Il proiettore è in alluminio verniciato bianco opaco texturizzato o nero opaco texturizzato. I bloccacavo sono in PVC verniciati bianco opaco texturizzato o nero opaco texturizzato in funzione della finitura. NEURO è disponibile anche in versione outdoor.	La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio. Il cavo elettrico è di colore bianco opaco o nero opaco e 10 m di lunghezza.

Finish	.03 Matt White	.04 Matt Black
	 Custom finish available on request. Finitura personalizzata su richiesta.	



NEURO
Max 15W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Matt White - ON/OFF	1A0160300.00.00
Matt Black - ON/OFF	1A0160400.00.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Wall and ceiling rose / Rosone da parete e soffitto		Not included
Matt White		1X0030300.01.00
Matt Black		1X0030400.01.00




Cable clamp / Bloccacavo		Included
Matt White	1 Piece	1X0110300.02.00
Matt Black	1 Piece	1X0110400.02.00

Bulbs / Lampadine




LED - E27 - PAR30s		Not included
	220-240V - 9,5W - 25° 3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	1Y0330730



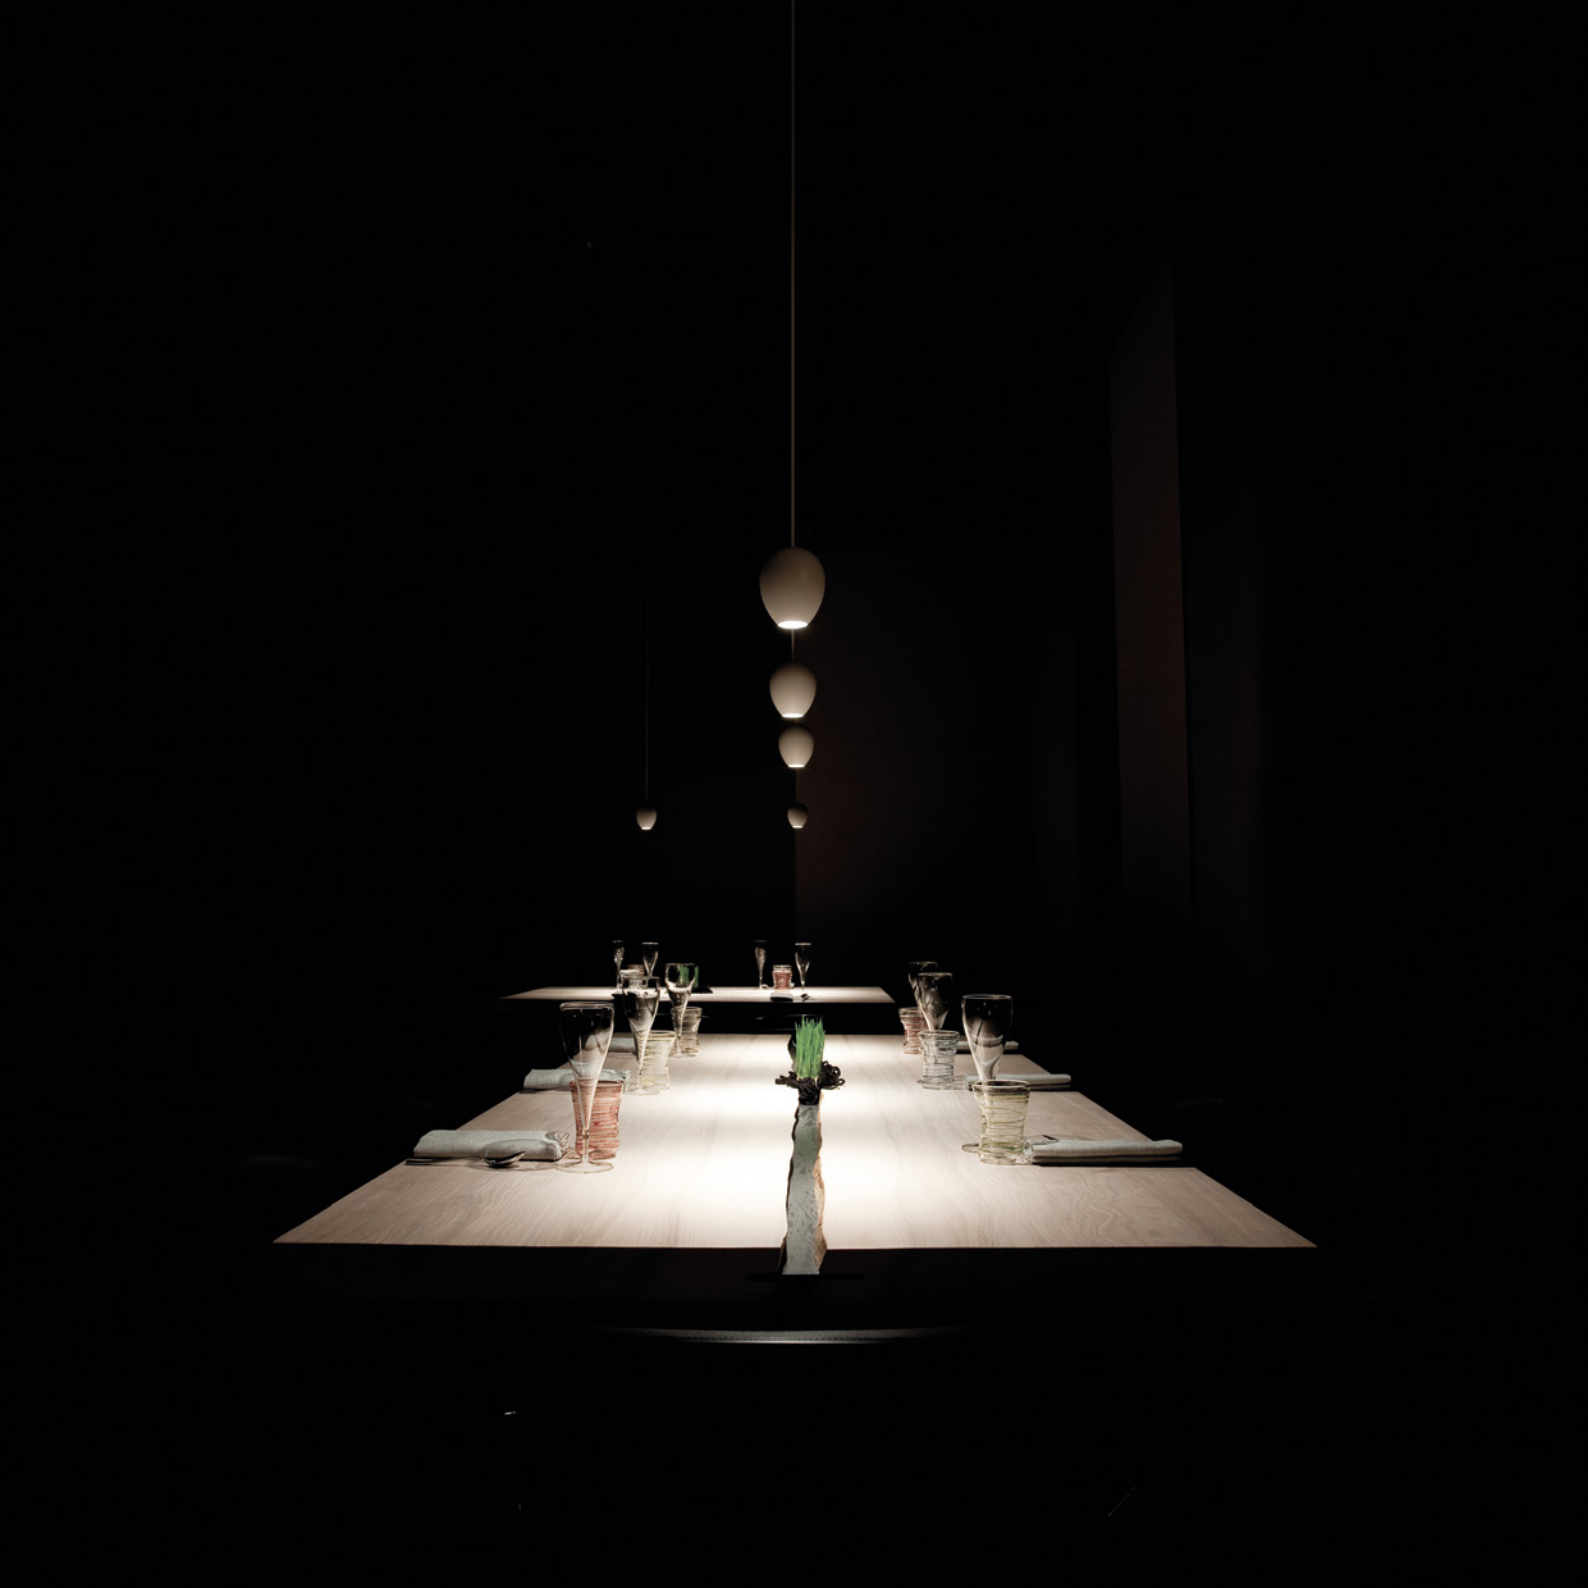

Suspension luminaire with direct light for indoor use.	The light in the plate is the most beautiful light. Light understood as an ingredient in the kitchen, used with decisive flair.	The roses available are in textured matt black or matt white painted steel. The body is in matt white painted aluminium.	The light source is LED with integrated module. The electric cable is matt white. A range of roses and power supplies are available.
Apparecchio di illuminazione a sospensione, a luce diretta, per interni.	La luce nel piatto è la luce più bella. La luce intesa come ingrediente della cucina, usata con garbo, ma nello stesso tempo con decisione.	I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. Il corpo è in alluminio verniciato bianco opaco.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore bianco opaco. Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.03 Matt White
	 Custom finish available on request. Finitura personalizzata su richiesta.




OVO
4W
Max 350mA DC
2700K - 352lm / 3000K - 379lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K	1A6450300.27.20
Matt White - 3000K	1A6450300.30.20



OVO ENDLESS
Endless version only
6,3W - 0,16A
48V DC
2700K - 352lm / 3000K - 379lm
CRI >90
Driver not included
See page ENDLESS
CE IP20 ENEC

Matt White - 2700K	1A6450300.27.40
Matt White - 3000K	1A6450300.30.40



OVONELPIATTO
4W
Max 350mA DC
2700K - 352lm / 3000K - 379lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K	1A6530300.27.20
Matt White - 3000K	1A6530300.30.20






OVONELPIATTO ENDLESS
Endless version only
6,3W - 0,16A
48V DC
2700K - 352lm / 3000K - 379lm
CRI >90
Driver not included
See page ENDLESS
CE IP20 ENEC

Matt White - 2700K	1A6530300.27.40
Matt White - 3000K	1A6530300.30.40

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore				Not included
Matt White	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - ON/OFF	OVO / OVONELPIATTO	1X0230300.01.00	
Matt Black	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - ON/OFF	OVO / OVONELPIATTO	1X0230400.01.00	

Ceiling rose with driver / Rosone con alimentatore				Not included
Matt White	Input 110-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - DALI - PUSH - 1-10V	OVO / OVONELPIATTO	1X0230300.02.07	
Matt Black	Input 110-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - DALI - PUSH - 1-10V	OVO / OVONELPIATTO	1X0230400.02.07	
Matt White	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - TRIAC/IGBT	OVO / OVONELPIATTO	1X0230300.03.02	
Matt Black	Input 220-240V - 50/60Hz Output 350mA DC - Max 4W IP20 - TRIAC/IGBT	OVO / OVONELPIATTO	1X0230400.03.02	


Ceiling rose without driver / Rosone senza alimentatore				Not included
Matt White	For electrical cables - 1 Piece	OVO / OVONELPIATTO	1X0010300.06.00	
Matt Black	For electrical cables - 1 Piece	OVO / OVONELPIATTO	1X0010400.06.00	

Compulsory accessories / Accessori obbligatori


Suspension kits / Kit di sospensione



Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	OVO / OVONELPIATTO	1X0000300.06.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	OVO / OVONELPIATTO	1X0000400.06.00




Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	OVO / OVONELPIATTO	1X0230300.04.00
Matt Black	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	OVO / OVONELPIATTO	1X0230400.04.00




BINARIO TRIFASE adapter / Adattatore per BINARIO TRIFASE			Not included
Matt White	Input 220-240V - 50/60Hz Output 350mA DC - Max 14,7W IP20 - DALI	OVO / OVONELPIATTO	1X0230300.05.01
Matt Black	Input 220-240V - 50/60Hz Output 350mA DC - Max 14,7W IP20 - DALI	OVO / OVONELPIATTO	1X0230400.05.01

Drivers / Alimentatori




Driver / Alimentatore			Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	OVO / OVONELPIATTO	1Z0240850.350




Driver / Alimentatore			Not included
220-240V(110-127V)	350mA/18,9W(13,5W)/IP20/DALI - PUSH - 1-10V	OVO / OVONELPIATTO	1Z0241270.350

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Decentralization kit / Kit decentratore			Not included
		OVO / OVONELPIATTO	1A0360000.00.00




Kit ceiling rose and decentralizer / Kit rosone e decentratore			Not included
Matt White	Transparent cable 3 m included	OVO / OVONELPIATTO	1A0770300.00.00
Matt Black	Transparent cable 3 m included	OVO / OVONELPIATTO	1A0770400.00.00





Suspension luminaire with direct and indirect light, for indoor use.	The purity of the suspended cone encases a small light machine that produces direct and indirect light at the same time.	The roses available are in textured matt black or matt white painted steel. The body is in textured matt white painted aluminium. The tube is in polished gold galvanised brass. SOTTOSOPRA is dual emission.	The light sources are LED with integrated module and can be powered separately. The electric cable is white. A range of roses and power supplies are available.
Apparecchio di illuminazione a sospensione, a luce diretta e indiretta, per interni.	La purezza del cono sospeso racchiude una piccola macchina di luce che produce contemporaneamente luce diretta e indiretta.	I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. Il corpo è in alluminio verniciato bianco opaco texturizzato. Il tubo è in ottone galvanizzato oro lucido. SOTTOSOPRA è a doppia emissione.	Le sorgenti luminose sono a LED e a modulo integrato e alimentabili separatamente. Il cavo elettrico è di colore bianco. Sono disponibili vari rosoni e sistemi di alimentazione.

Finish	.03 Matt White
	 Custom finish available on request. Finitura personalizzata su richiesta.



SOTTOSOPRA

24W

Max 500mA DC

2700K - Up 375lm - Down 366lm /

3000K - Up 387lm - Down 366lm

CRI >90

UGR <19

Driver not included


2 Drivers required




Matt White - 2700K	1A4540300.27.20
Matt White - 3000K	1A4540300.30.20

Compulsory accessories / Accessori obbligatori


Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore			Not included
Matt White	Input 110-240V - 50/60Hz Output 500mA DC - Max 24W IP20 - DALI - PUSH - 1-10V	1X0250300.02.07	
Matt Black	Input 110-240V - 50/60Hz Output 500mA DC - Max 24W IP20 - DALI - PUSH - 1-10V	1X0250400.02.07	
Matt White	Input 220-240V - 50/60Hz Output 500mA DC - Max 24W IP20 - TRIAC/IGBT	1X0250300.01.02	
Matt Black	Input 220-240V - 50/60Hz Output 500mA DC - Max 24W IP20 - TRIAC/IGBT	1X0250400.01.02	




Ceiling rose without driver / Rosone senza alimentatore			Not included
Matt White	For electrical cables - 1 Piece	1X0010300.05.00	
Matt Black	For electrical cables - 1 Piece	1X0010400.05.00	




Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.05.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.05.00	

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500



Driver / Alimentatore		Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500

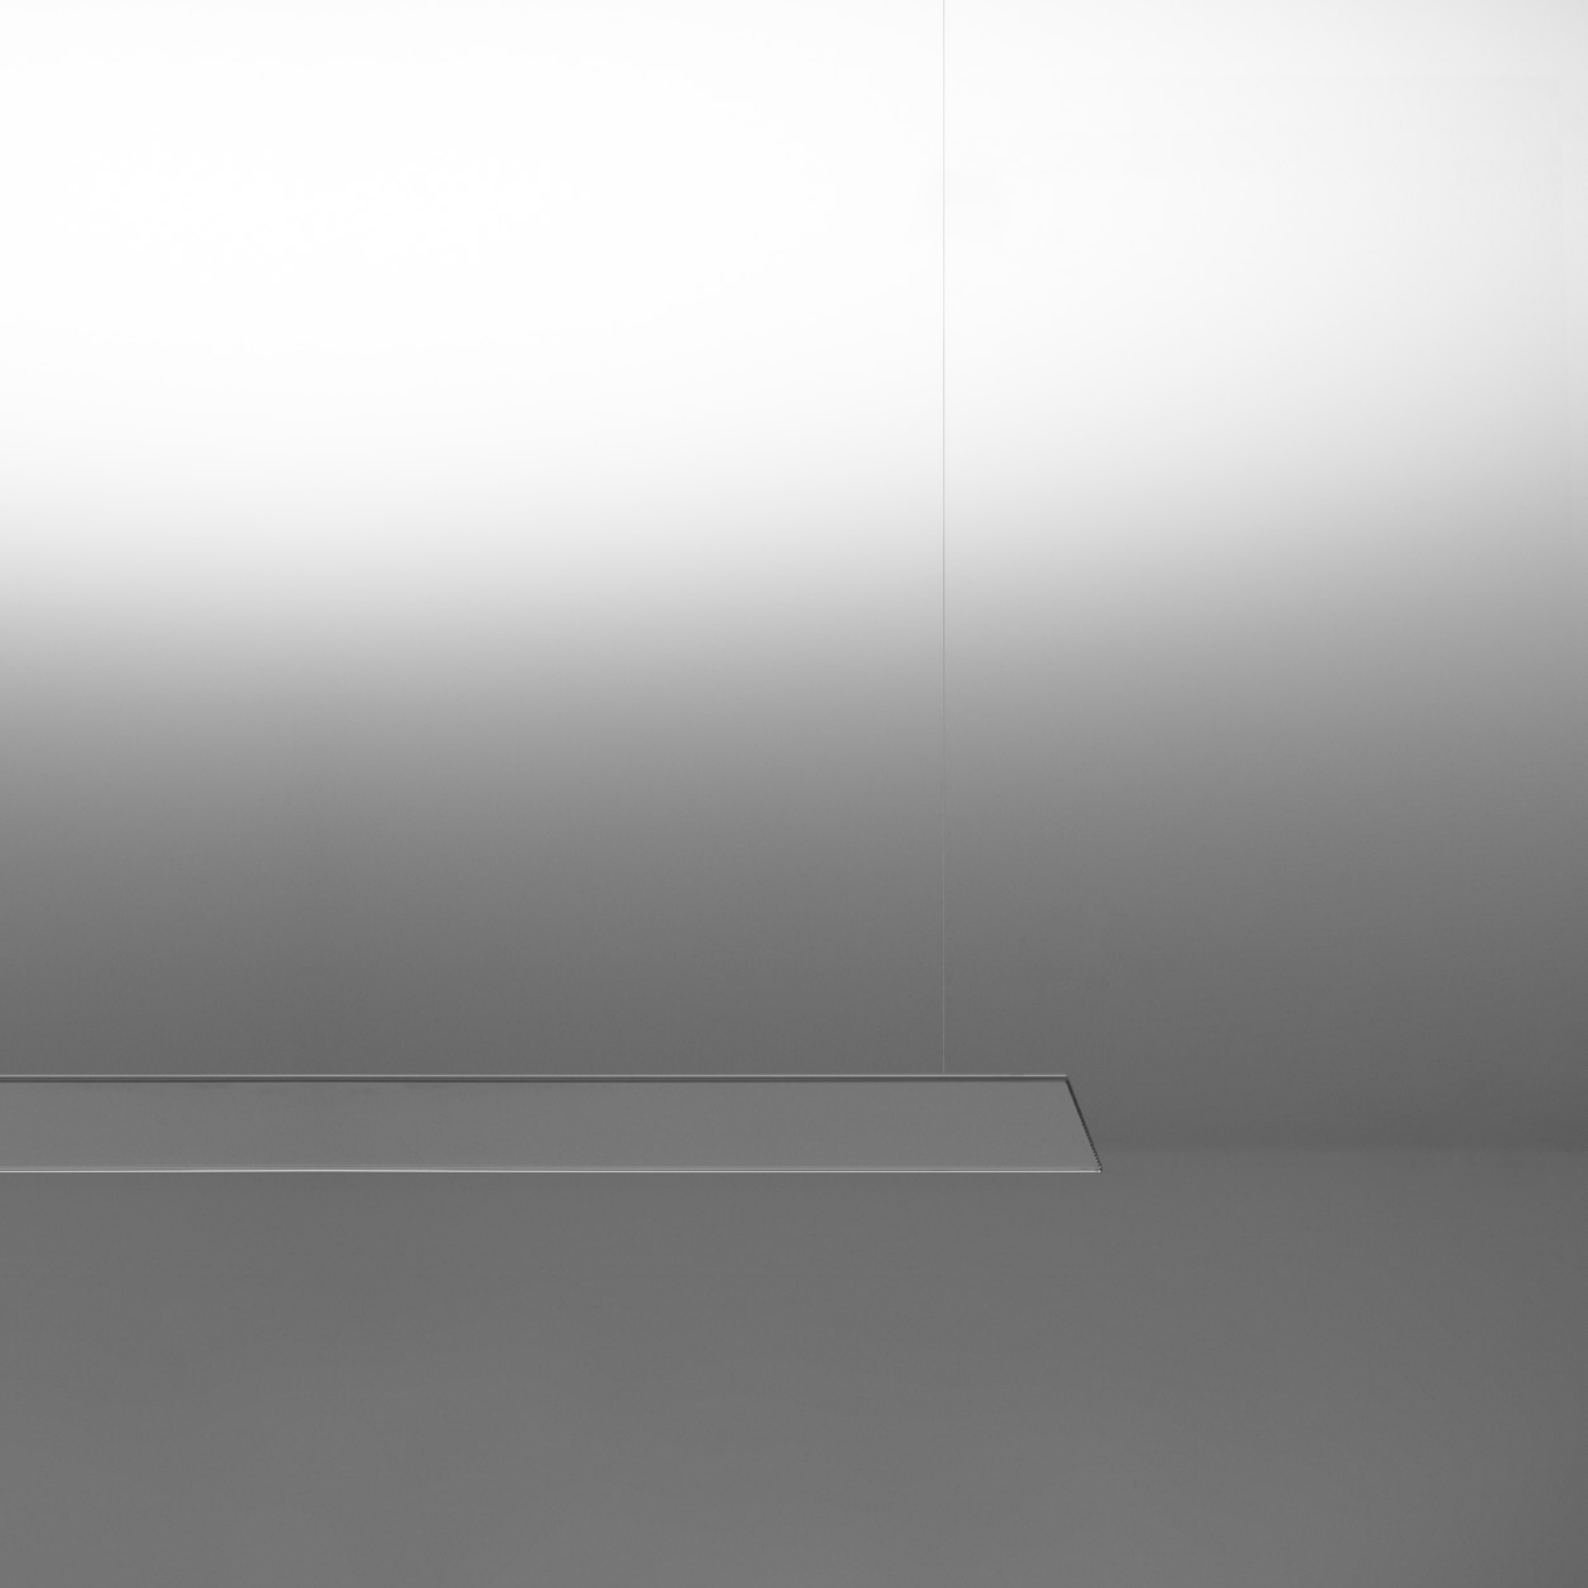

Suspension luminaire with indirect light for indoor use.	A powerful LED, a thin mirror. A magical, almost invisible luminaire for a light that multiplies spaces and offers unique perspectives, sudden depths and light illusions to the eye. Also available in the wall version. This luminaire can also be powered by ENDLESS conductive tape.	The roses available are in textured matt black or matt white painted steel. The back of the mirror is painted in matt black. REFLEX S is also available in the wall version.	The light source is LED with integrated module. The electric cable is coaxial and matt black. A range of roses and power supplies are available.
Apparecchio di illuminazione a sospensione, a luce indiretta, per interni.	Un LED potente, uno specchio sottile. Un apparecchio magico e quasi invisibile per una luce che moltiplica gli spazi e regala allo sguardo prospettive inedite, profondità impreviste, illusioni di luce. Disponibile anche nella versione da parete. Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.	I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. Il retro dello specchio è verniciato nero opaco. REFLEX S è disponibile anche in versione da parete.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è coassiale e di colore nero opaco. Sono disponibili vari rosoni e sistemi di alimentazione.



REFLEX S

50W

Max 1400mA DC

2700K - 6136lm / 3000K - 6326lm

CRI >90


Driver not included



Matt Black - 2700K	1A4790400.27.20
Matt Black - 3000K	1A4790400.30.20

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore			Not included
Matt White	Input 110-240V - 50/60Hz Output 1400mA DC - Max 50W IP20 - DALI - PUSH - 1-10V	1X0240300.02.07	
Matt Black	Input 110-240V - 50/60Hz Output 1400mA DC - Max 50W IP20 - DALI - PUSH - 1-10V	1X0240400.02.07	
Matt White	Input 220-240V - 50/60Hz Output 1400mA DC - Max 50W IP20 - TRIAC/IGBT	1X0240300.01.02	
Matt Black	Input 220-240V - 50/60Hz Output 1400mA DC - Max 50W IP20 - TRIAC/IGBT	1X0240400.01.02	




Ceiling rose without driver / Rosone senza alimentatore			Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00	
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00	
Matt White	For electrical cables - 1 Piece	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00	

Compulsory accessories / Accessori obbligatori




Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.03.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.03.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.04.00	

Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V(110-120V)	1400mA/55W(40W)/IP20/DALI - PUSH - 1-10V	1Z0240830.1400	



Driver / Alimentatore			Not included
220-240V	1400mA/50W/IP20/TRIAC - PUSH	1Z0241370.1400	

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione




Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato			Not included
Nickel plated - 1 Piece	Use only with Ceiling rose with driver 1X024	1A0510000.00.00	



Suspension luminaire powered by rechargeable battery with direct light for indoor use.	Light where you want it. QuiQuoQua takes suspension light where it is needed, without the limitation of electric cables.	The rose is in matt white painted aluminium. The dish is in textured matt white painted steel. The spotlight is in textured matt black painted aluminium. The spotlight is fixed magnetically to the dish. The suspension cable is in AISI 304 stainless steel.	The light source is LED with integrated module. The battery life is approx. 8 hours. The charger socket is located in the lower side of the spotlight. The switch is located on the lower side of the spotlight. QuiQuoQua does not have a dimmer function. The power supply is plug-in and is included.
Apparecchio di illuminazione a sospensione, alimentato da una batteria ricaricabile, a luce diretta, per interni.	La luce dove vuoi. QuiQuoQua offre la possibilità di portare la luce a sospensione dove si desidera senza il vincolo del cavo elettrico.	Il rosone è in alluminio verniciato bianco opaco. La parabola è in acciaio verniciata bianco opaco texturizzato. Il proiettore è in alluminio verniciato nero opaco texturizzato. Il proiettore è applicato magneticamente alla parabola. Il cavo di sospensione è in AISI 304.	La sorgente luminosa è a LED e a modulo integrato. L'autonomia della batteria è di circa 8 ore. La presa di ricarica è posizionata nella parte inferiore del proiettore. L'interruttore è posizionato nella parte inferiore del proiettore. QuiQuoQua non è dimmerabile. L'alimentatore è a spina ed è incluso.

Finish	.03 Matt White
	 Custom finish available on request. Finitura personalizzata su richiesta.




QuiQuoQua
5W
3000K - 345lm
CRI >80
Driver with plug included
ON/OFF
CE IP20

Matt White - 3000K - ON/OFF	1A2630300.30.00
-----------------------------	-----------------


Optional accessories / Accessori opzionali

Drivers / Alimentatori




Driver with plug / Alimentatore con spina		Included
Matt Black	Input 110-240V - 50/60Hz Output 9V DC - 3A - 30W - IP20	1Z1120710

LED modules / Moduli LED




LED module / Modulo LED		Included
Matt Black	5W - 3000K - 345lm - CRI >80 Rechargeable lithium battery 9V DC Li-Ion 5800mAh - Battery life 8 hours	1A0570400.30.00

Suspension kits / Kit di sospensione




Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato		Not included
Nickel plated - 1 Piece		1A0510000.00.00





Suspension luminaire with direct light for indoor use.	taO is a suspended black body, free to exist wherever you wish. Challenging gravity, it seems to float, deconstructing the visual balance of its weight. The thin power cable becomes a graphic feature that crosses space lightly, an instrument that becomes an idea.	The roses available are in textured matt black or matt white painted steel. The spotlight is in textured matt black painted aluminium. The suspension cable is in AISI 304 stainless steel. A range of light control accessories is available.	The light source is LED with integrated module. The electric cable is coaxial and matt black. A range of roses and power supplies are available.
Apparecchio di illuminazione a sospensione, a luce diretta, per interni.	taO è un corpo nero sospeso, libero di esistere dove lo si desidera. Sfida la gravità, sembra galleggiare e scompone l'equilibrio visivo della massa. Il suo sottile cavo di alimentazione diventa un segno grafico che attraversa lo spazio con leggerezza e da strumento si trasforma in idea.	I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato. Il proiettore è in alluminio verniciato nero opaco texturizzato. Il cavo di sospensione è in AISI 304. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è coassiale e di colore nero opaco. Sono disponibili vari rosoni e sistemi di alimentazione.


Finish	.04 Matt Black
	 Custom finish available on request. Finitura personalizzata su richiesta.

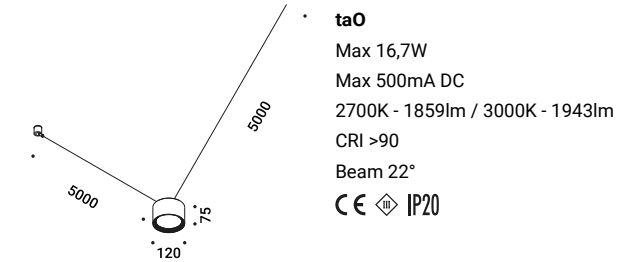

taO	Matt Black - 2700K	1A6110400.27.20
Max 16,7W	Matt Black - 3000K	1A6110400.30.20
Max 500mA DC		
2700K - 1859lm / 3000K - 1943lm		
CRI >90		
Beam 22°		
CE IP20		

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione



Wall/ceiling rose with driver / Rosone da parete/soffitto con alimentatore			Not included
Matt White	Input 110-240V - 50/60Hz Output 500mA DC - Max 16,7W IP20 - DALI - PUSH - 1-10V	1X0180300.05.07	
Matt Black	Input 110-240V - 50/60Hz Output 500mA DC - Max 16,7W IP20 - DALI - PUSH - 1-10V	1X0180400.05.07	
Matt White	Input 220-240V - 50/60Hz Output 500mA DC - Max 16,7W IP20 - TRIAC/IGBT	1X0180300.04.02	
Matt Black	Input 220-240V - 50/60Hz Output 500mA DC - Max 16,7W IP20 - TRIAC/IGBT	1X0180400.04.02	




Ceiling rose without driver / Rosone senza alimentatore			Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00	




Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.04.00	

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500



Driver / Alimentatore		Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500

Optional accessories / Accessori opzionali

Other accessories / Altri accessori




Soft filter / Filtro soft		Not included
Standard		1X0190000.03.00



Louvre 1 / Frangiluce 1		Not included
Matt Black		1X0190400.10.00



Louvre 2 / Frangiluce 2		Not included
Matt Black		1X0190400.11.00



Parabola		Not included
Matt Black		1X0190400.08.00



Snoot		Not included
Matt Black		1X0190400.09.00



Louvre 3 / Frangiluce 3		Not included
Matt Black	For Parabola - Snoot	1X0190400.12.00



Louvre 4 / Frangiluce 4		Not included
Matt Black	For Parabola - Snoot	1X0190400.13.00

FLOOR / TERRA



Floor luminaire with direct light for indoor use.

An authentic ready-made. Obtained from a flexible fishing rod, it is a delicate and elegant sign, which brings to mind the subtle branches of a willow tree or bamboo canes floating on a light breeze.

The base is in painted steel and is available in a range of finishes. The stem is in painted fibreglass in a range of finishes. The joint on the base is in polished AISI 316L stainless steel. SAMPEI is available in four different heights and also in the outdoor version. A range of light control accessories is available.

The light source is LED with integrated module. The electric cable is in matt white or matt black, depending on the luminaire finish. The switch / dimmer is fitted on the cable. The power supply is plug-in and is included.

Apparecchio di illuminazione da terra, a luce diretta, per interni.

Un autentico ready-made. Ricavata da una canna da pesca flessibile, è un segno delicato ed elegante, che fa pensare ad effimeri rami di salice, a canne di bambù mosse da un debole vento.

La base è in acciaio verniciata in varie finiture. Lo stelo è in fibra di vetro verniciato in varie finiture. Lo snodo alla base è in AISI 316L lucido. SAMPEI è disponibile in quattro altezze differenti e anche in versione outdoor. Sono disponibili diversi accessori per il controllo della luce.


La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore bianco opaco o nero opaco in funzione della finitura. L'interruttore / dimmer è lungo il cavo. L'alimentatore è a spina ed è incluso.

Compasso d'Oro ADI
Award 2014



Finish	.03	Matt White	.04	Matt Black
	.20	Magic Blue	.37	Copper Brown
	.41	Umbra Grey		


 Custom finish available on request.
Finitura personalizzata su richiesta.



SAMPEI 230
Max 21W
100-240V - 50/60Hz
2700K - 1795lm / 3000K - 1890lm
CRI >90
Driver with plug included
Dimmer on board

CE IP20


Matt White - 2700K - Dimmer on board	1A3730300.27.06
Matt White - 3000K - Dimmer on board	1A3730300.30.06
Matt Black - 2700K - Dimmer on board	1A3730400.27.06
Matt Black - 3000K - Dimmer on board	1A3730400.30.06
Magic Blue - 2700K - Dimmer on board	1A3732000.27.06
Magic Blue - 3000K - Dimmer on board	1A3732000.30.06
Copper Brown - 2700K - Dimmer on board	1A3733700.27.06
Copper Brown - 3000K - Dimmer on board	1A3733700.30.06
Umbra Grey - 2700K - Dimmer on board	1A3734100.27.06
Umbra Grey - 3000K - Dimmer on board	1A3734100.30.06



SAMPEI 260
Max 21W
100-240V - 50/60Hz
2700K - 1795lm / 3000K - 1890lm
CRI >90
Driver with plug included
Dimmer on board

CE IP20


Matt White - 2700K - Dimmer on board	1A3740300.27.06
Matt White - 3000K - Dimmer on board	1A3740300.30.06
Matt Black - 2700K - Dimmer on board	1A3740400.27.06
Matt Black - 3000K - Dimmer on board	1A3740400.30.06
Magic Blue - 2700K - Dimmer on board	1A3742000.27.06
Magic Blue - 3000K - Dimmer on board	1A3742000.30.06
Copper Brown - 2700K - Dimmer on board	1A3743700.27.06
Copper Brown - 3000K - Dimmer on board	1A3743700.30.06
Umbra Grey - 2700K - Dimmer on board	1A3744100.27.06
Umbra Grey - 3000K - Dimmer on board	1A3744100.30.06



SAMPEI 290
Max 21W
100-240V - 50/60Hz
2700K - 1795lm / 3000K - 1890lm
CRI >90
Driver with plug included
Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board	1A3750300.27.06
Matt White - 3000K - Dimmer on board	1A3750300.30.06
Matt Black - 2700K - Dimmer on board	1A3750400.27.06
Matt Black - 3000K - Dimmer on board	1A3750400.30.06
Magic Blue - 2700K - Dimmer on board	1A3752000.27.06
Magic Blue - 3000K - Dimmer on board	1A3752000.30.06
Copper Brown - 2700K - Dimmer on board	1A3753700.27.06
Copper Brown - 3000K - Dimmer on board	1A3753700.30.06
Umbra Grey - 2700K - Dimmer on board	1A3754100.27.06
Umbra Grey - 3000K - Dimmer on board	1A3754100.30.06



SAMPEI 440
Max 21W
100-240V - 50/60Hz
2700K - 1859lm / 3000K - 1943lm
CRI >90
Driver with plug included
Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board	1A3760300.27.06
Matt White - 3000K - Dimmer on board	1A3760300.30.06
Matt Black - 2700K - Dimmer on board	1A3760400.27.06
Matt Black - 3000K - Dimmer on board	1A3760400.30.06
Magic Blue - 2700K - Dimmer on board	1A3762000.27.06
Magic Blue - 3000K - Dimmer on board	1A3762000.30.06
Copper Brown - 2700K - Dimmer on board	1A3763700.27.06
Copper Brown - 3000K - Dimmer on board	1A3763700.30.06
Umbra Grey - 2700K - Dimmer on board	1A3764100.27.06
Umbra Grey - 3000K - Dimmer on board	1A3764100.30.06

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Soft filter / Filtro soft	Not included
Standard	1X0190000.03.00



Louvre 1 / Frangiluce 1	Not included
Matt Black	1X0190400.10.00



Louvre 2 / Frangiluce 2	Not included
Matt Black	1X0190400.11.00



Floor luminaire with indirect light for indoor use.

The ideal solution for lighting paintings or adding depth to spaces, powered by a normal electrical socket.

The base is in matt white, matt black painted or natural brass.
The rose is in matt white painted aluminium.
The body is in matt white, matt black painted or natural brass.
The suspension cable is in AISI 304 stainless steel.
The luminaire is height-adjustable and adjustable along the vertical axis.

The light source is LED with integrated module.
The vertical electric cable is coaxial and transparent.
The electric floor cable is transparent.
The switch / dimmer is fitted on the cable.
The power supply is plug-in and is included.

Apparecchio di illuminazione da terra, a luce indiretta, per interni.

Una soluzione per illuminare i quadri, o dare profondità agli spazi, prendendo corrente da una normale presa elettrica.


La base è in ottone verniciata bianco opaco, nero opaco o lasciato naturale.
Il rosone è in alluminio verniciato bianco opaco.
Il corpo è in ottone verniciato bianco opaco, nero opaco o lasciato naturale.
Il cavo di sospensione è in AISI 304.
L'apparecchio è regolabile in altezza e orientabile lungo il suo asse verticale.

La sorgente luminosa è a LED e a modulo integrato.
Il cavo elettrico verticale è coassiale e trasparente.
Il cavo elettrico a terra è trasparente.
L'interruttore / dimmer è lungo il cavo.
L'alimentatore è a spina ed è incluso.

Finish

.03	Matt White	.04	Matt Black
.08	Brushed Brass		

 Custom finish available on request.
Finitura personalizzata su richiesta.




MASAI 1

Driver with plug version
15,5W
100-240V - 50/60Hz
2700K - 600lm / 3000K - 619lm
CRI >90
Driver with plug included
Dimmer on board



Matt White - 2700K - Dimmer on board	1A2720300.27.06
Matt White - 3000K - Dimmer on board	1A2720300.30.06
Matt Black - 2700K - Dimmer on board	1A2720400.27.06
Matt Black - 3000K - Dimmer on board	1A2720400.30.06
Brushed Brass - 2700K - Dimmer on board	1A2720800.27.06
Brushed Brass - 3000K - Dimmer on board	1A2720800.30.06



MASAI 2


Remote driver version
13W
24V DC
2700K - 600lm / 3000K - 619lm
CRI >90
Driver not included




Matt White - 2700K	1A2720300.27.20
Matt White - 3000K	1A2720300.30.20
Matt Black - 2700K	1A2720400.27.20
Matt Black - 3000K	1A2720400.30.20
Brushed Brass - 2700K	1A2720800.27.20
Brushed Brass - 3000K	1A2720800.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore				Not included
220-240V	24V/20W/IP20/TRIAC/IGBT	MASAI 1	1Z0240850.24	




Driver / Alimentatore				Not included
220-240V(110-127V)	24V/22W(13,5W)/IP20/DALI - PUSH - 1-10V	MASAI 2	1Z0241270.24	

Optional accessories / Accessori opzionali


Suspension kits / Kit di sospensione



Ceiling rose without driver / Rosone senza alimentatore			Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00	
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00	



Recessed rose without driver / Rosone da incasso senza alimentatore			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.03.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.03.00	



Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato			Not included
	Nickel plated - 1 Piece	1A0510000.00.00	




304 Stainless steel suspension cable / Cavo di sospensione in acciaio inox AISI 304			Not included
	Lenght 10 m	1A1680000.00.00	




Floor luminaire with indirect light for indoor use.	From the Latin "origo", start, birth, source. It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner. Mysterious and enigmatic, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light.	The base is in textured matt black painted steel. The stem is in matt black fibreglass. ORIGINE is available in three different heights and also in the outdoor version.	The light source is LED with integrated module. The electric cable is matt black. The switch / dimmer is fitted on the cable. The power supply is plug-in and is included.
Apparecchio di illuminazione da terra, a luce indiretta, per interni.	Dal latino "origo", inizio, nascita, fonte. Evoca un germoglio che emerge dalla terra e si slancia verso il cielo, lo stelo che diventa sempre più sottile. Misteriosa ed enigmatica, unisce il fascino dell'incognito al piacere di una luce d'ambiente sofisticata ed elegante.	La base è in acciaio verniciata nero opaco texturizzato. Lo stelo è in fibra di vetro nero opaco. ORIGINE è disponibile in tre altezze differenti e anche in versione outdoor.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco. L'interruttore / dimmer è lungo il cavo. L'alimentatore è a spina ed è incluso.

Finish	.04 Matt Black
	 Custom finish available on request. Finitura personalizzata su richiesta.




ORIGINE 290
27W
100-240V - 50/60Hz
2700K - 2595lm / 3000K - 2882lm
CRI >80
Driver with plug included
Dimmer on board
C E IP20

Matt Black - 2700K - Dimmer on board	1A2300400.27.06
Matt Black - 3000K - Dimmer on board	1A2300400.30.06



ORIGINE 390
33W
100-240V - 50/60Hz
2700K - 3633lm / 3000K - 4035lm
CRI >80
Driver with plug included
Dimmer on board
C E IP20

Matt Black - 2700K - Dimmer on board	1A2310400.27.06
Matt Black - 3000K - Dimmer on board	1A2310400.30.06



ORIGINE 490
41W
100-240V - 50/60Hz
2700K - 4671lm / 3000K - 5188lm
CRI >80
Driver with plug included
Dimmer on board
C E IP20

Matt Black - 2700K - Dimmer on board	1A2320400.27.06
Matt Black - 3000K - Dimmer on board	1A2320400.30.06





Floor luminaire with direct light for indoor use.

Apparecchio di illuminazione da terra, a luce diretta, per interni.

Floor lamp designed to create pure and flexible accent light. Its principle component is the pivot point between two "chopsticks" (Hashi) that serve as light sources which, positioned in different ways, create a strong, graphic effect in space.

Lampada da terra pensata per portare la luce d'accento con purezza e flessibilità. La componente fondamentale di progetto è lo snodo che, grazie alla sua energica tenacia, permette di posizionare le "bacchette" (Hashi) nello spazio in modo grafico e deciso.

The stems are in brushed matt gold or brushed matt black anodised aluminium. The base is in textured matt black painted steel. HASHI is adjustable in one direction.

Gli steli sono in alluminio anodizzati nero opaco spazzolato o oro opaco spazzolato. La base è in acciaio verniciata nero opaco texturizzato. HASHI è orientabile in una direzione.

The light source is LED with integrated module. The electric cable is matt black. The switch / dimmer is fitted on the cable. The power supply is plug-in and is included.

La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco. L'interruttore / dimmer è lungo il cavo. L'alimentatore è a spina ed è incluso.


Finish

.04 Matt Black

.18 Matt Gold



Custom finish available on request.
Finitura personalizzata su richiesta.



HASHI
15,5W
100-240V - 50/60Hz
2700K - 765lm / 3000K - 823lm
CRI >90
UGR <19
Driver with plug included
Dimmer on board
CE IP20


Matt Black - 2700K - Dimmer on board	1A2510400.27.06
Matt Black - 3000K - Dimmer on board	1A2510400.30.06
Matt Gold - 2700K - Dimmer on board	1A2511800.27.06
Matt Gold - 3000K - Dimmer on board	1A2511800.30.06





Floor luminaire with diffuse light for indoor use.	A lantern. Soft and diffuse light. A slow-light project.	The structure is in AISI 304 stainless steel and matt black anodised aluminium. The shade is in nylon and handstitched. SHOJI is also available in the outdoor version.	It requires an E27 LED bulb, which is not included but is available as an accessory. The electric cable is matt black. The switch / dimmer is fitted on the cable.
Apparecchio di illuminazione da terra, a luce diffusa, per interni.	Una lanterna, luce morbida e diffusa. Un progetto di slow-light.	La struttura è in AISI 304 e alluminio anodizzato nero opaco. Il paralume è in nylon e cucito a mano. SHOJI è disponibile anche in versione outdoor.	La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio. Il cavo elettrico è di colore nero opaco. L'interruttore / dimmer è lungo il cavo.

Finish	.00	Standard
--------	-----	----------



SHOJI
Max 18W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
C E IP20

Standard - Dimmer on board	1A2780000.00.06
----------------------------	-----------------

Optional accessories / Accessori opzionali

Bulbs / Lampadine




LED - E27 - A60		Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790	





Floor luminaire with diffuse light for indoor use.	The light is elevated to a work of art and contemplation. A luminous panel without a frame leans against the wall as if waiting to be hung.	The structure is in matt white painted aluminium. The panel is in matt white methacrylate.	The light source is RGB LED with integrated module. The electric cable is transparent. The driver is integrated, with a dimmer function. The luminaire is switch on and off and the brightness and colour controlled by a remote control.
Apparecchio di illuminazione da terra, a luce diffusa, per interni.	La luce è elevata a oggetto d'arte e di contemplazione. Un pannello luminoso senza cornice è appoggiato alla parete come se aspettasse di essere appeso.	La struttura è in alluminio verniciato bianco opaco. Il pannello è in metacrilato bianco opaco.	La sorgente luminosa è a LED RGB e a modulo integrato. Il cavo elettrico è trasparente. Il driver è integrato e dimmerabile. L'accensione, lo spegnimento e la regolazione dell'intensità luminosa e del colore avviene mediante un telecomando.

Finish	.00	Standard
--------	-----	----------



PABLO
60W
220-240V - 50/60Hz
Driver integrated
Dimmer on board
RGB wireless control
CE IP20


Standard - RGB - Dimmer on board	1A2730000.99.06
----------------------------------	-----------------






Floor luminaire with indirect light for indoor use.	A base, a stem, a head, STOP. A circle in space, an ideographic project in which idea becomes form and function.	The base is in textured matt black painted steel. The stem is in polished gold or polished chrome galvanised brass. The head is in textured matt black painted aluminium and is adjustable in one direction.	The light source is LED with integrated module. The electric cable is matt black. The switch / dimmer is fitted on the cable. The power supply is plug-in and is included.
Apparecchio di illuminazione da terra, a luce indiretta, per interni.	Una base, uno stelo, una testa, STOP. Un cerchio nello spazio, un progetto ideografico in cui l'idea diventa forma e funzione.	La base è in acciaio verniciata nero opaco texturizzato. Lo stelo è in ottone galvanizzato cromo lucido o oro lucido. La testa è in alluminio verniciata nero opaco texturizzato e orientabile in una direzione.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco. L'interruttore / dimmer è lungo il cavo. L'alimentatore è a spina ed è incluso.

Finish	.01 Polished Chrome	.19 Polished Gold
	 Custom finish available on request. Finitura personalizzata su richiesta.	



STOP
28W
100-240V - 50/60Hz
2700K - 2741lm / 3000K - 2877lm
CRI >90
Driver with plug included
Dimmer on board
CE □ IP20


Polished Chrome - 2700K - Dimmer on board	1A4760100.27.06
Polished Chrome - 3000K - Dimmer on board	1A4760100.30.06
Polished Gold - 2700K - Dimmer on board	1A4761900.27.06
Polished Gold - 3000K - Dimmer on board	1A4761900.30.06

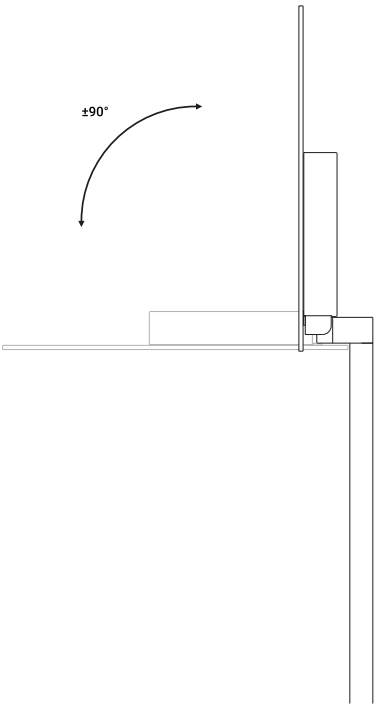




Floor luminaire with indirect light for indoor use.	BANNER is one of our most versatile solutions, designed to bring the light where it is needed.	The structure is in matt white painted steel. The luminaire rests on the ground and is fixed to the wall with a bracket.	The source is LED, with an integrated module. The electric cable is matt white. The driver is integrated, with a dimmer function. The ON/OFF and brightness control button is located on the rear of the luminaire, which can also be controlled by the DALI system.
Apparecchio di illuminazione da terra, a luce indiretta, per interni.	BANNER è una delle nostre soluzioni più versatili, pensata per portare la luce dove si desidera.	La struttura è in acciaio verniciato bianco opaco. L'apparecchio è appoggiato a terra e fissato a parete mediante una staffa.	La sorgente è a LED e a modulo integrato. Il cavo elettrico è di colore bianco opaco. Il driver è integrato e dimmerabile. Il controllo dell'accensione e dell'intensità luminosa può avvenire mediante un pulsante posizionato sul retro dell'apparecchio oppure mediante sistema DALI.

Finish	.03 Matt White
	 Custom finish available on request. Finitura personalizzata su richiesta.



BANNER
90W
110-240V - 50/60Hz
2700K - 11083lm / 3000K - 11918lm
CRI >80
Driver integrated
DALI
C E IP20

Matt White - 2700K - DALI	1A1840300.27.01
Matt White - 3000K - DALI	1A1840300.30.01



BANNER
90W
110-240V - 50/60Hz
2700K - 11083lm / 3000K - 11918lm
CRI >80
Driver integrated
Dimmer on board
C E IP20


Matt White - 2700K - Dimmer on board	1A1840300.27.06
Matt White - 3000K - Dimmer on board	1A1840300.30.06





Floor luminaire with indirect light for indoor use.	A piece of architecture to be used in space.	The body is in concrete. The diffuser glass is sanded. Q is also available in the outdoor version.	It requires an GU10 LED bulb, which is not included but is available as an accessory. The electric cable is matt orange. The switch is fitted on the cable.
Apparecchio di illuminazione da terra, a luce indiretta, per interni.	Un pezzo di architettura da utilizzare nello spazio.	Il corpo è in calcestruzzo. Il vetro diffusore è sabbiato. Q è disponibile anche in versione outdoor.	La lampadina prevista è a LED, con attacco GU10, e non è inclusa, ma disponibile come accessorio. Il cavo elettrico è di colore arancione opaco. L'interruttore è disposto lungo il cavo.

Finish	.00	Standard
--------	-----	----------



Q
Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Standard - ON/OFF	1A2760000.00.00
-------------------	-----------------

Optional accessories / Accessori opzionali

Bulbs / Lampadine




LED - GU10 - PAR16		Not included
220-240V - 4,9W - 120° 3000K - 550lm - CRI >80 Energy Efficiency E	1Y0330740	





Floor luminaire with indirect light for indoor use.	To play with the colours of light. To feel the light and to live it in all its spectrum.	The base is in matt black or matt white painted steel, depending on the finish. The structure is in matt white painted steel or brushed matt black electro-coloured stainless steel.	The light source is RGB LED with integrated module. The electric cable is in matt black. The luminaire is switch on and off and the brightness and colour controlled by a remote control.
Apparecchio di illuminazione da terra, a luce indiretta, per interni.	Per giocare con i colori della luce. Per sentire la luce e viverla in tutto il suo spettro.	La base è in acciaio verniciata bianco opaco o nero opaco in funzione della finitura. La struttura è in acciaio verniciato bianco opaco o in acciaio inossidabile elettrocolorato nero opaco spazzolato.	La sorgente luminosa è a LED RGB e a modulo integrato. Il cavo elettrico è di colore nero opaco. L'accensione, lo spegnimento e la regolazione dell'intensità luminosa e del colore avviene mediante un telecomando.

Finish	.03 Matt White	.13 Black Brushed Stainless Steel
	 Custom finish available on request. Finitura personalizzata su richiesta.	



MOVIE
80W
100-240V - 50/60Hz
2832lm
CRI >90
Driver integrated
Dimmer on board
RGBW wireless control
CE □ IP20

Matt White - RGBW - Dimmer on board	1A2740300.98.06
Black Brushed Stainless Steel - RGBW - Dimmer on board	1A2741300.98.06





Davide Groppi / 2023

MOON F

Floor luminaire with diffuse light for indoor use.

Apparecchio di illuminazione da terra, a luce diffusa, per interni.

MOON was created from the dream of bringing the moon inside your own home. The unryu kozo paper surface makes every lamp unique.

MOON nasce da un sogno, quello di portare la luna dentro casa. La superficie di carta unryu kozo, fatta a mano, rende unico ogni pezzo.

The base is in matt white painted steel. The diffuser is in polypropylene and is hand-coated with unryu kozo paper.


La base è in acciaio verniciata bianco opaco. Il diffusore è in polipropilene rivestito a mano con carta unryu kozo.

It requires an E27 LED bulb, which is not included but is available as an accessory. The electric cable is in matt white. The switch / dimmer is fitted on the cable.

La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio. Il cavo elettrico è di colore bianco opaco. L'interruttore / dimmer è disposto lungo il cavo.


Finish

.00 Standard



MOON 80 F
Max 15W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE IP20

Standard - Dimmer on board	1A4880000.00.06
----------------------------	-----------------



MOON 120 F
Max 2x25W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE IP20

Standard - Dimmer on board	1A4890000.00.06
----------------------------	-----------------

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - E27 - A60			Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 80 F	1Y0330790



LED - E27 - A150			Not included
	220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120 F	1Y2160020

Optional accessories / Accessori opzionali

Other accessories / Altri accessori

Moisture barrier bag / Sacco barriera			Not included
	Packaging for air and sea shipping	MOON 80 F	4A2840010

Moisture barrier bag / Sacco barriera			Not included
	Packaging for air and sea shipping	MOON 120 F	49860020

Wooden crate / Cassa in legno			Not included
	Packaging for air and sea shipping	MOON 120 F	49860010




Floor luminaire with indirect light for indoor use.	The starting point? A luminous mark that appears and defines the space. A mobile lamp that evokes the suspension between light and shadow. A special optical system creates a perfect circle of light on the ceiling.	The body is in textured matt black painted steel. The luminaire is adjustable in all directions. Nine filters are included to change the colour temperature. Three coloured filter accessories (red, yellow and blue) are available.	The light source is LED with integrated module. The electric cable is matt black. The switch / dimmer is fitted on the cable. The power supply is plug-in and is included.
Apparecchio di illuminazione da terra, a luce indiretta, per interni.	Il punto di partenza? Un segno luminoso che appare e definisce lo spazio. Una lampada mobile capace di evocare la sospensione tra la luce e l'ombra. Uno speciale sistema ottico permette la perfetta messa a fuoco di un cerchio di luce sul soffitto.	Il corpo è in acciaio verniciato nero opaco texturizzato. L'apparecchio è orientabile in tutte le direzioni. Sono inclusi nove filtri per modificare la temperatura colore. Sono disponibili, come accessori, tre filtri colorati (rosso, giallo e blu).	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco. L'interruttore / dimmer è lungo il cavo. L'alimentatore è a spina ed è incluso.

Finish

.27 Gravity Black



Custom finish available on request.
Finitura personalizzata su richiesta.



OneOff
12W
100-240V - 50/60Hz
5000K - 380lm
CRI >80
Driver with plug included
Dimmer on board
C E IP20

Gravity Black - 5000K - Dimmer on board	1A5642700.50.06
---	-----------------

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Red dichroic filter / Filtro dicroico rosso	Not included
1X0210000.01.00	



Yellow dichroic filter / Filtro dicroico giallo	Not included
1X0210000.02.00	




Blue dichroic filter / Filtro dicroico blu	Not included
1X0210000.03.00	





Floor or table luminaire with direct light for indoor use.	Light that stays by your side. A tilting stem supports a small, adjustable spotlight that precisely directs the light. An object that can be moved naturally, becoming a floor or table lamp.	The base is in textured matt black painted steel. The stem is in sanded or natural sanded matt black anodised aluminium and can be tilted along the vertical axis. The joint on the base is in sanded matt black anodised aluminium. The spotlight is in sanded matt black anodised aluminium and is adjustable in all directions.	The light source is LED with integrated module. The electric cable is matt black. The switch / dimmer is fitted on the cable. The power supply is plug-in and is included.
Apparecchio di illuminazione da terra o da tavolo, a luce diretta, per interni.	La luce che ti sta accanto. Uno stelo inclinabile sostiene un piccolo proiettore orientabile che dirige la luce con precisione. Un oggetto che si sposta con naturalezza e diventa lampada da terra o lampada da tavolo.	La base è in acciaio verniciata nero opaco texturizzato. Lo stelo è in alluminio anodizzato nero opaco sabbato o naturale sabbato ed è inclinabile lungo il suo asse verticale. Lo snodo alla base è in alluminio anodizzato nero opaco sabbato. Il proiettore è in alluminio anodizzato nero opaco sabbato ed è orientabile in tutte le direzioni.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco. L'interruttore / dimmer è lungo il cavo. L'alimentatore è a spina ed è incluso.

Finish	.04 Matt Black	.44 Natural Aluminium
	 Custom finish available on request. Finitura personalizzata su richiesta.	



MIA
6W
100-240V - 50/60Hz
2700K - 250lm / 3000K - 258lm
CRI >90
Beam 25°
UGR <19
Driver with plug included
Dimmer on board
CE □ IP20


Matt Black - 2700K - Dimmer on board	1A5600400.27.06
Matt Black - 3000K - Dimmer on board	1A5600400.30.06
Natural Aluminium - 2700K - Dimmer on board	1A5604400.27.06
Natural Aluminium - 3000K - Dimmer on board	1A5604400.30.06





Floor luminaire with direct light for indoor use.	Space becomes a photography set. A place to be interpreted and transformed by light, with the same freedom and precision used to define a shot. A base, a stem and a spotlight.	The base is in textured matt black painted steel. The stem is in matt black painted steel. The spotlight is in textured matt black painted aluminium. The spotlight is adjustable in all directions and can be moved along the stem. A range of light control accessories is available.	The light source is LED with integrated module and is not included but is available as an accessory. The electric cable is matt black. The switch / dimmer is fitted on the cable. The power supply is plug-in and is included.
Apparecchio di illuminazione da terra, a luce diretta, per interni.	Lo spazio come set fotografico. Un luogo da interpretare e trasformare attraverso la luce, con la stessa libertà e precisione di chi modella un'inquadratura. Una base, uno stelo e un proiettore.	La base è in acciaio verniciata nero opaco texturizzato. Lo stelo è in acciaio verniciato nero opaco. Il proiettore è in alluminio verniciato nero opaco texturizzato. Il proiettore è orientabile in tutte le direzioni e traslabile lungo lo stelo. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato, non è inclusa, ma disponibile come accessorio. Il cavo elettrico è di colore nero opaco. L'interruttore / dimmer è lungo il cavo. L'alimentatore è a spina ed è incluso.

Finish	.04 Matt Black
---------------	--------------------------




SET
Max 21W
100-240V - 50/60Hz
Driver with plug included
Dimmer on board
LED module not included
CE IP20


Matt Black - Dimmer on board	1A6120400.00.06
------------------------------	-----------------

Compulsory accessories / Accessori obbligatori

LED modules / Moduli LED



DG111 LED module / Modulo LED DG111	Not included
16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20
16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20



DG111 LED module / Modulo LED DG111	Not included
16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20
16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Soft filter / Filtro soft	Not included
Standard	1X0190000.03.00




Louvre 1 / Frangiluce 1	Not included
Matt Black	1X0190400.10.00




Louvre 2 / Frangiluce 2	Not included
Matt Black	1X0190400.11.00

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Parabola	Not included
Matt Black	1X0190400.08.00




Snoot	Not included
Matt Black	1X0190400.09.00



Louvre 3 / Frangiluce 3	Not included
Matt Black For Parabola - Snoot	1X0190400.12.00



Louvre 4 / Frangiluce 4	Not included
Matt Black For Parabola - Snoot	1X0190400.13.00



Reflector Ø80 / Riflettore Ø80	Not included
Matt White	1X0190300.04.00

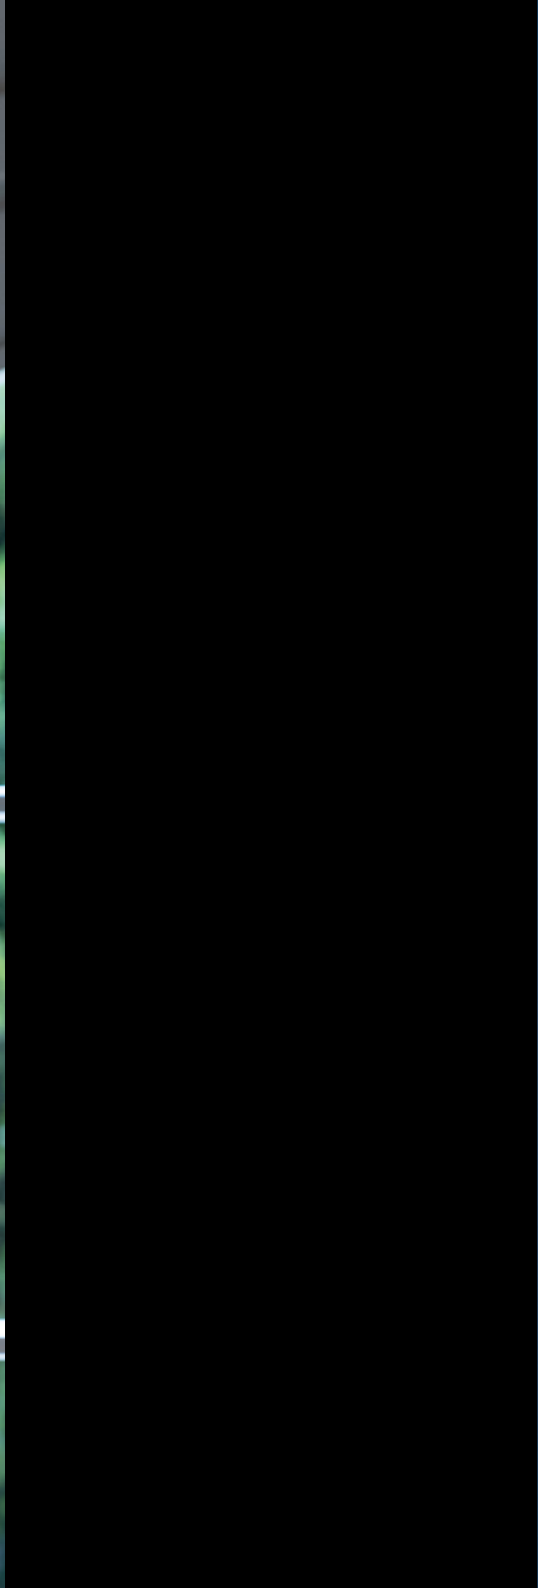


TABLE / TAVOLO



Table luminaire powered by rechargeable battery with direct light for indoor use.

A timeless icon with an eye on the future.
Portable and rechargeable, TeTaTeT is the greatest expression of freedom.
With TeTaTeT, every table becomes a meeting place, a complete dining experience.

The base is in matt painted steel in a range of finishes.
The stem and head are in matt painted ABS in a range of finishes.
The base fixing is magnetic.

The light source is LED with integrated module.
The battery life is approx. 12 hours.
The charger socket is fitted on the upper part of the stem.
The luminaire is switched on and off with the sensor on the head.
TeTaTeT does not have a dimmer function.
The power supply is plug-in and is included.

Apparecchio di illuminazione da tavolo, alimentato da una batteria ricaricabile, a luce diretta, per interni.

Un'icona senza tempo, con lo sguardo rivolto al futuro.
Portatile e ricaricabile, TeTaTeT è la massima espressione della libertà.
Grazie a TeTaTeT, ogni tavola diventa un luogo d'incontro, ogni cena un'emozione.

La base è in acciaio verniciata opaca in varie finiture.
Lo stelo e la testa sono in ABS verniciati opachi in varie finiture.
Il fissaggio alla base è magnetico.


La sorgente luminosa è a LED e a modulo integrato.
L'autonomia della batteria è di circa 12 ore.
La presa di ricarica è posizionata nella parte superiore dello stelo.
L'accensione e lo spegnimento è sensoriale agendo sulla testa.
TeTaTeT non è dimmerabile.
L'alimentatore è a spina ed è incluso.

Compasso d'Oro ADI
Mention of Honour
2016



Finish	.03	Matt White	.18	Matt Gold
	.27	Gravity Black	.30	Grey Blue
	.31	Black Red	.33	Black Green
	.35	Grey Green	.40	Grey Beige

 Custom finish available on request.
Finitura personalizzata su richiesta.




TeTaTeT

2W
2700K - 165lm / 3000K - 178lm
CRI >90
Driver with plug included
ON/OFF
CE IP20

Matt White - 2700K - ON/OFF	1A0310300.27.00
Matt White - 3000K - ON/OFF	1A0310300.30.00
Matt Gold - 2700K - ON/OFF	1A0311800.27.00
Matt Gold - 3000K - ON/OFF	1A0311800.30.00
Gravity Black - 2700K - ON/OFF	1A0312700.27.00
Gravity Black - 3000K - ON/OFF	1A0312700.30.00
Grey Blue - 2700K - ON/OFF	1A0313000.27.00
Grey Blue - 3000K - ON/OFF	1A0313000.30.00
Black Red - 2700K - ON/OFF	1A0313100.27.00
Black Red - 3000K - ON/OFF	1A0313100.30.00
Black Green - 2700K - ON/OFF	1A0313300.27.00
Black Green - 3000K - ON/OFF	1A0313300.30.00
Grey Green - 2700K - ON/OFF	1A0313500.27.00
Grey Green - 3000K - ON/OFF	1A0313500.30.00
Grey Beige - 2700K - ON/OFF	1A0314000.27.00
Grey Beige - 3000K - ON/OFF	1A0314000.30.00


Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Included
Matt Black	Input 110-240V - 50/60Hz Output 6V DC - 1A - 6W - IP20	1Z0000073

Other accessories / Altri accessori



Rechargeable battery / Batteria ricaricabile		Included
Matt White	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0430300.00.00
Matt Gold	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0431800.00.00
Gravity Black	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0432700.00.00
Grey Blue	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433000.00.00
Black Red	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433100.00.00
Black Green	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433300.00.00
Grey Green	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433500.00.00
Grey Beige	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0434000.00.00

Optional accessories / Accessori opzionali

Other accessories / Altri accessori





Table / Tavolino	Not included
Matt White	1A4020300.00.00
Matt Black	1A4020400.00.00



Floor or table luminaire with indirect light for indoor use.	A slender, light, ephemeral and abstract sculpture. A weightless ideogram.	The base is in matt black painted ABS with soft touch finish. The stem is in matt black fibreglass. The stem ends with a thin matt black painted steel ring.	The light source is LED with integrated module. The matt black USB-A/USB-C electric cable is 1 m long and is included. The power socket is fitted into the base. The luminaire is switched on and off and controlled by a sensor on the base. The power supply is plug-in and not included, but is available as an accessory.
Apparecchio di illuminazione da tavolo o da terra, a luce indiretta, per interni.	Scultura filiforme, leggera, effimera, astratta. Un ideogramma senza peso.	La base è in ABS verniciata nero opaco con finitura soft touch. Lo stelo è in fibra di vetro nero opaco. Lo stelo termina con un sottile anello d'acciaio verniciato nero opaco.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico USB-A/USB-C di colore nero opaco e 1 m di lunghezza è incluso. La presa di alimentazione è posizionata nello spessore della base. L'accensione, lo spegnimento e la regolazione è sensoriale agendo sulla base. L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio.



ANIMA

4W
5V DC
2700K - 575lm / 3000K - 589lm
CRI >80
Driver with plug not included
USB cable included
Dimmer on board

CE IP20

Matt Black - 2700K - Dimmer on board	1A1090400.27.06
Matt Black - 3000K - Dimmer on board	1A1090400.30.06

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori




USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132





Table luminaire powered by rechargeable battery with direct light for indoor use.	VIS À VIS is a conjuring trick, half way between technique and illusion. Once again, we decided to take away, seeking only the light. Transparency is the main feature of this battery-operated lamp.	The stem is in transparent methacrylate. The head is in matt white painted ABS. The upper diffuser is in transparent methacrylate.	The light source is LED with integrated module. The battery life is approx. 9 hours. The charger socket is located in the lower side of the head. The switch is located on the lower side of the head. VIS À VIS does not have a dimmer function. The power supply is plug-in and not included, but is available as an accessory. The USB-A/USB-C charger cable is included.
Apparecchio di illuminazione da tavolo, alimentato da una batteria ricaricabile, a luce diretta, per interni.	VIS À VIS è un gioco di prestigio, tra la tecnica e l'illusione. Abbiamo pensato, ancora una volta, di togliere, cercando solo la luce. La trasparenza è la caratteristica principale di questa lampada a batteria.	Lo stelo è in metacrilato trasparente. La testa è in ABS verniciata bianco opaco. Il diffusore superiore è in metacrilato trasparente.	La sorgente luminosa è a LED e a modulo integrato. L'autonomia della batteria è di circa 9 ore. La presa di ricarica è posizionata nella parte inferiore della testa. L'interruttore è posizionato nella parte inferiore della testa. VIS À VIS non è dimmerabile. L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio. Il cavo di ricarica USB-A/USB-C è incluso.

Finish	.00	Standard
--------	-----	----------



VIS À VIS

2W

2700K - 115lm / 3000K - 119lm

CRI >90

Driver with plug not included

USB cable included

ON/OFF

CE IP20

Standard - 2700K - ON/OFF	1A4530000.27.00
Standard - 3000K - ON/OFF	1A4530000.30.00

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

LED modules / Moduli LED



LED module / Modulo LED		Included
Standard	2W - 2700K - 115lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.27.00
	2W - 3000K - 119lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.30.00

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132

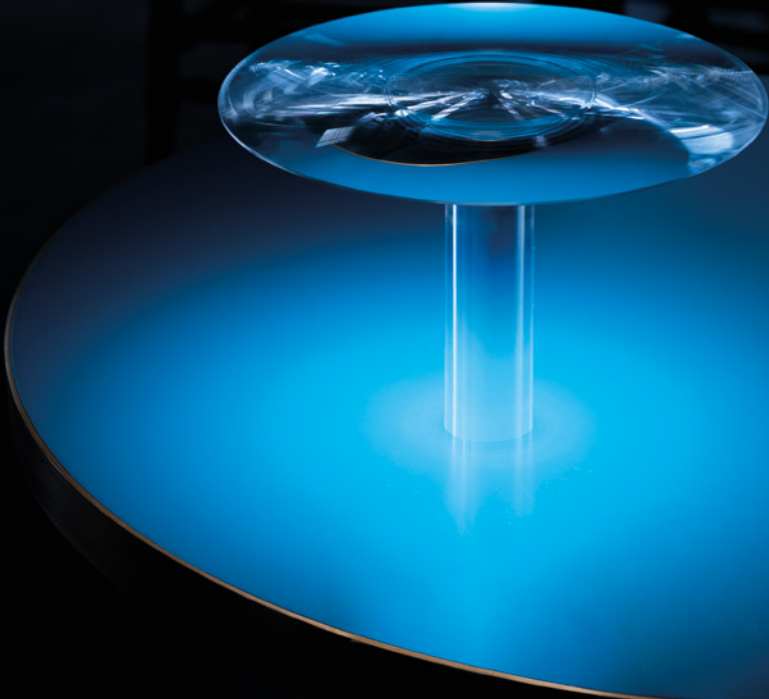





Table luminaire with direct light for indoor use.	A light antenna. Antennas are mysterious, absolute and intrinsically beautiful, because their essentialness expresses nothing more than their function.	The base is painted matt black anodised aluminium. The stem is in matt black fibreglass and can be tilted. The spotlight is in matt black anodised aluminium and is adjustable in one direction.	The light source is LED with integrated module. The matt black USB-A/USB-C electric cable is 2,5 m long and is included. The power socket is fitted into the base. The luminaire is switched on and off and controlled by a button fitted into the base. The power supply is plug-in and not included, but is available as an accessory.
Apparecchio di illuminazione da tavolo, a luce diretta, per interni.	Un'antenna di luce. Le antenne sono misteriose, assolute e intrinsecamente belle perché esprimono, con la loro essenzialità, null'altro che la loro funzione.	La base è in alluminio verniciata nero opaco. Lo stelo è in fibra di vetro nero opaco ed è inclinabile. Il proiettore è in alluminio anodizzato nero opaco sabbiato ed è orientabile in una direzione.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico USB-A/USB-C è di colore nero opaco e 2,5 m di lunghezza ed è incluso. La presa di alimentazione è posizionata nello spessore della base. L'accensione, lo spegnimento e la regolazione avviene mediante un pulsante posizionato nello spessore della base. L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio.

Compasso d'Oro ADI
Mention of Honour
2024



Finish	.04 Matt Black
--------	----------------




FM
1,5W
5V DC
2700K - 154lm / 3000K - 179lm
CRI >90
UGR <19
Driver with plug not included
USB cable included
Dimmer on board
CE IP20

Matt Black - 2700K - Dimmer on board	1A2440400.27.06
Matt Black - 3000K - Dimmer on board	1A2440400.30.06

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori




USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 2,5 m	1Z0000177





Table luminaire with diffuse light for indoor use.	MOON was created from the dream of bringing the moon inside your own home. The unryu kozo paper surface makes every lamp unique.	The base is in matt gold painted steel. The diffuser is in polypropylene and is hand-coated with unryu kozo paper.	It requires an E27 LED bulb, which is not included but is available as an accessory. The electric cable is in matt white. The switch / dimmer is fitted on the cable.
Apparecchio di illuminazione da tavolo, a luce diffusa, per interni.	MOON nasce da un sogno, quello di portare la luna dentro casa. La superficie di carta unryu kozo, fatta a mano, rende unico ogni pezzo.	La base è in acciaio verniciata oro opaco. Il diffusore è in polipropilene rivestito a mano con carta unryu kozo.	La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio. Il cavo elettrico è di colore bianco opaco. L'interruttore / dimmer è disposto lungo il cavo.

Finish	.00	Standard
--------	-----	----------



MOON T
Max 15W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE □ IP20

Standard - Dimmer on board	1A2690000.00.06
----------------------------	-----------------

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - E27 - A60		Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790	

Other accessories / Altri accessori


Moisture barrier bag / Sacco barriera		Not included
Packaging for air and sea shipping	4A2690010	





Table luminaire powered by rechargeable battery with direct light for indoor use.	A variant of our model TeTaTeT. The lightweight head seems to hang in the air.	The base is in matt white painted steel. The stem is in transparent methacrylate. The head is in matt white painted ABS. The base fixing is magnetic.	The light source is LED with integrated module. The battery life is approx. 9 hours. The charger socket is located in the lower side of the head. The switch is located on the lower side of the head. TeTaTeT Flûte does not have a dimmer function. The power supply is plug-in and not included, but is available as an accessory. The USB-A/USB-C charger cable is included.
Apparecchio di illuminazione da tavolo, alimentato da una batteria ricaricabile, a luce diretta, per interni.	Una variante del nostro modello TeTaTeT. La testa appare leggera e sospesa nel vuoto.	La base è in acciaio verniciata bianco opaco. Lo stelo è in metacrilato trasparente. La testa è in ABS verniciata bianco opaco. Il fissaggio alla base è magnetico.	La sorgente luminosa è a LED e a modulo integrato. L'autonomia della batteria è di circa 9 ore. La presa di ricarica è posizionata nella parte inferiore della testa. L'interruttore è posizionato nella parte inferiore della testa. TeTaTeT Flûte non è dimmerabile. L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio. Il cavo di ricarica USB-A/USB-C è incluso.

Finish	.03 Matt White
	 Custom finish available on request (lamp head only). Finitura personalizzata su richiesta (solo per testa).



TeTaTeT Flûte

2W

2700K - 180lm / 3000K - 187lm

CRI >90

Driver with plug not included

USB cable included

ON/OFF

CE IP20

Matt White - 2700K - ON/OFF	1A2360300.27.00
Matt White - 3000K - ON/OFF	1A2360300.30.00

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

LED modules / Moduli LED



LED module / Modulo LED		Included
Matt White	2W - 2700K - 180lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.27.00
	2W - 3000K - 187lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.30.00

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132




Table / Tavolino		Not included
Matt White		1A4020300.00.00
Matt Black		1A4020400.00.00





Table luminaire with indirect light for indoor use.

Full and empty, light and shadow. A circular mirror to be positioned as you please, to both light and capture the surrounding space.

The screen is a circular mirror
The back of the mirror is painted matt blue.
The disc is adjustable in all directions.
The stem is in brushed brass.
The base is available in Verde Alpi marble or Travertine.

The light source is LED with integrated module.
The electric cable is matt black.
The switch / dimmer is fitted on the cable.
The power supply is plug-in and is included.

Apparecchio di illuminazione da tavolo, a luce indiretta, per interni.

Pieni e vuoti, luce e ombra. Uno specchio circolare può essere orientato a piacimento per illuminare e, nello stesso tempo, cogliere lo spazio circostante.

Lo schermo è costituito da uno specchio circolare.
Il retro dello specchio è verniciato blu opaco.
Il disco è orientabile in tutte le direzioni.
Lo stelo è in ottone spazzolato.
La base è disponibile in marmo verde alpi o in travertino.


La sorgente luminosa è a LED e a modulo integrato.
Il cavo elettrico è di colore nero opaco.
L'interruttore / dimmer è lungo il cavo.
L'alimentatore è a spina ed è incluso.

Finish

.00 Standard




Custom finish available on request (rear disc only).
Finitura personalizzata su richiesta (solo per retro del disco).



CALVINO
Travertine base
13W
100-240V - 50/60Hz
2700K - 1275lm / 3000K - 1372lm
CRI >90
Driver with plug included
Dimmer on board
CE IP20

Standard - 2700K - Dimmer on board	1A6410000.27.06
Standard - 3000K - Dimmer on board	1A6410000.30.06



CALVINO
Green Alps marble base
13W
100-240V - 50/60Hz
2700K - 1275lm / 3000K - 1372lm
CRI >90
Driver with plug included
Dimmer on board
CE IP20


Standard - 2700K - Dimmer on board	1A6420000.27.06
Standard - 3000K - Dimmer on board	1A6420000.30.06





Table luminaire powered by rechargeable battery with diffuse light for indoor use.	A soft, lightweight light. A lamp designed to enjoy wonderful diffuse light but without an electric cable.	The base is in matt gold painted aluminium. The diffuser is in matt white methacrylate.	The light source is LED with integrated module. The battery life is approx. 9 hours. The charger socket is fitted into the base. The switch is fitted into the base. BUGIA does not have a dimmer function. The power supply is plug-in and not included, but is available as an accessory. The USB-A/USB-C charger cable is included.
Apparecchio di illuminazione da tavolo, alimentato da una batteria ricaricabile, a luce diffusa, per interni.	Una luce morbida e leggera. Una lampada pensata per godere di una meravigliosa luce diffusa senza il vincolo del cavo elettrico.	La base è in alluminio verniciato oro opaco. Il diffusore è in metacrilato bianco opaco.	La sorgente luminosa è a LED e a modulo integrato. L'autonomia della batteria è di circa 9 ore. La presa di ricarica è posizionata nello spessore della base. L'interruttore è posizionato nello spessore della base. BUGIA non è dimmerabile. L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio. Il cavo di ricarica USB-A/USB-C è incluso.

Finish	.18 Matt Gold
	 Custom finish available on request. Finitura personalizzata su richiesta.



BUGIA

2W
3000K - 139lm
CRI >90
Driver with plug not included
USB cable included
ON/OFF
CE IP20

Matt Gold - 3000K - ON/OFF	1A2351800.30.00
----------------------------	-----------------

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori




USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132





Table luminaire powered by rechargeable battery with direct light for indoor use.	During a meal with friends, a ladle is repurposed to scoop the light and serve it at the table.	The base is in textured matt black painted steel. The stem and head are in polished chrome galvanised steel.	The light source is LED with integrated module. The battery life is approx. 9 hours. The charger socket is located in the lower side of the head. The switch is located on the lower side of the head. POST PRANDIUM does not have a dimmer function. The power supply is plug-in and not included, but is available as an accessory. The USB-A/USB-C charger cable is included.
Apparecchio di illuminazione da tavolo, alimentato da una batteria ricaricabile, a luce diretta, per interni.	Durante una cena tra amici, un mestolo è riutilizzato per raccogliere la luce e servirla al tavolo.	La base è in acciaio verniciata nero opaco texturizzato. Lo stelo e la testa sono in acciaio galvanizzati cromo lucido.	La sorgente luminosa è a LED e a modulo integrato. L'autonomia della batteria è di circa 9 ore. La presa di ricarica è posizionata nella parte inferiore della testa. L'interruttore è posizionato nella parte inferiore della testa. POST PRANDIUM non è dimmerabile. L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio. Il cavo di ricarica USB-A/USB-C è incluso.

Finish	.01 Polished Chrome
--------	---------------------



POST PRANDIUM

2W
3000K - 191lm
CRI >90
Driver with plug not included
USB cable included
ON/OFF
CE IP20

Polished Chrome - 3000K - ON/OFF	1A4550100.30.00
----------------------------------	-----------------

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132





Table luminaire with direct light for indoor use.

The light reaches the table spontaneously, almost as if a continuation of the electric cable. RIBBON is the result of research into simple and intuitive graphic gestures.

The base is in textured matt black painted steel. The arms are in matt black anodised aluminium and are connected by a tube in matt black silicone. The arms are adjustable in all directions.


The light source is LED with integrated module. The matt black USB-A/USB-C electric cable is 2,5 m long and is included. The luminaire is switched on and off and controlled by a sensor on the end of the upper tube. The power supply is plug-in and not included, but is available as an accessory.

Apparecchio di illuminazione da tavolo, a luce diretta, per interni.

La luce arriva sul tavolo con spontaneità, quasi come prosecuzione del cavo elettrico. RIBBON è il risultato della ricerca di un gesto grafico, semplice e intuitivo.

La base è in acciaio verniciata nero opaco texturizzato. I bracci sono in alluminio anodizzati nero opaco e sono collegati da un tubo in silicone nero opaco. I bracci sono orientabili in tutte le direzioni.

La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico USB-A/USB-C è di colore nero opaco e 2,5 m di lunghezza ed è incluso. L'accensione, lo spegnimento e la regolazione è sensoriale agendo sulla parte terminale del tubo superiore. L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio.



RIBBON

- 6W
- 5V DC
- 2700K - 230lm / 3000K - 230lm
- CRI >90
- Driver with plug not included
- USB cable included
- Dimmer on board
- CE IP20

Matt Black - 2700K - Dimmer on board	1A5850400.27.06
Matt Black - 3000K - Dimmer on board	1A5850400.30.06

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 2,5 m	1Z0000177

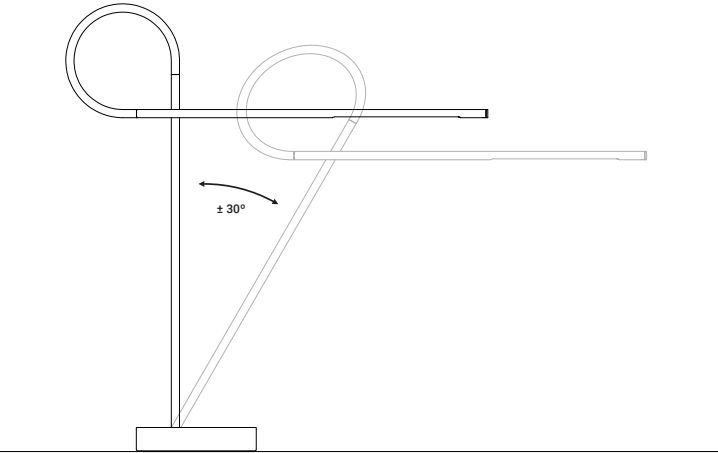
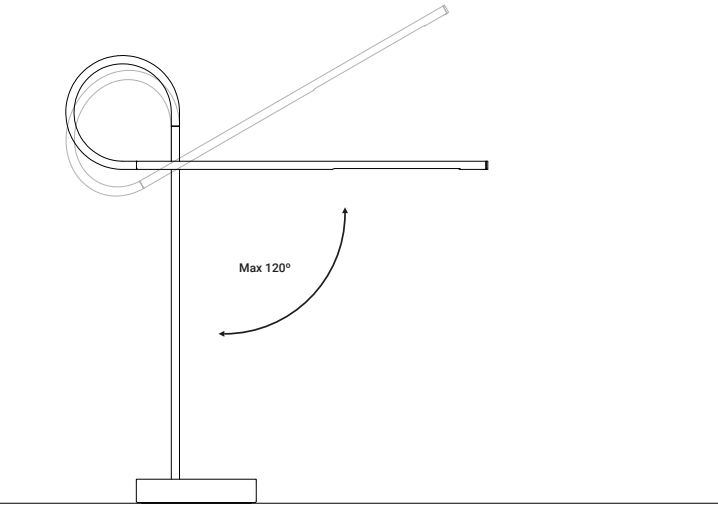




Table luminaire (with speaker)
powered by rechargeable battery
with direct light for indoor use.

Light*Music*Wireless.
Designed to produce both light and
music, any place, any time.
PoPuP offers a thrilling musical
experience, with excellent and
dynamic quality sound.
Listen to the light.

The base is in matt white painted
steel.
The stem is in matt white painted
aluminium.
The base fixing is magnetic.

The light source is LED with integrated
module.
The battery life is approx. 12 hours (light
only).
The charger socket is fitted on the upper
part of the stem.
The switch is located on the lower side
of the head.
PoPuP does not have a dimmer function.
The power supply is plug-in and is
included.


Apparecchio di illuminazione da
tavolo (con diffusore acustico),
alimentato da una batteria
ricaricabile, a luce diretta, per
interni.

Light*Music*Wireless.
Ideata per ottenere luce e musica
in qualsiasi luogo ed in qualunque
momento.
PoPuP permette di vivere
un'esperienza musicale emozionante
grazie ad un suono ampio e dinamico.
Ascolta la luce.

La base è in acciaio verniciata bianco
opaco.
Lo stelo e la testa sono in alluminio
verniciati bianco opaco.
Il fissaggio alla base è magnetico.

La sorgente luminosa è a LED e a modulo
integrato.
L'autonomia della batteria è di circa 12 ore
(solo luce).
La presa di ricarica è posizionata nella
parte superiore dello stelo.
L'interruttore è posizionato nella parte
inferiore della testa.
PoPuP non è dimmerabile.
L'alimentatore è a spina ed è incluso.

Finish	.03 Matt White
	 Custom finish available on request. Finitura personalizzata su richiesta.




PoPuP
2W
3000K - 183lm
CRI >80
Driver with plug included
ON/OFF
5W Audio - 50-20000Hz
CE IP20

Matt White - 3000K - ON/OFF	1A2610300.30.00
-----------------------------	-----------------


Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina	Included
Input 110-240V - 50/60Hz	1Z0000102
Output 14V DC - 0,3A - IP20	

Other accessories / Altri accessori



Rechargeable battery / Batteria ricaricabile		Included
Matt White	12V DC - NiMH 3700mAh Battery life 12 hours light only and 30 hours audio only at medium volume	1A2620300.00.00



WALL / PARETE



Wall or ceiling luminaire with direct light for indoor use.

An element of light.
Light is incorporated into the space, becoming an architectural element.

The base is in textured matt black or matt white painted steel.
The spotlight is in textured matt black, matt white painted aluminium or polished galvanised gold and is adjustable in all directions.
The joint is in polished gold or polished chrome galvanised brass, depending on the finish.

The light source is LED with integrated module.
The driver is integrated, with a dimmer function.
In the MIRA SWITCH version, the switch is located on the base.


Apparecchio di illuminazione da parete o da soffitto, a luce diretta, per interni.

Elemento di luce.
La luce si integra con lo spazio diventando elemento architettonico.

La base è in acciaio verniciata bianco opaco o nero opaco texturizzato.
Il proiettore è in alluminio verniciato bianco opaco, nero opaco texturizzato o galvanizzata oro lucido ed è orientabile in tutte le direzioni.
Lo snodo è in ottone galvanizzato cromo lucido o oro lucido in funzione della finitura.

La sorgente luminosa è a LED e a modulo integrato.
Il driver è integrato e dimmerabile.
Nella versione MIRA SWITCH l'interruttore è posizionato sulla base.


Finish	.03	Matt White	.04	Matt Black
	.49	Matt Black/Polished Gold		
 Custom finish available on request. Finitura personalizzata su richiesta.				



MIRA SWITCH

8W
110-240V - 50/60Hz
2700K - 327lm / 3000K - 352lm
CRI >90
Driver integrated
ON/OFF
CE IP20


Matt White - 2700K - ON/OFF	1A2280300.27.00
Matt White - 3000K - ON/OFF	1A2280300.30.00
Matt Black - 2700K - ON/OFF	1A2280400.27.00
Matt Black - 3000K - ON/OFF	1A2280400.30.00
Matt Black/Polished Gold - 2700K - ON/OFF	1A2284900.27.00
Matt Black/Polished Gold - 3000K - ON/OFF	1A2284900.30.00



MIRA

8W
110-240V - 50/60Hz
2700K - 327lm / 3000K - 352lm
CRI >90
Driver integrated
DALI - PUSH - 1-10V
CE IP20


Matt White - 2700K - DALI - PUSH - 1-10V	1A2280300.27.07
Matt White - 3000K - DALI - PUSH - 1-10V	1A2280300.30.07
Matt Black - 2700K - DALI - PUSH - 1-10V	1A2280400.27.07
Matt Black - 3000K - DALI - PUSH - 1-10V	1A2280400.30.07
Matt Black/Polished Gold - 2700K - DALI - PUSH - 1-10V	1A2284900.27.07
Matt Black/Polished Gold - 3000K - DALI - PUSH - 1-10V	1A2284900.30.07



MIRA ENDLESS

ENDLESS version only
6W - 0,16A
48V DC
2700K - 327lm / 3000K - 352lm
CRI >90
Driver not included
See page ENDLESS
CE IP20 E

Matt White - 2700K	1A2280300.27.40
Matt White - 3000K	1A2280300.30.40
Matt Black - 2700K	1A2280400.27.40
Matt Black - 3000K	1A2280400.30.40
Matt Black/Polished Gold - 2700K	1A2284900.27.40
Matt Black/Polished Gold - 3000K	1A2284900.30.40



MIRA ENDLESS CASAMBI


ENDLESS version only
7W - 0,18A
48V DC
2700K - 327lm / 3000K - 352lm
CRI >90
Driver not included
See page ENDLESS
CE IP20 E

Matt White - 2700K	1A2280300.27.41
Matt White - 3000K	1A2280300.30.41
Matt Black - 2700K	1A2280400.27.41
Matt Black - 3000K	1A2280400.30.41
Matt Black/Polished Gold - 2700K	1A2284900.27.41
Matt Black/Polished Gold - 3000K	1A2284900.30.41



Wall or ceiling luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The base is in textured matt black or matt white painted brass. The fixing is magnetic. The spotlight is in textured matt black, matt white painted aluminium or polished galvanised gold and is adjustable in all directions. The joint is in polished gold or polished chrome galvanised brass, depending on the finish.	The light source is LED with integrated module. MIRA MAGNETIC is powered by a matt white or matt black electric cable, depending on the luminaire finish. The power supply is plug-in and not included, but is available as an accessory. The switch / dimmer is fitted on the cable. The luminaire can also be powered by a remote driver, available as an accessory.
Apparecchio di illuminazione da parete o da soffitto, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	La base è in ottone verniciata bianco opaco o nero opaco texturizzato. Il fissaggio è magnetico. Il proiettore è in alluminio verniciato bianco opaco, nero opaco texturizzato o galvanizzata oro lucido ed è orientabile in tutte le direzioni. Lo snodo è in ottone galvanizzato cromo lucido o oro lucido in funzione della finitura.	La sorgente luminosa è a LED e a modulo integrato. MIRA MAGNETIC è alimentata mediante un cavo elettrico di colore bianco opaco o nero opaco in funzione della finitura. L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio. L'interruttore / dimmer è lungo il cavo. L'apparecchio può essere alimentato anche mediante un driver remoto disponibile come accessorio.

Finish	.03 Matt White	.04 Matt Black
	.49 Matt Black/Polished Gold	
	 Custom finish available on request. Finitura personalizzata su richiesta.	



MIRA MAGNETIC


5,6W
Max 500mA DC
2700K - 327lm / 3000K - 352lm
CRI >90
Driver not included

CE IP20


Matt White - 2700K	1A3680300.27.20
Matt White - 3000K	1A3680300.30.20
Matt Black - 2700K	1A3680400.27.20
Matt Black - 3000K	1A3680400.30.20
Matt Black/Polished Gold - 2700K	1A3684900.27.20
Matt Black/Polished Gold - 3000K	1A3684900.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 350mA - 18W - IP20 Dimmer on board	1A3180300.00.06
Matt Black	Input 100-240V - 50/60Hz Output 350mA - 20W - IP20 Dimmer on board	1A3180400.00.06




Driver / Alimentatore		Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500



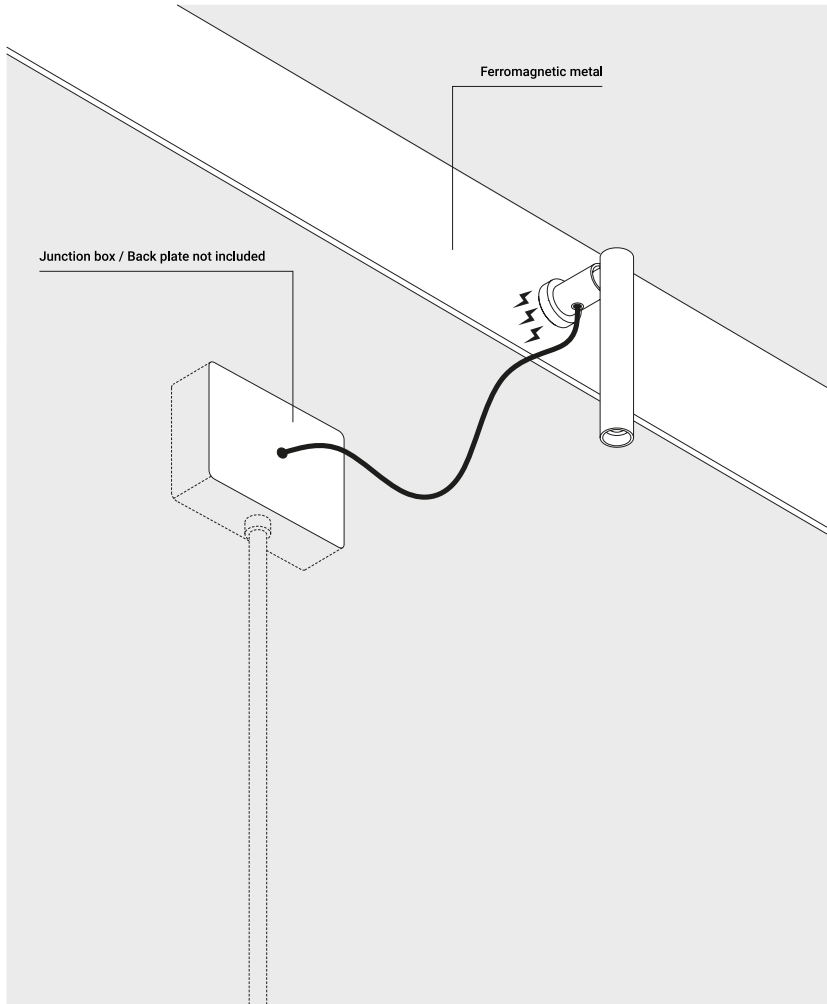

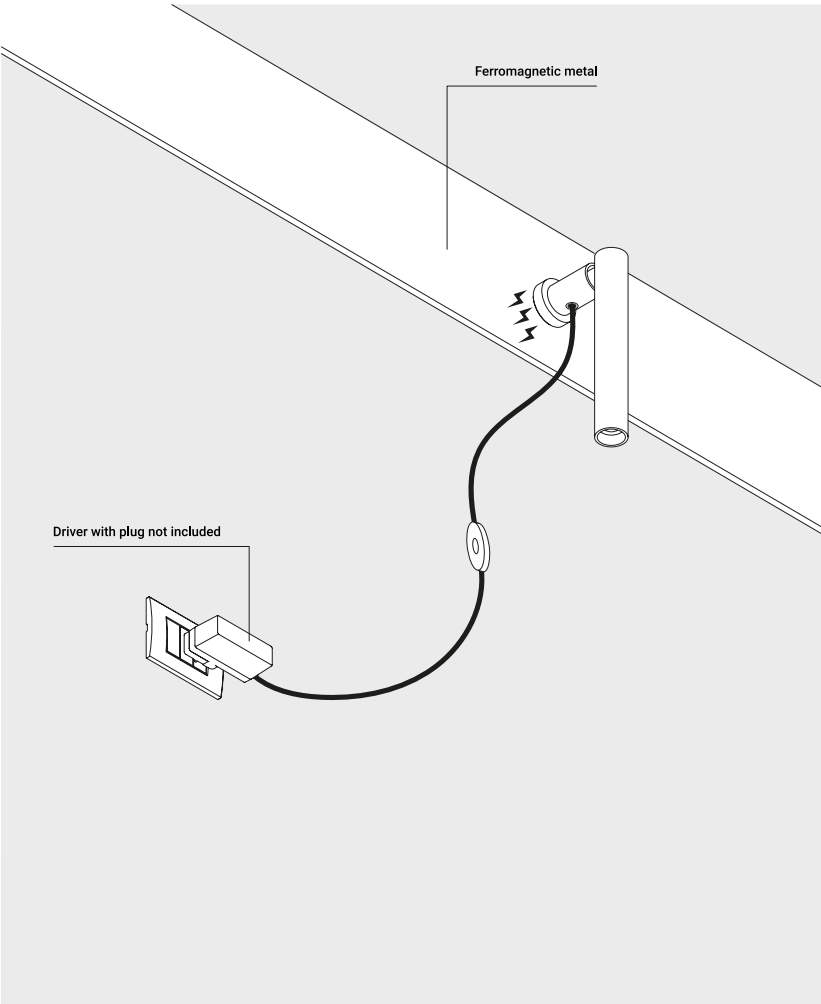Example of installation with remote driver




1A3180300.00.06 - 1A3180400.00.06 - Example of installation with driver with plug



Wall or ceiling luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The base is in textured matt black or matt white painted steel. The spotlight is in polished galvanised gold, textured matt black or matt white painted aluminium and is adjustable in all directions. A range of light control accessories is available. DOT P DE and DOT P DE 51 are dual emission.	The light source is LED with integrated module. The driver is integrated, with a dimmer function. The DOT P 51 and DOT P DE 51 versions require a GU10 LED bulb, which is not included but is available as an accessory.
---	--	--	--


Apparecchio di illuminazione da soffitto o da parete, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	La base è in acciaio verniciata bianco opaco o nero opaco texturizzato. Il proiettore è in alluminio verniciato bianco opaco, nero opaco texturizzato o galvanizzato oro lucido ed è orientabile in tutte le direzioni. Sono disponibili diversi accessori per il controllo della luce. DOT P DE e DOT P DE 51 sono a doppia emissione.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile. Nelle versioni DOT P 51 e DOT P DE 51 la lampadina prevista è a LED, con attacco GU10, e non è inclusa, ma disponibile come accessorio.
--	---	--	---

Finish	.03	Matt White	.04	Matt Black
	.49	Matt Black/Polished Gold		
	 Custom finish available on request. Finitura personalizzata su richiesta.			




DOT P
13W
100-240V - 50/60Hz
2700K / 3000K
CRI >97
Driver integrated
DALI - PUSH - 1-10V
CE IP20

Matt White - 2700K - DALI - PUSH - 1-10V	1A2340300.27.07
Matt White - 3000K - DALI - PUSH - 1-10V	1A2340300.30.07
Matt Black - 2700K - DALI - PUSH - 1-10V	1A2340400.27.07
Matt Black - 3000K - DALI - PUSH - 1-10V	1A2340400.30.07
Matt Black/Polished Gold - 2700K - DALI - PUSH - 1-10V	1A2344900.27.07
Matt Black/Polished Gold - 3000K - DALI - PUSH - 1-10V	1A2344900.30.07




DOT P 51
Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Matt White - ON/OFF	1A2490300.00.00
Matt Black - ON/OFF	1A2490400.00.00
Matt Black/Polished Gold - ON/OFF	1A2494900.00.00




DOT P ENDLESS
ENDLESS version only
13W - 0,34A
48V DC
2700K / 3000K
CRI >97
Driver not included
See page ENDLESS
CE IP20 E

Matt White - 2700K	1A2340300.27.40
Matt White - 3000K	1A2340300.30.40
Matt Black - 2700K	1A2340400.27.40
Matt Black - 3000K	1A2340400.30.40
Matt Black/Polished Gold - 2700K	1A2344900.27.40
Matt Black/Polished Gold - 3000K	1A2344900.30.40




DOT P ENDLESS CASAMBI
ENDLESS version only
13W - 0,34A
48V DC
2700K / 3000K
CRI >97
Driver not included
See page ENDLESS
CE IP20 E A

Matt White - 2700K	1A2340300.27.41
Matt White - 3000K	1A2340300.30.41
Matt Black - 2700K	1A2340400.27.41
Matt Black - 3000K	1A2340400.30.41
Matt Black/Polished Gold - 2700K	1A2344900.27.41
Matt Black/Polished Gold - 3000K	1A2344900.30.41



DOT P DE
Dual emission
29W
220-240V - 50/60Hz
2700K / 3000K
CRI >97
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI	1A4900300.27.01
Matt White - 3000K - DALI	1A4900300.30.01
Matt Black - 2700K - DALI	1A4900400.27.01
Matt Black - 3000K - DALI	1A4900400.30.01
Matt Black/Polished Gold - 2700K - DALI	1A4904900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A4904900.30.01



DOT P DE 51
Dual emission
Max 2x10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Matt White - ON/OFF	1A3810300.00.00
Matt Black - ON/OFF	1A3810400.00.00
Matt Black/Polished Gold - ON/OFF	1A3814900.00.00

Compulsory accessories / Accessori obbligatori

Other accessories / Altri accessori



Lens / Lente		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT P	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 1966lm	DOT P DE	
	3000K - CRI >97 - 2076lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT P	1A3100000.00.00
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS	
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 1886lm	DOT P DE	
	3000K - CRI >97 - 1992lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT P	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS	
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 1910lm	DOT P DE	
	3000K - CRI >97 - 2010lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT P	1A3120000.00.00
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 1930lm	DOT P DE	
	3000K - CRI >97 - 2032lm		

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape		Not included	
		DOT P /	1X0080400.01.00
		DOT P ENDLESS /	
		DOT P ENDLESS CASAMBI /	
		DOT P DE	



Elliptical filter / Filtro ellittico		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P /	1X0080000.02.00
		DOT P ENDLESS /	
		DOT P ENDLESS CASAMBI /	
		DOT P DE	



Blue filter / Filtro blu		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P /	1X0080000.03.00
		DOT P ENDLESS /	
		DOT P ENDLESS CASAMBI /	
		DOT P DE	



Red filter / Filtro rosso		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS /	1X0080000.04.00
		DOT P ENDLESS CASAMBI /	
		DOT P DE	



Yellow filter / Filtro giallo		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P /	1X0080000.05.00
		DOT P ENDLESS /	
		DOT P ENDLESS CASAMBI /	
		DOT P DE	

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16			Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y0330500	



LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580210	



LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580010	

Other accessories / Altri accessori



Darklight			Not included
LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580040	



25° beam filter / Filtro fascio 25°			Not included
LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580020	




36° beam filter / Filtro fascio 36°			Not included
LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580030	






Wall luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The base is in textured matt black or matt white painted steel. The spotlight is in polished galvanised gold, textured matt black or matt white painted aluminium and is adjustable in all directions. A range of light control accessories is available.	The light source is LED with integrated module and is not included but is available as an accessory. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da parete, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	La base è in acciaio verniciata bianco opaco o nero opaco texturizzato. Il proiettore è in alluminio verniciato bianco opaco, nero opaco texturizzato o galvanizzato oro lucido ed è orientabile in tutte le direzioni. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato, non è inclusa, ma disponibile come accessorio. Il driver è integrato e dimmerabile.

Finish	.03	Matt White	.04	Matt Black
	.49	Matt Black/Polished Gold		
	Custom finish available on request. Finitura personalizzata su richiesta.			




SPOT
Max 21W
220-240V - 50/60Hz
Driver integrated
DALI - PUSH - 1-10V
LED module not included
CE IP20

Matt White - DALI - PUSH - 1-10V	1A1080300.00.07
Matt Black - DALI - PUSH - 1-10V	1A1080400.00.07
Matt Black/Polished Gold - DALI - PUSH - 1-10V	1A1084900.00.07



SPOT ENDLESS
ENDLESS version only
Max 13W - 0,34A
48V DC
Driver not included
See page ENDLESS
LED module not included
CE IP20 E


Matt White	1A1080300.00.40
Matt Black	1A1080400.00.40
Matt Black/Polished Gold	1A1084900.00.40




SPOT ENDLESS CASAMBI
ENDLESS version only
Max 13W - 0,34A
48V DC
Driver not included
See page ENDLESS
LED module not included
CE IP20 E A

Matt White	1A1080300.00.41
Matt Black	1A1080400.00.41
Matt Black/Polished Gold	1A1084900.00.41


Compulsory accessories / Accessori obbligatori
LED modules / Moduli LED




DG111 LED module / Modulo LED DG111			Not included
16,7W - 15° - 500mA DC 2700K - 1349lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A4700000.27.20	
16,7W - 15° - 500mA DC 3000K - 1434lm - CRI >90 Energy Efficiency F - Dimmable		1A4700000.30.20	




DG111 LED module / Modulo LED DG111			Not included
16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A3890000.27.20	
16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable		1A3890000.30.20	




DG111 LED module / Modulo LED DG111			Not included
16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	SPOT	1A3900000.27.20	
16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable		1A3900000.30.20	



DG111 LED module / Modulo LED DG111			Not included
11,7W - 15° - 350mA DC 2700K - 990lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A4700000.27.20	
11,7W - 15° - 350mA DC 3000K - 1053lm - CRI >90 Energy Efficiency F - Dimmable		1A4700000.30.20	



DG111 LED module / Modulo LED DG111			Not included
11,7W - 22° - 350mA DC 2700K - 1322lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A3890000.27.20	
11,7W - 22° - 350mA DC 3000K - 1382lm - CRI >90 Energy Efficiency F - Dimmable		1A3890000.30.20	




DG111 LED module / Modulo LED DG111			Not included
11,7W - 36° - 350mA DC 2700K - 1276lm - CRI >90 Energy Efficiency F - Dimmable	SPOT ENDLESS / SPOT ENDLESS CASAMBI	1A3900000.27.20	
11,7W - 36° - 350mA DC 3000K - 1343lm - CRI >90 Energy Efficiency F - Dimmable		1A3900000.30.20	

Optional accessories / Accessori opzionali

Other accessories / Altri accessori


 73	Soft filter / Filtro soft		Not included
	Standard		1X0190000.03.00
 96	Louvre 1 / Frangiluce 1		Not included
	Matt Black		1X0190400.10.00
 96	Louvre 2 / Frangiluce 2		Not included
	Matt Black		1X0190400.11.00
 170	Parabola		Not included
	Matt Black		1X0190400.08.00
 62	Snoot		Not included
	Matt Black		1X0190400.09.00
 65	Louvre 3 / Frangiluce 3		Not included
	Matt Black	For Parabola - Snoot	1X0190400.12.00
 65	Louvre 4 / Frangiluce 4		Not included
	Matt Black	For Parabola - Snoot	1X0190400.13.00



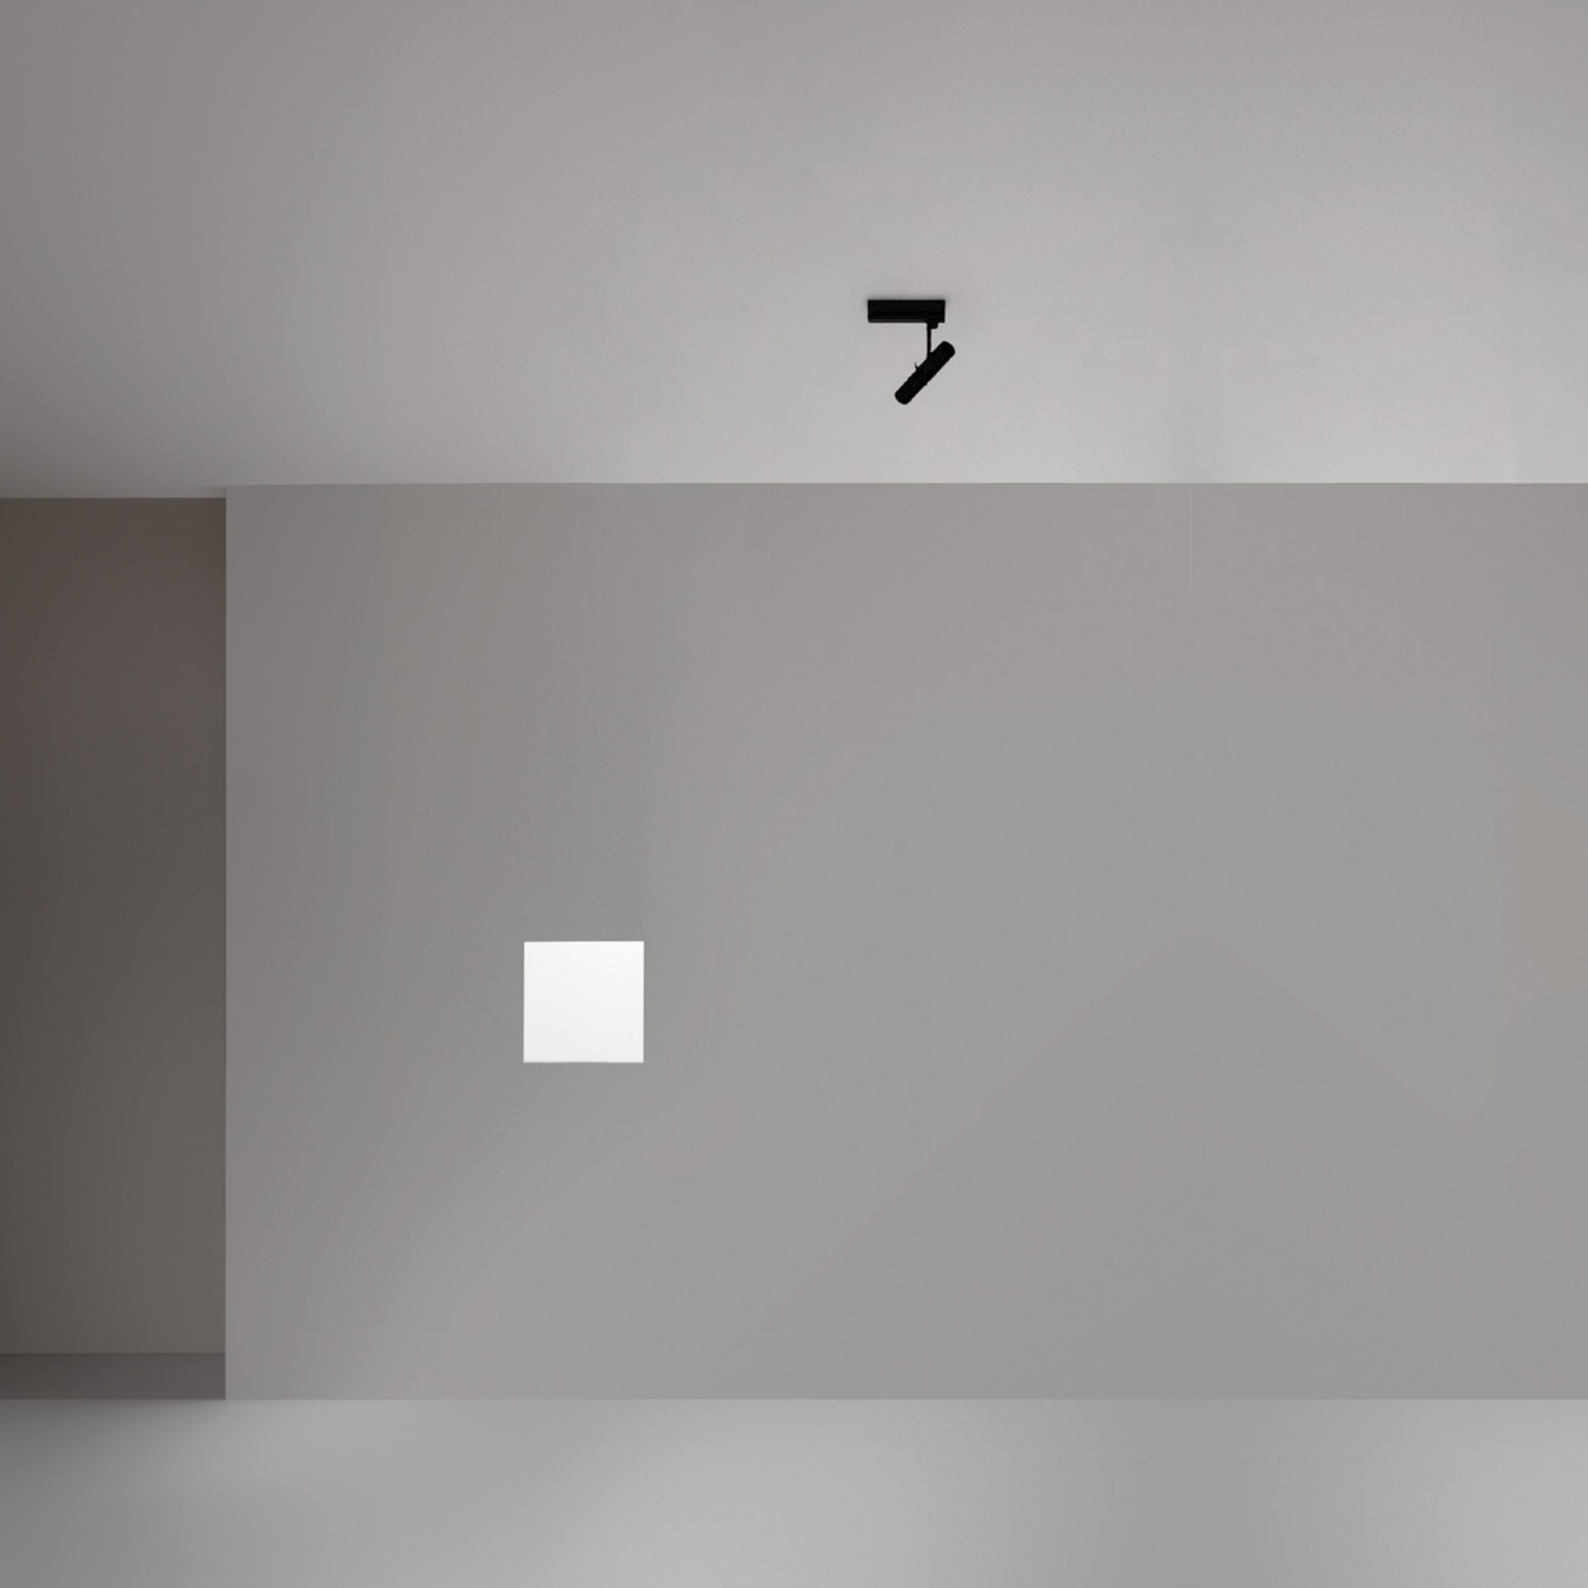


Wall or ceiling luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The base is in textured matt black or textured matt white painted steel. The spotlight is in matt black or matt white painted aluminium. D10 is adjustable in all directions.	The luminaire is used to shape the light beam. The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da soffitto o da parete, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	La base è in acciaio verniciata bianco opaco texturizzato o nero opaco texturizzato. Il proiettore è in alluminio verniciato nero opaco o bianco opaco. D10 è orientabile in tutte le direzioni.	L'apparecchio permette di sagomare il fascio luminoso. La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03 Matt White	.04 Matt Black
--------	----------------	----------------




D10
13W
220-240V - 50/60Hz
2700K - 266lm / 366lm
3000K - 316lm / 436lm
CRI >90
Beam 16°/ 36°
UGR <19
Driver integrated
TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT	1A6260300.27.02
Matt White - 3000K - TRIAC/IGBT	1A6260300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A6260400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A6260400.30.02



D10
13W
220-240V - 50/60Hz
2700K - 266lm / 366lm
3000K - 316lm / 436lm
CRI >90
Beam 16°/ 36°
UGR <19
Driver integrated
DALI - PUSH - 1-10V
CE IP20


Matt White - 2700K - DALI - PUSH - 1-10V	1A6260300.27.07
Matt White - 3000K - DALI - PUSH - 1-10V	1A6260300.30.07
Matt Black - 2700K - DALI - PUSH - 1-10V	1A6260400.27.07
Matt Black - 3000K - DALI - PUSH - 1-10V	1A6260400.30.07

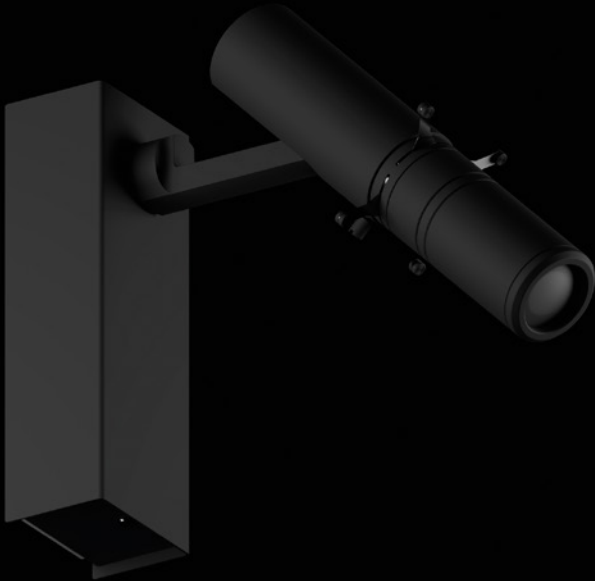




Wall or ceiling luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The base is in textured matt black or textured matt white painted steel. The spotlight is in matt black or matt white painted aluminium. D11 is adjustable in all directions. A range of light control accessories is available.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da soffitto o da parete, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	La base è in acciaio verniciata bianco opaco texturizzato o nero opaco texturizzato. Il proiettore è in alluminio verniciato nero opaco o bianco opaco. D11 è orientabile in tutte le direzioni. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03 Matt White	.04 Matt Black
--------	----------------	----------------



D11
21W
220-240V - 50/60Hz
2700K / 3000K
CRI >90
Driver integrated
TRIAC/IGBT
C E IP20

Matt White - 2700K - TRIAC/IGBT	1A6280300.27.02
Matt White - 3000K - TRIAC/IGBT	1A6280300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A6280400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A6280400.30.02



D11
21W
220-240V - 50/60Hz
2700K / 3000K
CRI >90
Driver integrated
DALI - PUSH - 1-10V
C E IP20

Matt White - 2700K - DALI - PUSH - 1-10V	1A6280300.27.07
Matt White - 3000K - DALI - PUSH - 1-10V	1A6280300.30.07
Matt Black - 2700K - DALI - PUSH - 1-10V	1A6280400.27.07
Matt Black - 3000K - DALI - PUSH - 1-10V	1A6280400.30.07

Compulsory accessories / Accessori obbligatori

Other accessories / Altri accessori




Lens / Lente		Not included
Beam - 15°	2700K - CRI >90 - 1607lm	1X0170000.02.00
	3000K - CRI >90 - 1681lm	
Beam - 24°	2700K - CRI >90 - 1624lm	1X0170000.03.00
	3000K - CRI >90 - 1699lm	
Beam - 38°	2700K - CRI >90 - 1683lm	1X0170000.04.00
	3000K - CRI >90 - 1761lm	
Beam - 50°	2700K - CRI >90 - 1544lm	1X0170000.05.00
	3000K - CRI >90 - 1615lm	

Optional accessories / Accessori opzionali

Other accessories / Altri accessori




Honeycomb louvre / Frangiluce nido d'ape		Not included
Matt White	1X0170300.01.00	
Matt Black	1X0170400.01.00	

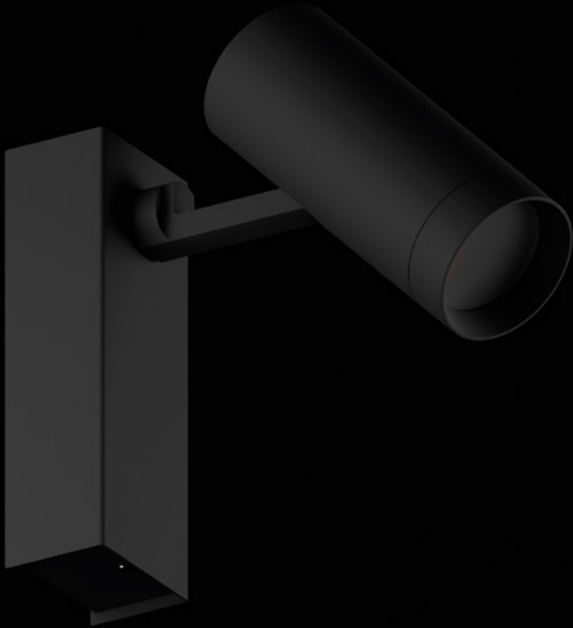




Wall or ceiling luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The base is in textured matt black or textured matt white painted steel. The spotlight is in matt black or matt white painted aluminium. D12 is adjustable in all directions. A range of light control accessories is available.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da soffitto o da parete, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	La base è in acciaio verniciata bianco opaco texturizzato o nero opaco texturizzato. Il proiettore è in alluminio verniciato nero opaco o bianco opaco. D12 è orientabile in tutte le direzioni. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03 Matt White	.04 Matt Black
--------	----------------	----------------




D12
29W
220-240V - 50/60Hz
2700K / 3000K
CRI >90
UGR <19
Driver integrated
PUSH - 1-10V
C E IP20

Matt White - 2700K - PUSH - 1-10V	1A6300300.27.04
Matt White - 3000K - PUSH - 1-10V	1A6300300.30.04
Matt Black - 2700K - PUSH - 1-10V	1A6300400.27.04
Matt Black - 3000K - PUSH - 1-10V	1A6300400.30.04



D12
29W
220-240V - 50/60Hz
2700K / 3000K
CRI >90
UGR <19
Driver integrated
DALI
C E IP20

Matt White - 2700K - DALI	1A6300300.27.01
Matt White - 3000K - DALI	1A6300300.30.01
Matt Black - 2700K - DALI	1A6300400.27.01
Matt Black - 3000K - DALI	1A6300400.30.01



D12
29W
220-240V - 50/60Hz
2700K / 3000K
CRI >90
UGR <19
Driver integrated
TRIAC/IGBT
C E IP20

Matt White - 2700K - TRIAC/IGBT	1A6300300.27.02
Matt White - 3000K - TRIAC/IGBT	1A6300300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A6300400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A6300400.30.02

Compulsory accessories / Accessori obbligatori

Other accessories / Altri accessori




Lens / Lente			Not included
Beam - 15°	2700K - CRI >90 - 1978lm	1X0160000.02.00	
	3000K - CRI >90 - 2102lm		
Beam - 24°	2700K - CRI >90 - 2602lm	1X0160000.03.00	
	3000K - CRI >90 - 2721lm		
Beam - 38°	2700K - CRI >90 - 2662lm	1X0160000.04.00	
	3000K - CRI >90 - 2783lm		
Beam - 50°	2700K - CRI >90 - 2441lm	1X0160000.05.00	
	3000K - CRI >90 - 2552lm		

Optional accessories / Accessori opzionali




Honeycomb louvre / Frangiluce nido d'ape			Not included
Matt White	1X0160300.01.00		
Matt Black	1X0160400.01.00		

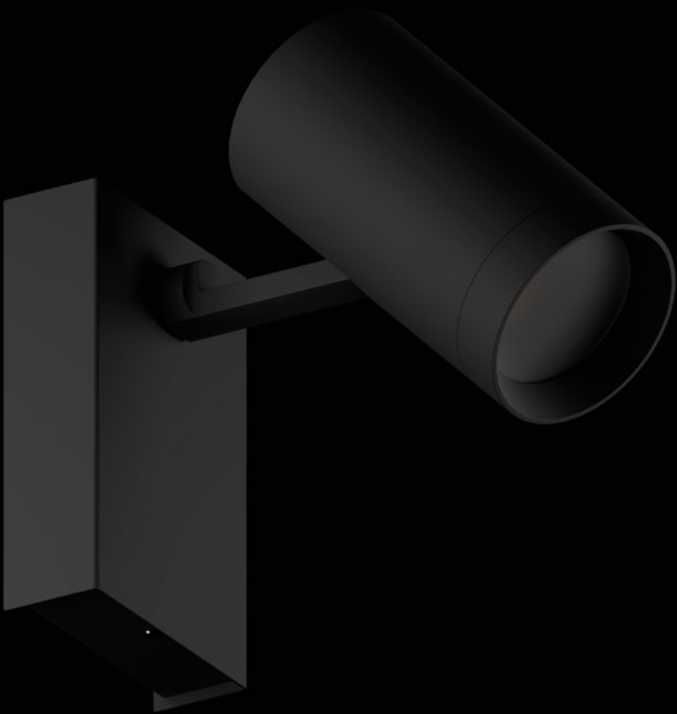




Wall luminaire with indirect light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in textured matt black or matt white painted aluminium.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da parete, a luce indiretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato bianco opaco o nero opaco texturizzato.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03 Matt White	.04 Matt Black
	Custom finish available on request. Finitura personalizzata su richiesta.	



SOL 1
12,5W
220-230V - 50/60Hz
2700K - 836lm / 3000K - 899lm
CRI >90
Driver integrated
TRIAC/IGBT
C E IP20

Matt White - 2700K - TRIAC/IGBT	1A3130300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3130300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3130400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3130400.30.02



SOL 2
24,5W
220-230V - 50/60Hz
2700K - 1681lm / 3000K - 1808lm
CRI >90
Driver integrated
TRIAC/IGBT
C E IP20


Matt White - 2700K - TRIAC/IGBT	1A3140300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3140300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3140400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3140400.30.02





Wall luminaire with indirect light for indoor use.	A thin mirror and a powerful LED. A magical, almost invisible luminaire for a light that multiplies spaces and offers unique perspectives, sudden depths and light illusions to the eye.	The base is in textured matt black painted steel. The back of the mirror is painted in matt black. REFLEX is also available in the suspension version.	The light source is LED with integrated module. The driver is not included but is available as an accessory.
Apparecchio di illuminazione da parete, a luce indiretta, per interni.	Uno specchio sottile e un LED potente. Un apparecchio magico e quasi invisibile per una luce che moltiplica gli spazi e regala allo sguardo prospettive inedite, profondità impreviste, illusioni di luce.	La base è in acciaio verniciata nero opaco texturizzato. Il retro dello specchio è verniciato nero opaco. REFLEX è disponibile anche in versione a sospensione.	La sorgente luminosa è a LED e a modulo integrato. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.04 Matt Black
--------	----------------




REFLEX
40W - 1,04A
48V DC
2700K - 3676lm / 3000K - 3761lm
CRI >90
Driver not included
CE IP20 E


Matt Black - 2700K	1A5500400.27.20
Matt Black - 3000K	1A5500400.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640




Driver / Alimentatore		Not included
220-240V	48V/60W/IP20/DALI	1Z0830820



Wall luminaire with diffuse light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in painted or galvanised steel in a range of finishes. The glass is sanded. TOAST is dual emission.	The light source is LED with integrated module. The driver is integrated and has no dimmer function. TOAST is also available with R7s LED bulb, which is not included but is available as an accessory.
Apparecchio di illuminazione da parete, a luce diffusa, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in acciaio verniciato o galvanizzato in varie finiture. I vetri sono sabbati. TOAST è a doppia emissione.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e non dimmerabile. TOAST è anche disponibile con lampadina a LED, con attacco R7s, e non è inclusa, ma disponibile come accessorio.

Finish	.01	Polished Chrome	.03	Matt White
	.04	Matt Black	.08	Brushed Brass
	.14	Brushed Chrome		
 Custom finish available on request. Finitura personalizzata su richiesta.				




TOAST

Max 100W - R7s
100-240V - 50/60Hz
ON/OFF
Bulb not included

CE IP20 0,5 m

Polished Chrome - ON/OFF	1A3290100.00.00
Matt White - ON/OFF	1A3290300.00.00
Matt Black - ON/OFF	1A3290400.00.00
Brushed Brass - ON/OFF	1A3290800.00.00
Brushed Chrome - ON/OFF	1A3291400.00.00



TOAST LED

12W
100-240V - 50/60Hz
2700K - 743lm / 3000K - 743lm
CRI >90
Driver integrated
ON/OFF

CE IP20

Polished Chrome - 2700K - ON/OFF	1A3280100.27.00
Polished Chrome - 3000K - ON/OFF	1A3280100.30.00
Matt White - 2700K - ON/OFF	1A3280300.27.00
Matt White - 3000K - ON/OFF	1A3280300.30.00
Matt Black - 2700K - ON/OFF	1A3280400.27.00
Matt Black - 3000K - ON/OFF	1A3280400.30.00
Brushed Brass - 2700K - ON/OFF	1A3280800.27.00
Brushed Brass - 3000K - ON/OFF	1A3280800.30.00
Brushed Chrome - 2700K - ON/OFF	1A3281400.27.00
Brushed Chrome - 3000K - ON/OFF	1A3281400.30.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine




LED - R7s COB - 78 mm		Not included	
220-240V - 4W - 330° 3000K - 450lm - CRI >80 Energy Efficiency E	TOAST	1Y0000138	





Wall luminaire with indirect light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in textured matt black or matt white painted aluminium.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da parete, a luce indiretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato bianco opaco o nero opaco texturizzato.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03 Matt White	.04 Matt Black
	 Custom finish available on request. Finitura personalizzata su richiesta.	




FOIL
24,5W
220-230V - 50/60Hz
2700K - 1681lm / 3000K - 1808lm
CRI >90
Driver integrated
TRIAC/IGBT
C € IP20

Matt White - 2700K - TRIAC/IGBT	1A3150300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3150300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3150400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3150400.30.02



Wall luminaire with diffuse light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in brushed galvanised brass, textured matt black or matt white painted steel. The glass is sanded. DUET is dual emission.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da parete, a luce diffusa, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in acciaio verniciato bianco opaco, nero opaco texturizzato o galvanizzato ottone spazzolato. I vetri sono sabbati. DUET è a doppia emissione.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03	Matt White	.04	Matt Black
	.08	Brushed Brass		
	 Custom finish available on request. Finitura personalizzata su richiesta.			



DUET
23W
220-240V - 50/60Hz
2700K - 1293lm / 3000K - 1352lm
CRI >90
Driver integrated
TRIAC/IGBT
C E IP20


Matt White - 2700K - TRIAC/IGBT	1A3300300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3300300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3300400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3300400.30.02
Brushed Brass - 2700K - TRIAC/IGBT	1A3300800.27.02
Brushed Brass - 3000K - TRIAC/IGBT	1A3300800.30.02





Wall luminaire with diffuse light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in textured matt black or matt white painted aluminium. The diffuser is in matt white methacrylate.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da parete, a luce diffusa, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato bianco opaco o nero opaco texturizzato. Il diffusore è in metacrilato bianco opaco.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03 Matt White	.04 Matt Black
	 Custom finish available on request. Finitura personalizzata su richiesta.	



LINET
11,5W
220-240V - 50/60Hz
2700K - 626lm / 3000K - 655lm
CRI >90
Driver integrated
TRIAC/IGBT
C E IP20

Matt White - 2700K - TRIAC/IGBT	1A3310300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3310300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3310400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3310400.30.02





Wall luminaire with indirect light
for indoor use.

An element of light.
Light is incorporated into the space,
becoming an architectural element.

The body is in matt white painted
steel.

The light source is LED with integrated
module.
The driver is integrated, with a dimmer
function.

Apparecchio di illuminazione da
parete, a luce indiretta, per interni.

Elemento di luce.
La luce si integra con lo spazio
diventando elemento architettonico.

Il corpo è in acciaio verniciato bianco
opaco.


La sorgente luminosa è a LED e a modulo
integrato.
Il driver è integrato e dimmerabile.

Finish

.03 Matt White



Custom finish available on request.
Finitura personalizzata su richiesta.



FOLDER
20W
110-240V - 50/60Hz
2700K - 397lm / 3000K - 415lm
CRI >80
Driver integrated
DALI
C E IP20


Matt White - 2700K - DALI	1A3350300.27.01
Matt White - 3000K - DALI	1A3350300.30.01






Wall luminaire with indirect light for indoor use.	A simple and elegant wall lamp.	The base is in matt black painted steel. The base cover disc is in polished gold galvanised steel. The cone is in matt black or matt white painted steel. The stem is in polished gold galvanised brass. A total matt white painted version is also available. The diffuser is in satin-finished methacrylate. VICEVERSA is dual emission.	The light sources are LED, with an integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da parete, a luce indiretta, per interni.	Una lampada da parete, semplice ed elegante.	La base è in acciaio verniciata nero opaco. Il disco di copertura della base è in acciaio galvanizzato oro lucido. Il cono è in acciaio verniciato bianco opaco o nero opaco. Lo stelo è in ottone galvanizzato oro lucido. È disponibile anche la versione con finitura totalmente verniciata bianco opaco. Il diffusore è in metacrilato satinato. VICEVERSA è a doppia emissione.	Le sorgenti luminose sono a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03	Matt White	.39	Matt White/Polished Gold
	.49	Matt Black/Polished Gold		
	 Custom finish available on request. Finitura personalizzata su richiesta.			




VICEVERSA
28W
110-240V - 50/60Hz
2700K - Up 1879lm - Down 170lm /
3000K - Up 1930lm - Down 170lm
CRI >90
Driver integrated
DALI
C € IP20

Matt White - 2700K - DALI	1A5310300.27.01
Matt White - 3000K - DALI	1A5310300.30.01
Matt White/Polished Gold - 2700K - DALI	1A5313900.27.01
Matt White/Polished Gold - 3000K - DALI	1A5313900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A5314900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A5314900.30.01




VICEVERSA
28W
110-240V - 50/60Hz
2700K - Up 1879lm - Down 170lm /
3000K - Up 1930lm - Down 170lm
CRI >90
Driver integrated
PUSH
C € IP20

Matt White - 2700K - PUSH	1A5310300.27.04
Matt White - 3000K - PUSH	1A5310300.30.04
Matt White/Polished Gold - 2700K - PUSH	1A5313900.27.04
Matt White/Polished Gold - 3000K - PUSH	1A5313900.30.04
Matt Black/Polished Gold - 2700K - PUSH	1A5314900.27.04
Matt Black/Polished Gold - 3000K - PUSH	1A5314900.30.04



VICEVERSA
28W
110-240V - 50/60Hz
2700K - Up 1879lm - Down 170lm /
3000K - Up 1930lm - Down 170lm
CRI >90
Driver integrated
1-10V
C € IP20

Matt White - 2700K - 1-10V	1A5310300.27.03
Matt White - 3000K - 1-10V	1A5310300.30.03
Matt White/Polished Gold - 2700K - 1-10V	1A5313900.27.03
Matt White/Polished Gold - 3000K - 1-10V	1A5313900.30.03
Matt Black/Polished Gold - 2700K - 1-10V	1A5314900.27.03
Matt Black/Polished Gold - 3000K - 1-10V	1A5314900.30.03




VICEVERSA
28W
110-240V - 50/60Hz
2700K - Up 1879lm - Down 170lm /
3000K - Up 1930lm - Down 170lm
CRI >90
Driver integrated
TRIAC/IGBT
C € IP20

Matt White - 2700K - TRIAC/IGBT	1A5310300.27.02
Matt White - 3000K - TRIAC/IGBT	1A5310300.30.02
Matt White/Polished Gold - 2700K - TRIAC/IGBT	1A5313900.27.02
Matt White/Polished Gold - 3000K - TRIAC/IGBT	1A5313900.30.02
Matt Black/Polished Gold - 2700K - TRIAC/IGBT	1A5314900.27.02
Matt Black/Polished Gold - 3000K - TRIAC/IGBT	1A5314900.30.02




Federico Delrosso / 2013		SHADE	
Wall luminaire with diffuse light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in matt black painted steel. The screen is a mirror. The glass is sanded. SHADE is dual emission.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da parete, a luce diffusa, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in acciaio verniciato nero opaco. Lo schermo è uno specchio. I vetri sono sabbati. SHADE è a doppia emissione.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.
Finish	.00	Standard	



SHADE
23W
220-240V - 50/60Hz
2700K - 1293lm / 3000K - 1352lm
CRI >90
Driver integrated
TRIAC/IGBT
C E IP20


Standard - 2700K - TRIAC/IGBT	1A3360000.27.02
Standard - 3000K - TRIAC/IGBT	1A3360000.30.02

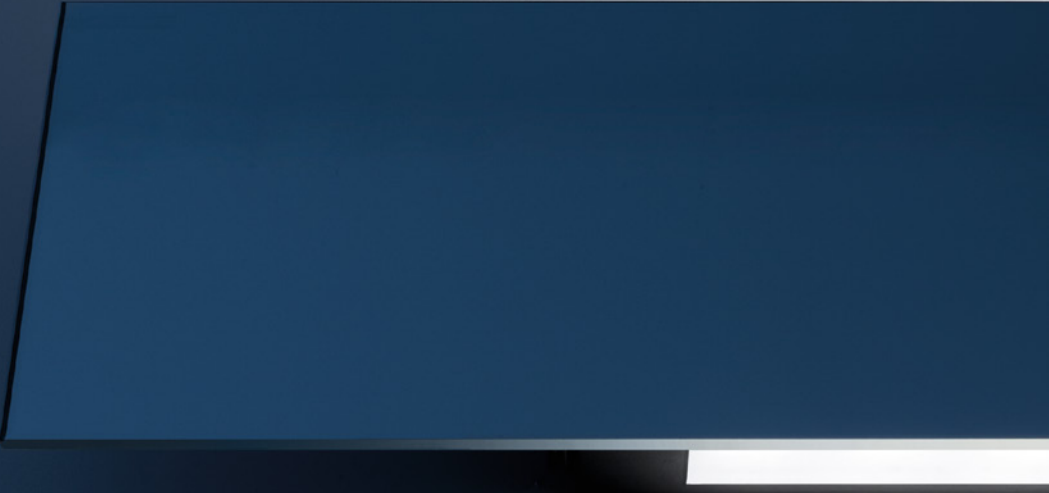



Wall or ceiling luminaire with diffuse light for indoor use.	A soft light that discretely embraces the space. An opaline glass ball turns light into intangible matter, eliminating any hardness.	The base is in sanded matt black anodised aluminium. The base cover disc is in textured matt black or matt white painted steel or in polished gold galvanised steel. The opaline ball is in triple-layer blown glass.	It requires an E27 LED bulb, which is not included but is available as an accessory.
Apparecchio di illuminazione da soffitto o da parete, a luce diffusa, per interni.	Una luce morbida che avvolge lo spazio con discrezione. Un vetro sferico opalino trasforma la luce in materia impalpabile ed elimina ogni durezza.	La base è in alluminio anodizzato nero opaco sabbiato. Il disco di copertura della base è in acciaio verniciato bianco opaco o nero opaco texturizzato o galvanizzato oro lucido. Il vetro sferico è opalino e in triplo strato soffiato.	La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio.

Finish	.03	Matt White	.04	Matt Black
	.19	Polished Gold		
 Custom finish available on request. Finitura personalizzata su richiesta.				



CALMA
Max 15W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Matt White - ON/OFF	1A6050300.00.00
Matt Black - ON/OFF	1A6050400.00.00
Polished Gold - ON/OFF	1A6051900.00.00


Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - E27 - A60		Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790	



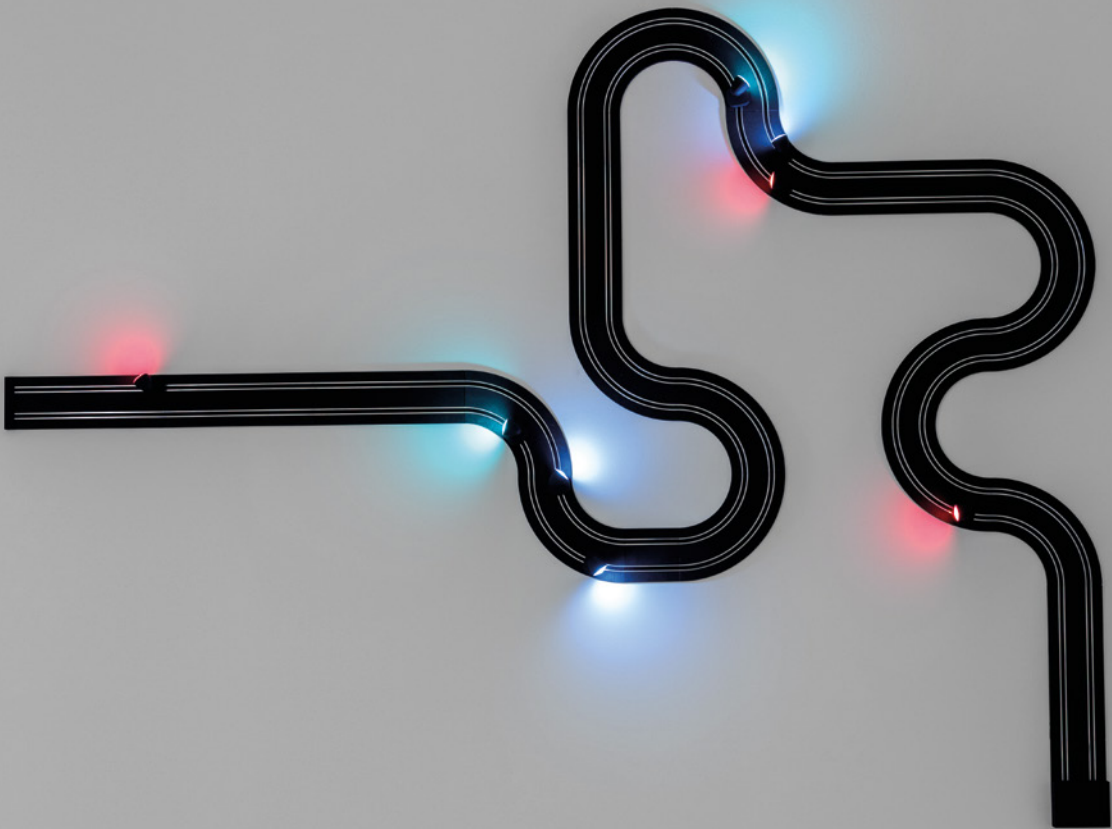

Wall luminaire with direct light for indoor use.

When light becomes fun.
RACE OF LIGHTS is an electrified toy track that carries current to power tiny light-cars.
The track can be set up as you desire, becoming the base for designing your own lighting system.
The light-cars are fixed with magnets, allowing you to freely create ever-changing compositions.
A simple and intuitive system, where light can be moved and reinvented whenever you wish.
A project that turns child's play into an inventive light experience.

The connection base and closing element are in textured matt black polyamide.
The track modules are in textured matt black polythene and can be arranged as you like.
The light-cars are in textured matt black polyamide and are magnetically fixed to the track.

The light-cars source is LED with integrated module and is available in white, red, green or blue.
RACE OF LIGHTS has no switch.
The power supply is plug-in and not included, but is available as an accessory.
The luminaire can also be powered by a remote driver, available as an accessory.

Apparecchio di illuminazione da parete, a luce diretta, per interni.

Quando la luce diventa divertimento.
RACE OF LIGHTS è una pista giocattolo elettrificata che porta corrente e alimenta piccole auto-macchinine.
Il percorso si compone a piacimento e diventa la base per costruire il proprio disegno di luce.
Le auto-macchinine si fissano magneticamente per creare composizioni libere e mutevoli.
Un sistema semplice e intuitivo, dove la luce può essere spostata e reinventata in ogni momento.
Un progetto che trasforma un'idea infantile in un'esperienza luminosa, tra gioco e invenzione.

La base di collegamento e l'elemento di chiusura sono in poliammide nero opaco texturizzato.
I moduli dell'autopista sono polietilene nero opaco texturizzato e sono componibili a piacimento.
Le auto-lampadine sono in poliammide nero opaco texturizzato e si fissano magneticamente sull'autopista.




La sorgente luminosa delle auto-macchinine è a LED e a modulo integrato e disponibile in bianco, rosso, verde o blu.
RACE OF LIGHTS non è dotata di interruttore.
L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio.
L'apparecchio può essere alimentato anche mediante un driver remoto disponibile come accessorio.

Finish

.00 Standard

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione

2x 	Race track kit / Kit pista da corsa			Not included
	Matt Black	Power connector and End cap included	1A6070400.01.00	
4x 				
6x 				
				
				



Lighting modules / Corpi illuminanti



White light-car / Auto luminosa bianca			Not included
Matt Black	24V DC - 2W - 3000K	1A6070400.05.00	
Red light-car / Auto luminosa rossa			Not included
Matt Black	24V DC - 2W	1A6070400.06.00	
Green light-car / Auto luminosa verde			Not included
Matt Black	24V DC - 2W	1A6070400.04.00	
Blue light-car / Auto luminosa blu			Not included
Matt Black	24V DC - 2W	1A6070400.07.00	




Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori

	Driver / Alimentatore			Not included
	220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	1Z0240410	
	Driver with plug / Alimentatore con spina			Not included
	Matt Black	Input 100-240V - 50/60Hz Output 24V DC - 20W - IP20	1A6070400.09.00	


Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione


	Short straight track / Segmento di pista corto rettilineo			Not included
	Matt Black	1 Piece	1A6070400.11.00	
	Long straight track / Segmento di pista lungo rettilineo			Not included
	Matt Black	1 Piece	1A6070400.10.00	
	Curved track / Segmento di pista curvo			Not included
	Matt Black	1 Piece	1A6070400.12.00	

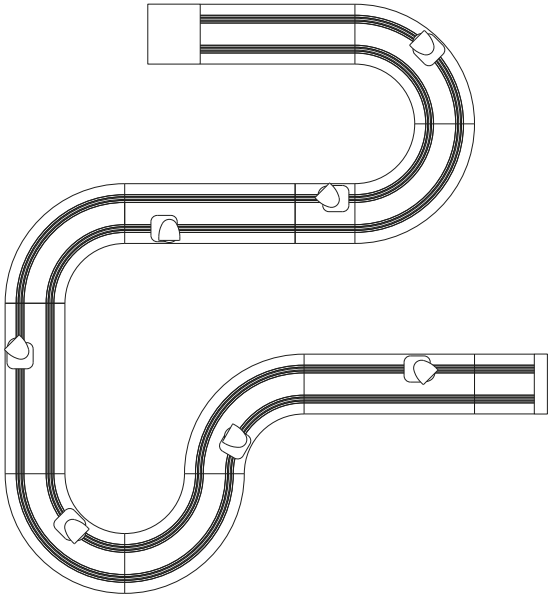


Example of installation

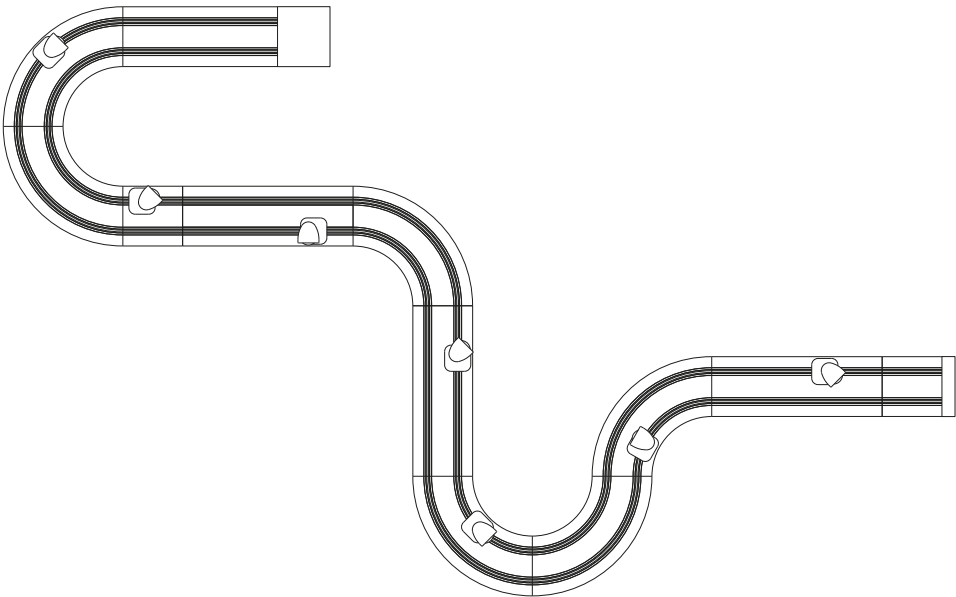


Example of installation

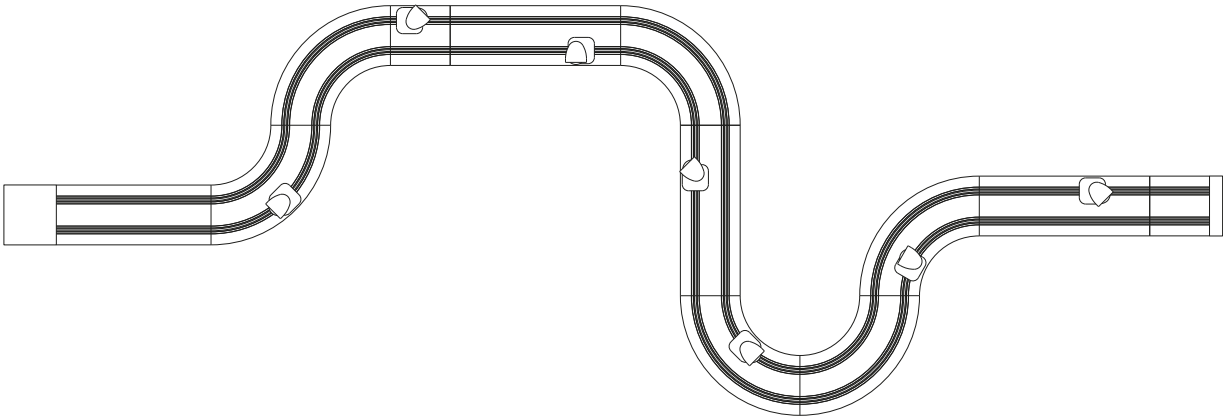

Example of installation

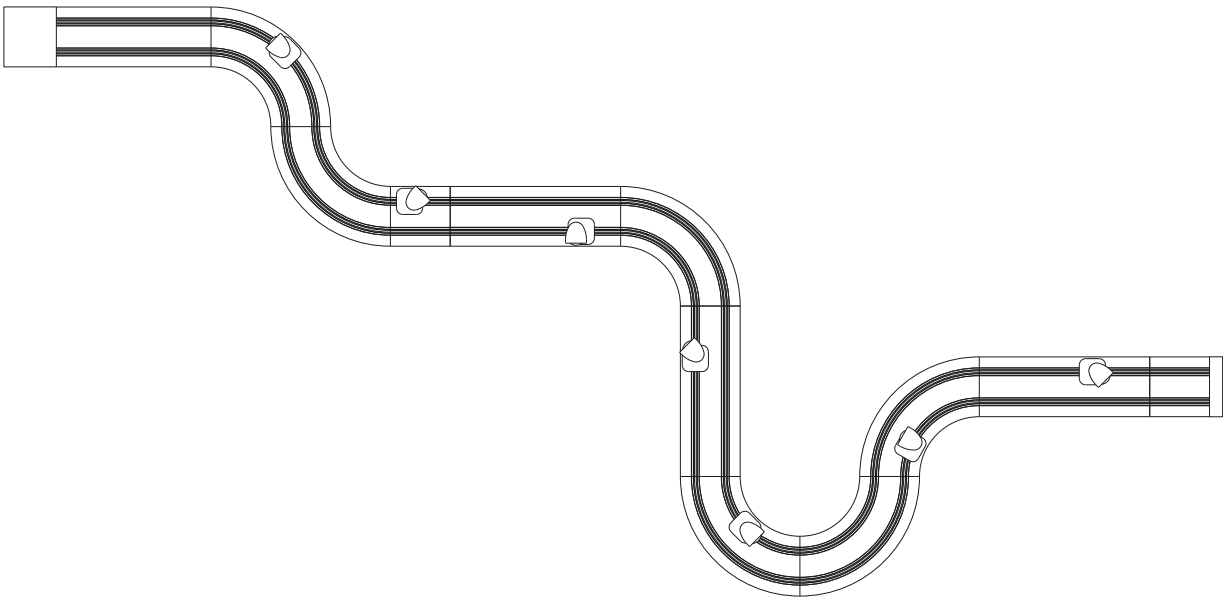

Example of installation

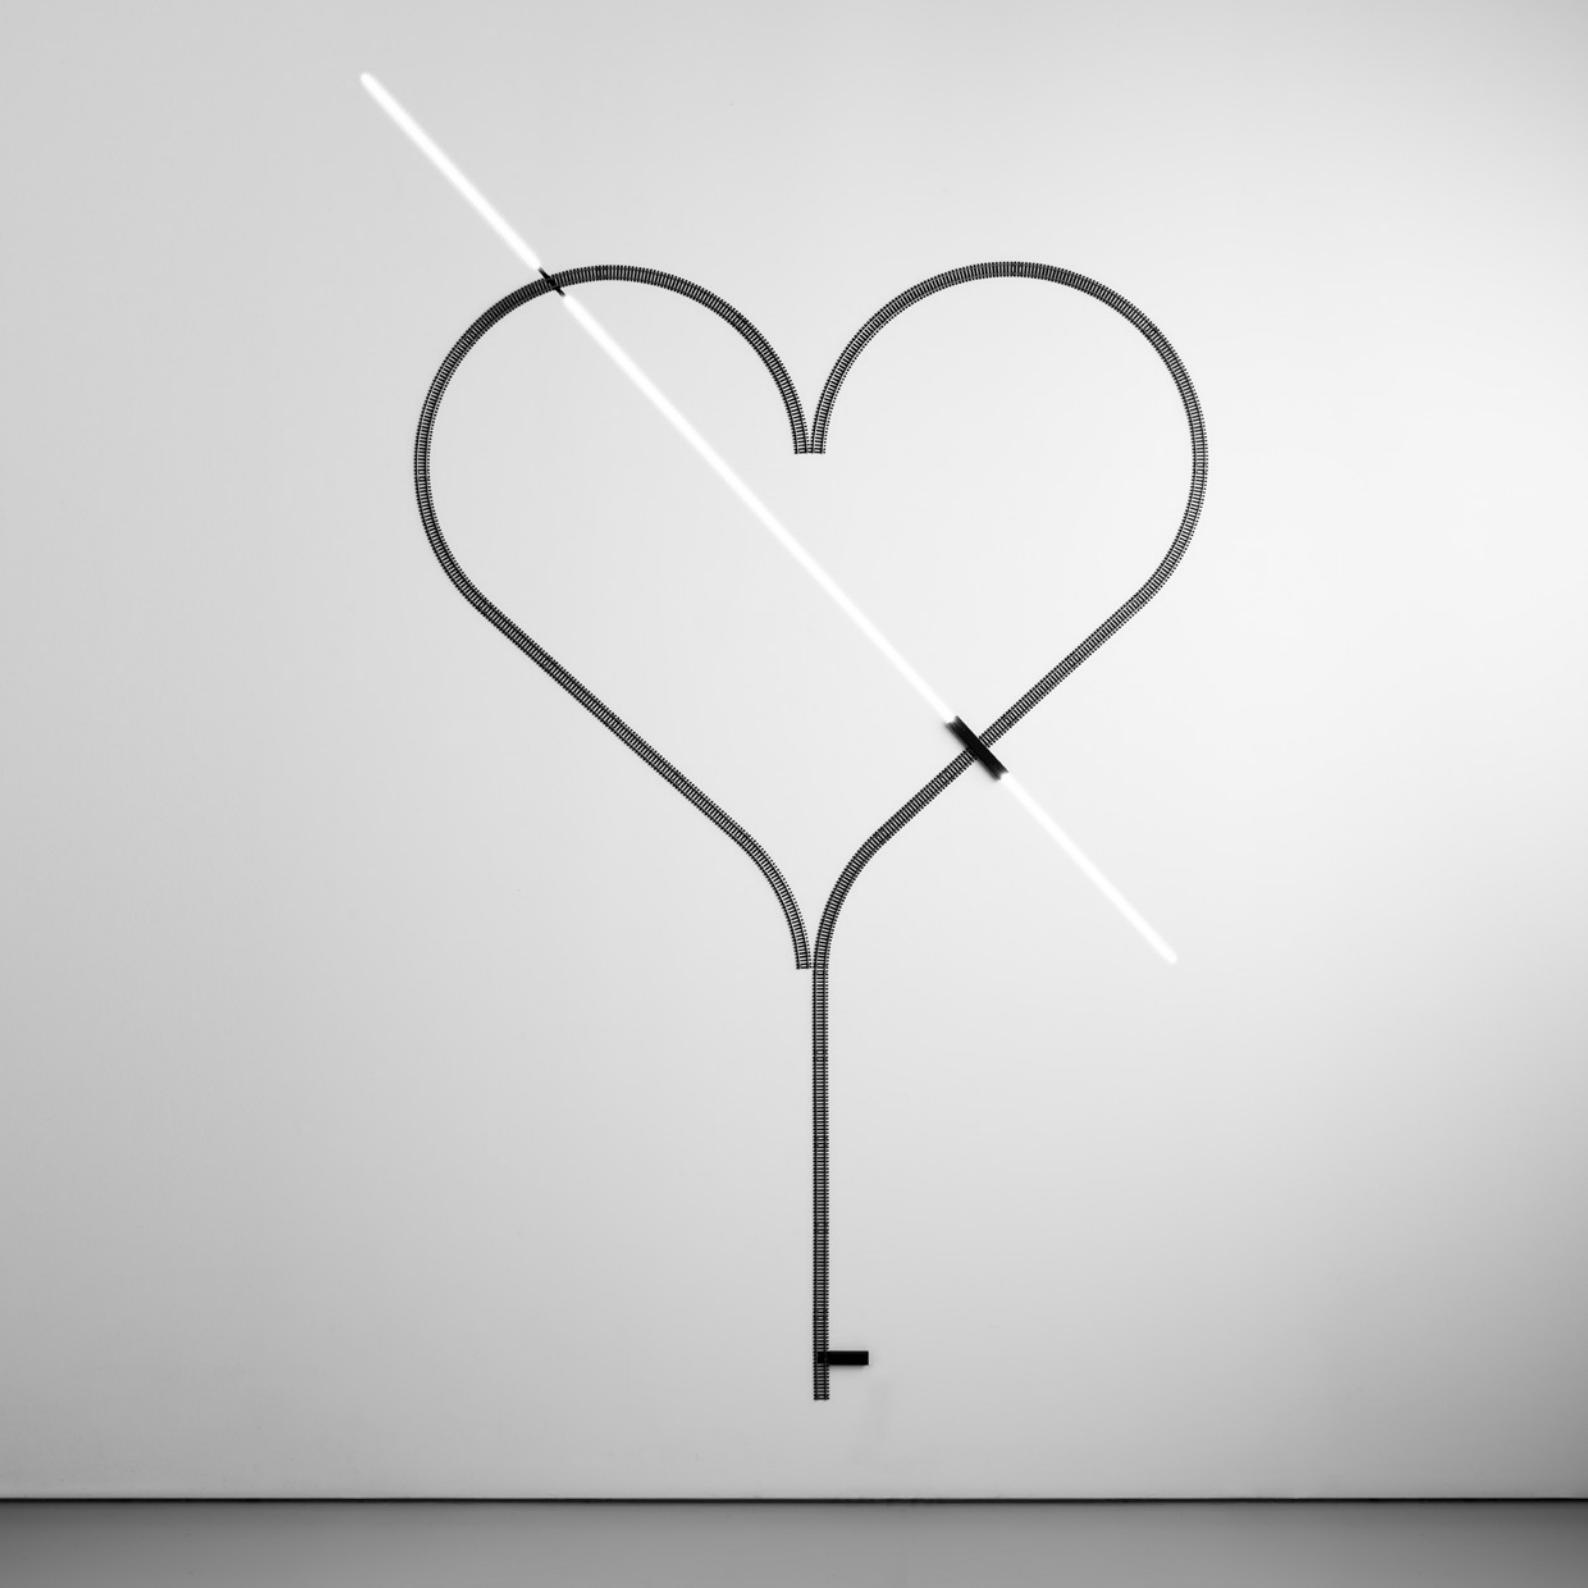

Wall luminaire with direct light for indoor use.

A ready-made project to design space with a sense of irony and weightlessness.
The tracks of an electric train can be used to draw a heart, but also to conduct electricity.
RAIL is the boundary between usefulness and show, between art and design.

The connection base is in textured matt black painted steel.
The track modules are in textured matt black polythene and steel.

The light source is LED with integrated module.
The electric cable is matt black.
The switch / dimmer is fitted on the cable.

Apparecchio di illuminazione da parete, a luce diretta, per interni.


Un ready-made per firmare lo spazio con ironia e leggerezza.
I binari di un trenino elettrico sono lo strumento per disegnare un cuore, ma anche per condurre la corrente elettrica.
RAIL è sul confine tra utilità e rappresentazione, design e arte.

La base di collegamento è in acciaio verniciata nero opaco texturizzato.
I moduli dei binari sono in acciaio e polietilene nero opaco texturizzato.

La sorgente luminosa è a LED e a modulo integrato.
Il cavo elettrico è di colore nero opaco.
L'interruttore / dimmer è disposto lungo il cavo.


Finish

.00 Standard



RAIL
22W
24V DC
3000K - 2000lm
CRI >90
Driver included
Dimmer on board
CE  IP20

Standard - 3000K - Dimmer on board	1A3400000.30.06
------------------------------------	-----------------

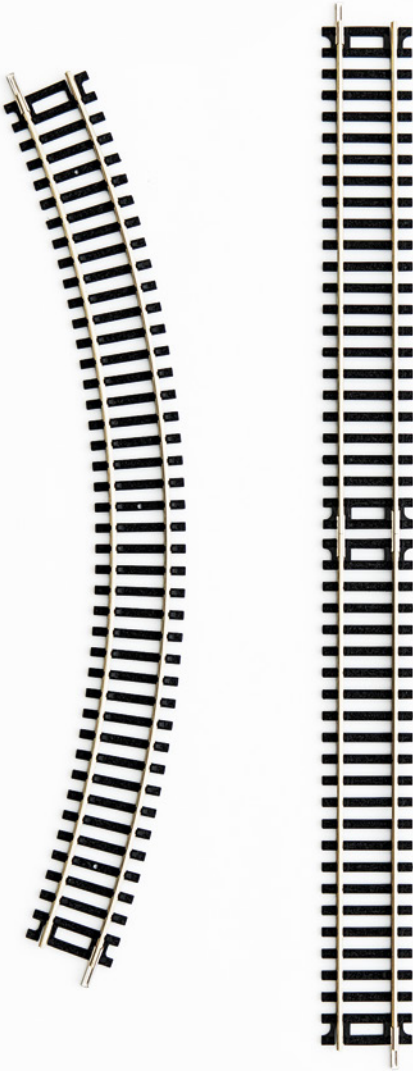


CEILING / SOFFITTO



Wall or ceiling luminaire with diffuse light for indoor use.	A pure, universal sign that offers a soft, adjustable light.	The structure is in textured matt black or matt white painted aluminium or in anodised oxidised copper. The panel is in matt white methacrylate.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da soffitto o da parete, a luce diffusa, per interni.	Un segno puro e universale, capace di donare una luce morbida e regolabile.	La struttura è in alluminio verniciata bianco opaco o nero opaco texturizzata o anodizzata rame ossidato. Il pannello è in metacrilato bianco opaco.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.


Finish	.03	Matt White	.04	Matt Black
	.32	Copper Oxide		
	 Custom finish available on request. Finitura personalizzata su richiesta.			



AURORA
36W
100-240V - 50/60Hz
3000K - 4500lm
CRI >90
Driver integrated
DALI - PUSH - 1-10V
CE  IP20


Matt White - 3000K - DALI - PUSH - 1-10V	1A4010300.30.07
Matt Black - 3000K - DALI - PUSH - 1-10V	1A4010400.30.07
Copper Oxide - 3000K - DALI - PUSH - 1-10V	1A4013200.30.07



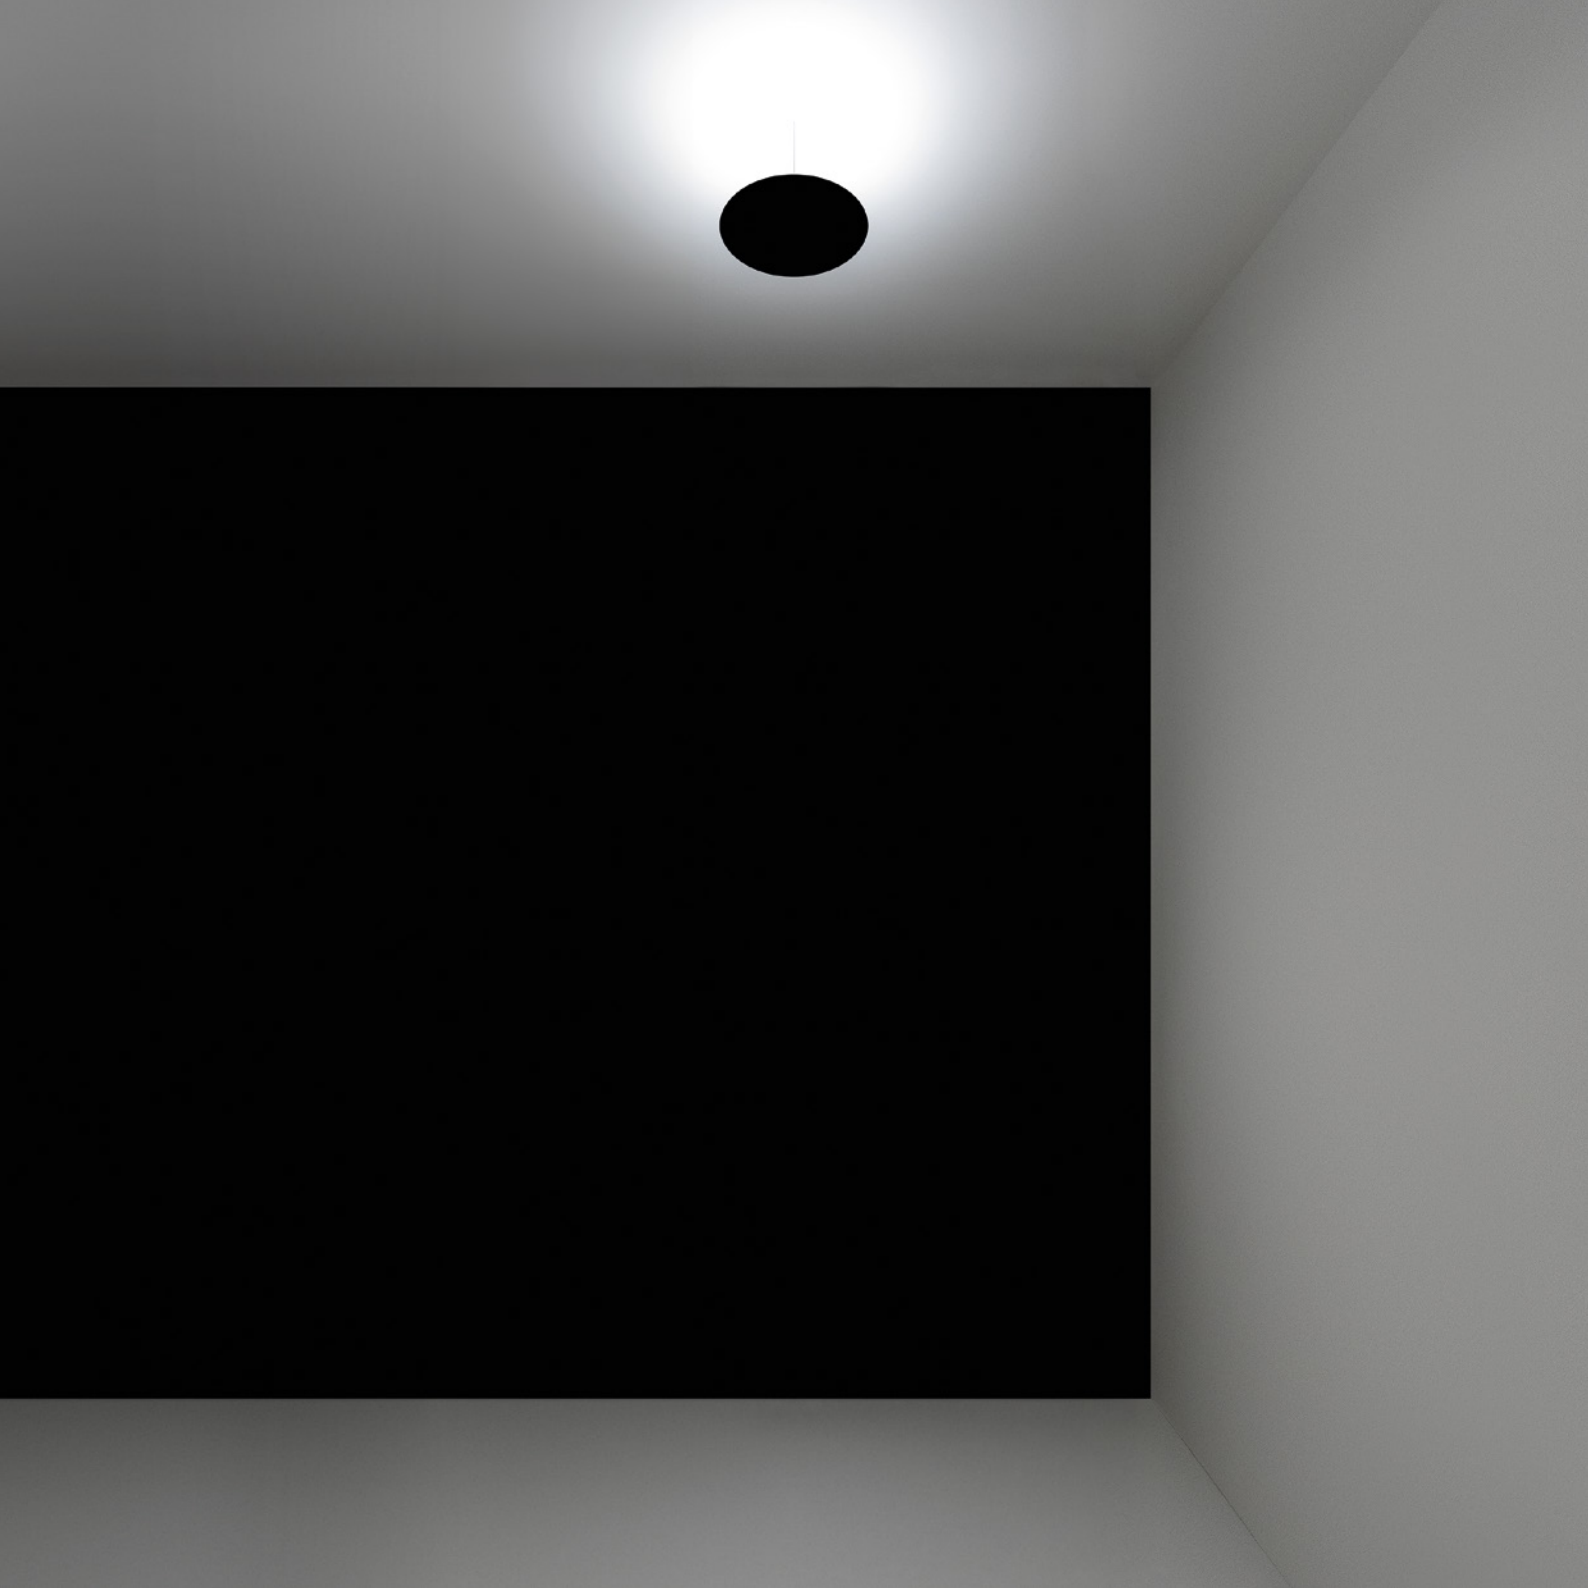

Ceiling luminaire with indirect light for indoor use.	Abstraction, purity, graphic sign. The disc appears enigmatic, the symbolic presence of the absence of light.	The roses available are in textured matt black or matt white painted steel. The disc is in textured matt black painted steel. Installation is recommended at 30 cm from the ceiling.	The light source is LED with integrated module. The electric cable is matt black and 1 m long. The driver is not included but is available as an accessory.
Apparecchio di illuminazione da soffitto, a luce indiretta, per interni.	Astrazione, purezza, segno grafico. Il disco appare enigmatico, presenza simbolica dell'assenza della luce.	I rosoni disponibili sono in acciaio verniciato bianco opaco o nero opaco texturizzato. Il disco è in acciaio verniciato nero opaco texturizzato. L'installazione è consigliata a 30 cm dal soffitto.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 1 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.27 Gravity Black
	Custom finish available on request. Finitura personalizzata su richiesta.



ASINTOTO
18W
Max 500mA DC
2700K - 1435lm / 3000K - 1481lm
CRI >90
Driver not included
CE IP20

Gravity Black - 2700K	1A4072700.27.20
Gravity Black - 3000K	1A4072700.30.20

Compulsory accessories / Accessori obbligatori

Suspension kits / Kit di sospensione




Ceiling rose without driver / Rosone senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00




Recessed rose without driver / Rosone da incasso senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.04.00

Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500



Driver / Alimentatore		Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Circular plasterboard panel 12,5 mm / Botola circolare per cartongesso 12,5 mm		Not included
Standard	Cut-out 400x400 mm Minimum space for mounting 115 mm	1A4520000.00.00

Other accessories / Altri accessori




Magnetic weight / Peso magnetico		Not included
Matt Black	For sloped installation	1A4710400.00.00



Ceiling luminaire with direct light for indoor use.	NULLA PL is the ceiling version of our model NULLA.	The body is in matt black (base) and matt white painted steel (plate).	The light source is LED with integrated module. In the NULLA PL 1 model, the driver is integrated and not dimmable. In the NULLA PL 2 model, the driver is not integrated but is available as an accessory.
Apparecchio di illuminazione da soffitto, a luce diretta, per interni.	NULLA PL è la versione a soffitto del nostro modello NULLA.	Il corpo è in acciaio verniciato bianco opaco (piastra) e nero opaco (base).	La sorgente luminosa è a LED e a modulo integrato. Nel modello NULLA PL 1 il driver è integrato e non dimmerabile. Nel modello NULLA PL 2 il driver non è integrato, ma è disponibile come accessorio.

Finish	.03 Matt White
--------	----------------




NULLA PL 1

Ceiling driver version
8,5W
100-240V - 50/60Hz
2700K - 460lm / 3000K - 495lm
CRI >90
Driver integrated
ON/OFF



Matt White - 2700K - ON/OFF	1A2500300.27.00
Matt White - 3000K - ON/OFF	1A2500300.30.00



NULLA PL 2


Remote driver version
6,5W
Max 550mA DC
2700K - 460lm / 3000K - 495lm
CRI >90
Driver not included




Matt White - 2700K	1A2500300.27.20
Matt White - 3000K	1A2500300.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V	550mA/20W/IP20/TRIAC/IGBT	NULLA PL 1	1Z0240850.550




Driver / Alimentatore			Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	NULLA PL 2	1Z0241270.550





Ceiling luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in textured matt black or matt white painted aluminium. DOT PL 51 is not adjustable. A range of light control accessories is available.	It requires an GU10 LED bulb, which is not included but is available as an accessory.
Apparecchio di illuminazione da soffitto, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato bianco opaco o nero opaco texturizzato. DOT PL 51 non è orientabile. Sono disponibili diversi accessori per il controllo della luce.	La lampadina prevista è a LED, con attacco GU10, e non è inclusa, ma disponibile come accessorio.

Finish	.03 Matt White	.04 Matt Black
	 Custom finish available on request. Finitura personalizzata su richiesta.	



DOT PL 51

Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included

CE IP20

Matt White - ON/OFF	1A3800300.00.00
Matt Black - ON/OFF	1A3800400.00.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500



LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210



LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010

Other accessories / Altri accessori



Darklight	Not included
LED SORAA - GU10 - MR16	1Y1580040



25° beam filter / Filtro fascio 25°	Not included
LED SORAA - GU10 - MR16	1Y1580020




36° beam filter / Filtro fascio 36°	Not included
LED SORAA - GU10 - MR16	1Y1580030





Wall or ceiling luminaire with direct light for indoor use.	The idea is to take direct light where it is needed using a normal electric cable. A simple project, almost a revival of the old electrical wiring.	The rose is in textured matt black or matt white painted steel. The spotlight is in textured matt black or matt white painted aluminium and steel. A range of light control accessories is available.	It requires an GU10 LED bulb, which is not included but is available as an accessory. The electric cable is matt white or matt black and is 2 m long.
Apparecchio di illuminazione da soffitto e da parete, a luce diretta, per interni.	È l'idea di portare la luce diretta dove si desidera mediante un normale cavo elettrico. Un progetto semplice, quasi la rivisitazione dei vecchi impianti elettrici.	Il rosone è in acciaio verniciato bianco opaco o nero opaco texturizzato. Il proiettore è in acciaio e alluminio verniciato bianco opaco o nero opaco texturizzato. Sono disponibili diversi accessori per il controllo della luce.	La lampadina prevista è a LED, con attacco GU10, e non è inclusa, ma disponibile come accessorio. Il cavo elettrico è di colore bianco opaco o nero opaco e 2 m di lunghezza.

Finish	.03 Matt White	.04 Matt Black
	 Custom finish available on request. Finitura personalizzata su richiesta.	



80
28
115
60

TRICK TRACK

Max 10W - GU10

100-240V - 50/60Hz

ON/OFF

Bulb not included

CE IP20

Matt White - ON/OFF	1A3430300.00.00
Matt Black - ON/OFF	1A3430400.00.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



80
28

Wall and ceiling rose / Rosone da parete e soffitto

Matt White

Matt Black

	1X0030300.01.00	Not included
	1X0030400.01.00	

Bulbs / Lampadine



80

LED - GU10 - PAR16

220-240V - 5,5W - 25°

3000K - 375lm - CRI >97

Energy Efficiency G - Dimmable

	1Y0330500	Not included
--	-----------	--------------



80

LED SORAA - GU10 - MR16

230V - 7,5W - 10°

2700K - 390lm - CRI >95

Energy Efficiency G - Dimmable

	1Y1580210	Not included
--	-----------	--------------



80

LED SORAA - GU10 - MR16

230V - 7,5W - 10°

3000K - 410lm - CRI >95

Energy Efficiency G - Dimmable

	1Y1580010	Not included
--	-----------	--------------

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



51

Darklight

LED SORAA - GU10 - MR16

	1Y1580040	Not included
--	-----------	--------------



50

25° beam filter / Filtro fascio 25°

LED SORAA - GU10 - MR16

	1Y1580020	Not included
--	-----------	--------------



50

36° beam filter / Filtro fascio 36°

LED SORAA - GU10 - MR16

	1Y1580030	Not included
--	-----------	--------------




Alberto Zattin / 2000

HAKO PL

Ceiling luminaire with diffuse light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in matt white painted steel. The glass is sanded.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da soffitto, a luce diffusa, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in acciaio verniciato bianco opaco. Il vetro è sabbato.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03 Matt White
	 Custom finish available on request. Finitura personalizzata su richiesta.



HAKO PL
12,5W
220-230V - 50/60Hz
2700K - 593lm / 3000K - 638lm
CRI >90
Driver integrated
TRIAC/IGBT
C E IP20

Matt White - 2700K - TRIAC/IGBT	1A3160300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3160300.30.02





Ceiling luminaire with direct light for indoor use.	Where did the chandelier go? A project about absence, about something missing. As if by removing the chandelier, its memory stays, but with a modern and sensual light.	The body is in natural or matt white painted brass.	The light source is LED with integrated module. The driver is integrated and has no dimmer function.
Apparecchio di illuminazione da soffitto, a luce diretta, per interni.	Dov'è finito il lampadario? Un progetto sull'assenza, su qualcosa che manca. Come se togliendo il lampadario, rimanga la sua memoria, ma con una luce moderna e sensuale.	Il corpo è in ottone verniciato bianco opaco o lasciato naturale.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e non dimmerabile.

Finish	.03 Matt White	.15 Natural Brass
	 Custom finish available on request. Finitura personalizzata su richiesta.	



SANMARTINO
8,5W
100-240V - 50/60Hz
2700K - 460lm / 3000K - 495lm
CRI >90
Driver integrated
ON/OFF
C E IP20


Matt White - 2700K - ON/OFF	1A3420300.27.00
Matt White - 3000K - ON/OFF	1A3420300.30.00
Natural Brass - 2700K - ON/OFF	1A3421500.27.00
Natural Brass - 3000K - ON/OFF	1A3421500.30.00






Ceiling luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in textured matt black or matt white painted steel. The spotlight is in matt grey painted aluminium. D8 is adjustable in all directions. A range of light control accessories is available.	The light source is LED with integrated module. The driver is integrated, with a dimmer function.
Apparecchio di illuminazione da soffitto, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in acciaio verniciato bianco opaco o nero opaco texturizzato. Il proiettore è in alluminio verniciato grigio opaco. D8 è orientabile in tutte le direzioni. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile.

Finish	.03 Matt White	.04 Matt Black
--------	----------------	----------------




D8 - 24°
14W
220-240V - 50/60Hz
2700K - 1184lm / 3000K - 1406lm
CRI >90
Beam 24°
Driver integrated
DALI - PUSH
C € IP20

Matt White - 2700K - DALI - PUSH	1A6190300.27.08
Matt White - 3000K - DALI - PUSH	1A6190300.30.08
Matt Black - 2700K - DALI - PUSH	1A6190400.27.08
Matt Black - 3000K - DALI - PUSH	1A6190400.30.08



D8 - 38°
14W
220-240V - 50/60Hz
2700K - 1157lm / 3000K - 1374lm
CRI >90
Beam 38°
Driver integrated
DALI - PUSH
C € IP20

Matt White - 2700K - DALI - PUSH	1A6200300.27.08
Matt White - 3000K - DALI - PUSH	1A6200300.30.08
Matt Black - 2700K - DALI - PUSH	1A6200400.27.08
Matt Black - 3000K - DALI - PUSH	1A6200400.30.08



D8 - 50°
14W
220-240V - 50/60Hz
2700K - 1110lm / 3000K - 1319lm
CRI >90
Beam 50°
Driver integrated
DALI - PUSH
C € IP20

Matt White - 2700K - DALI - PUSH	1A6210300.27.08
Matt White - 3000K - DALI - PUSH	1A6210300.30.08
Matt Black - 2700K - DALI - PUSH	1A6210400.27.08
Matt Black - 3000K - DALI - PUSH	1A6210400.30.08



Optional accessories / Accessori opzionali

Other accessories / Altri accessori




Honeycomb louvre / Frangiluce nido d'ape	Not included
Standard	1X0130000.01.00

RECESSED / INCASSO



Recessed luminaire with direct light for indoor use.	An extreme effort of subtraction. Nulla generates light and propagates mystery. NULLA is the most generous of our lamps. Its sole objective is to hide and give all the attention to whatever it is lighting. What we see is only a tiny black hole, as if it were drawn on the ceiling. A hole in the ceiling, a very bright LED and a lens generate light.	The body is in matt black anodised aluminium. The specific frame is required for installation in plasterboard ceilings. The specific formwork is required for installation in masonry or concrete ceilings. The required hole in the plasterboard and the clearance space above the plasterboard are specified in the dedicated accessories descriptions.	The light source is LED with integrated module. The driver is not included but is available as an accessory.
Apparecchio di illuminazione da incasso, a luce diretta, per interni.	Un lavoro estremo di sottrazione. NULLA genera luce e diffonde mistero. È la più generosa delle nostre lampade, quella che si nasconde al solo scopo di regalare la scena al soggetto illuminato. Ciò che appare è solo un minuscolo buco nero, quasi disegnato. Un foro nel soffitto, un LED potentissimo e una lente che generano la luce.	Il corpo è in alluminio anodizzato nero opaco. Per l'installazione in soffitti in cartongesso è obbligatorio l'utilizzo dell'apposito frame. Per l'installazione in soffitti in laterizio, o in calcestruzzo, è obbligatorio l'utilizzo dell'apposita cassaforma. Il foro richiesto nel cartongesso e lo spazio richiesto oltre il cartongesso sono specificati nelle relative descrizioni degli accessori.	La sorgente luminosa è a LED e a modulo integrato. Il driver non è incluso, ma è disponibile come accessorio.




NULLA - 23°

14W
24V DC
2700K - 347lm / 3000K - 357lm
CRI >90
Beam 23°
UGR <19
Driver not included



Standard - 2700K	1A4100000.27.20
Standard - 3000K	1A4100000.30.20



NULLA - 32°

14W
24V DC
2700K - 403lm / 3000K - 415lm
CRI >90
Beam 32°
UGR <19
Driver not included



Standard - 2700K	1A2110000.27.20
Standard - 3000K	1A2110000.30.20




NULLA 25 - 23°

9W
24V DC
2700K - 304lm / 3000K - 327lm
CRI >90
Beam 23°
UGR <19
Driver not included



Standard - 2700K	1A4080000.27.20
Standard - 3000K	1A4080000.30.20



NULLA 25 - 32°

9W
24V DC
2700K - 384lm / 3000K - 413lm
CRI >90
Beam 32°
UGR <19
Driver not included




Standard - 2700K	1A2020000.27.20
Standard - 3000K	1A2020000.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm				Not included
Matt Black	Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00	




Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00	




Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A3980400.00.00	



Plasterboard flange (bottom) ≠ 12,5 mm / Flangia (da sotto) per cartongesso ≠ 12,5 mm				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A4960400.00.00	




Masonry Box / Cassaforma per laterizio				Not included
Standard		NULLA 25	1A2380000.00.00	




Concrete box / Cassaforma per cemento				Not included
Standard		NULLA 25	1A2230000.00.00	

Optional accessories / Accessori opzionali
Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V	24V/20W/IP20/TRIAC/IGBT	1Z0240850.24	




Driver / Alimentatore			Not included
220-240V(110-127V)	24V/22W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.24	


Installation kits / Kit d'installazione




Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm				Not included
Standard	Cut-out 205x205 mm	NULLA	1A3780000.00.00	




Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm				Not included
Standard	Cut-out 415x415 mm	NULLA	1A3790000.00.00	

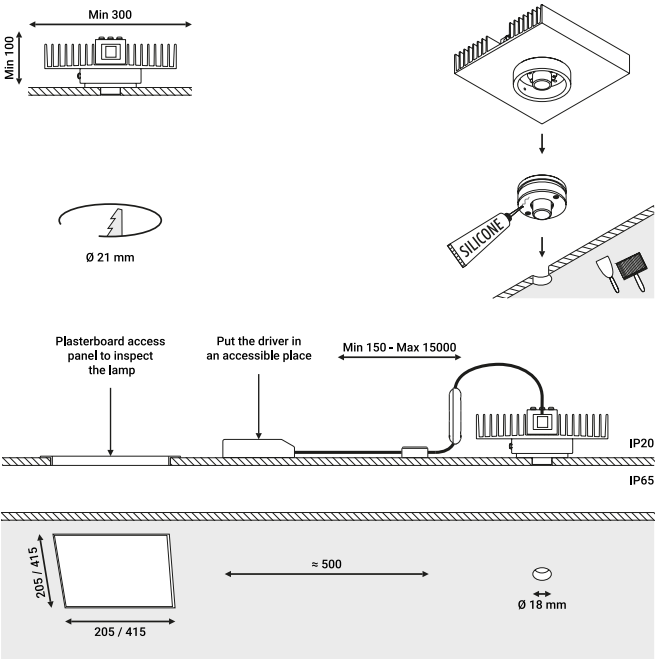

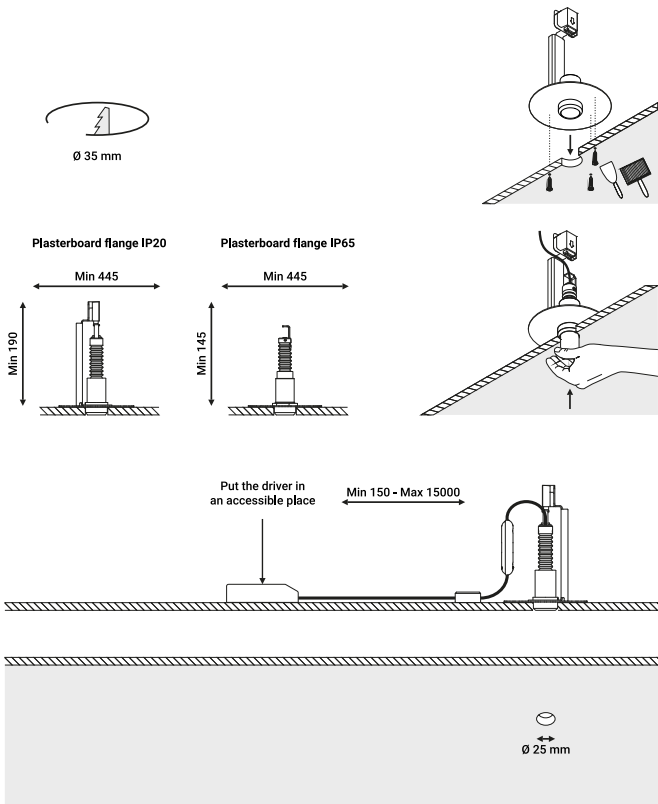1A2200400.00.00 - NULLA installation conditions



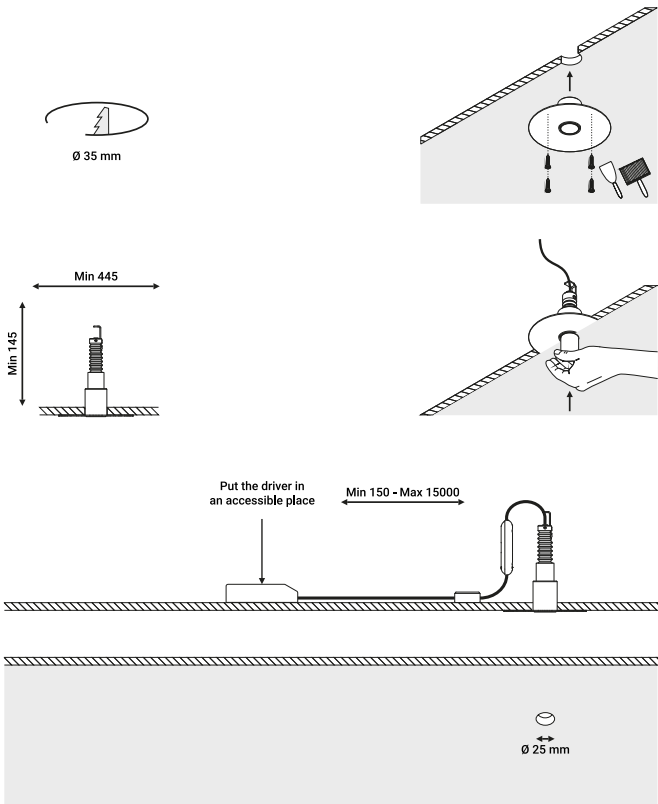1A2170400.00.00 - 1A3980400.00.00 - NULLA 25 installation conditions



1A4960400.00.00 - NULLA 25 installation conditions



Recessed, wall or ceiling luminaire with direct light for indoor use.

An element of light.
Light is incorporated into the space, becoming an architectural element.

The base is in textured matt black or matt white painted steel.
The spotlight is in textured matt black, matt white painted aluminium or polished galvanised gold and is adjustable in all directions.
The joint is in polished gold or polished chrome galvanised brass, depending on the finish.
Luminaire designed for plasterboard ceilings.
The required hole in the plasterboard is 40x40 mm.
The clearance space above the plasterboard is 60 mm.

The light source is LED with integrated module.
The driver is not included but is available as an accessory.


Apparecchio di illuminazione da incasso, da soffitto o da parete, a luce diretta, per interni.

Elemento di luce.
La luce si integra con lo spazio diventando elemento architettonico.

La base è in acciaio verniciata bianco opaco o nero opaco texturizzato.
Il proiettore è in alluminio verniciato bianco opaco, nero opaco texturizzato o galvanizzata oro lucido ed è orientabile in tutte le direzioni.
Lo snodo è in ottone galvanizzato cromo lucido o oro lucido in funzione della finitura.
L'apparecchio è dedicato a soffitti in cartongesso.
Il foro richiesto nel cartongesso è di 40x40 mm.
Lo spazio richiesto oltre il cartongesso è di 60 mm.

La sorgente luminosa è a LED e a modulo integrato.
Il driver non è incluso, ma è disponibile come accessorio.

Finish	.03	Matt White	.04	Matt Black
	.49	Matt Black/Polished Gold		
	Custom finish available on request. Finitura personalizzata su richiesta.			




MIRA R

5,6W
Max 500mA DC
2700K - 327lm / 3000K - 352lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K	1A3690300.27.20
Matt White - 3000K	1A3690300.30.20
Matt Black - 2700K	1A3690400.27.20
Matt Black - 3000K	1A3690400.30.20
Matt Black/Polished Gold - 2700K	1A3694900.27.20
Matt Black/Polished Gold - 3000K	1A3694900.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500




Driver / Alimentatore		Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500



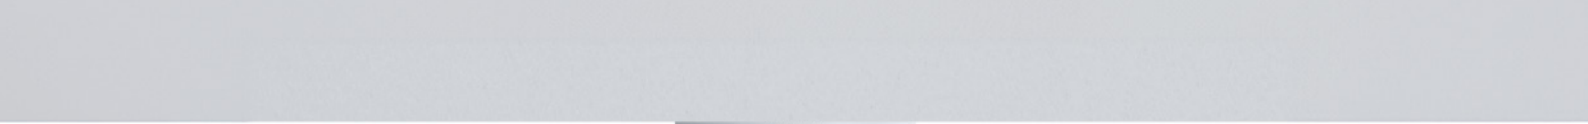


Recessed luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The base is in textured matt black or matt white painted steel. The spotlight is in polished galvanised gold, textured matt black or matt white painted aluminium and is adjustable in all directions. Luminaire designed for plasterboard ceilings. The required hole in the plasterboard is 40x40 mm. The clearance space above the plasterboard is 60 mm. A range of light control accessories is available.	The light source is LED with integrated module. The driver is integrated, with a dimmer function. The DOT R 51 version requires a GU10 LED bulb, which is not included but is available as an accessory.
Apparecchio di illuminazione da incasso, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	La base è in acciaio verniciata bianco opaco o nero opaco texturizzato. Il proiettore è in alluminio verniciato bianco opaco, nero opaco texturizzato o galvanizzato oro lucido ed è orientabile in tutte le direzioni. L'apparecchio è dedicato a soffitti in cartongesso. Il foro richiesto nel cartongesso è di 40x40 mm. Lo spazio richiesto oltre il cartongesso è di 60 mm. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato. Il driver non è incluso, ma è disponibile come accessorio. Nelle versione DOT R 51 la lampadina prevista è a LED, con attacco GU10, e non è inclusa, ma disponibile come accessorio.

Finish	.03	Matt White	.04	Matt Black
	.49	Matt Black/Polished Gold		
	Custom finish available on request. Finitura personalizzata su richiesta.			



DOT R
13W
Max 350mA DC
2700K / 3000K
CRI >97
Driver not included
CE IP20

Matt White - 2700K	1A4770300.27.20
Matt White - 3000K	1A4770300.30.20
Matt Black - 2700K	1A4770400.27.20
Matt Black - 3000K	1A4770400.30.20
Matt Black/Polished Gold - 2700K	1A4774900.27.20
Matt Black/Polished Gold - 3000K	1A4774900.30.20




DOT R 51
Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20


Matt White - ON/OFF	1A3700300.00.00
Matt Black - ON/OFF	1A3700400.00.00
Matt Black/Polished Gold - ON/OFF	1A3704900.00.00

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	DOT R	1Z0240850.350



Driver / Alimentatore			Not included
220-240V(110-127V)	350mA/18,9W(13,5W)/IP20/DALI - PUSH	DOT R	1Z0241270.350
- 1-10V			

Compulsory accessories / Accessori obbligatori

Other accessories / Altri accessori



Lens / Lente		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT R	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT R	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT R	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT R	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape		Not included	
		DOT R	1X0080400.01.00



Elliptical filter / Filtro ellittico		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.02.00



Blue filter / Filtro blu		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.03.00



Red filter / Filtro rosso		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.04.00



Yellow filter / Filtro giallo		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.05.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16			Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT R 51	1Y0330500	



LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580210	



LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580010	

Other accessories / Altri accessori



Darklight			Not included
LED SORAA - GU10 - MR16	DOT R 51	1Y1580040	



25° beam filter / Filtro fascio 25°			Not included
LED SORAA - GU10 - MR16	DOT R 51	1Y1580020	




36° beam filter / Filtro fascio 36°			Not included
LED SORAA - GU10 - MR16	DOT R 51	1Y1580030	





Recessed luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in matt grey painted aluminium. The matt black spotlight is integrated into the lamp body. D1 is only available in the trim version, with a matt black or matt white painted visible edge, and requires an installation frame. D1 is not adjustable. The luminaire is designed for plasterboard ceilings. The required hole in the plasterboard is Ø 35 mm. The clearance space above the plasterboard is 100 mm.	The light source is LED with integrated module. The electric cable is matt black and 0,3 m long. The driver is not included but is available as an accessory.
Apparecchio di illuminazione da incasso, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato grigio opaco. Il riflettore ha finitura nero opaco ed è integrato nel corpo lampada. D1 è disponibile solo nella versione trim, con bordo visibile verniciato bianco opaco o nero opaco, e necessita di un frame di installazione. D1 non è orientabile. L'apparecchio è dedicato a soffitti in cartongesso. Il foro richiesto nel cartongesso è di Ø 35 mm. Lo spazio richiesto oltre il cartongesso è di 100 mm.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 0,3 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.04 Matt Black
--------	----------------



D1 - 24°

5,5W
Max 450mA DC
2700K - 350lm / 3000K - 366lm
CRI >90
Beam 24°
UGR <19
Driver not included



Matt Black - 2700K	1A6160400.27.20
Matt Black - 3000K	1A6160400.30.20


Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione




Frame trim / Cornice trim			Not included
Matt White	Cut-out Ø 35 mm Minimum space for mounting 100 mm	1X0150300.02.00	
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 100 mm	1X0150400.02.00	


Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V(110-127V)	450mA/24,3W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.450	




Driver / Alimentatore			Not included
220-240V	450mA/20W/IP20/TRIAC/IGBT	1Z0240850.450	

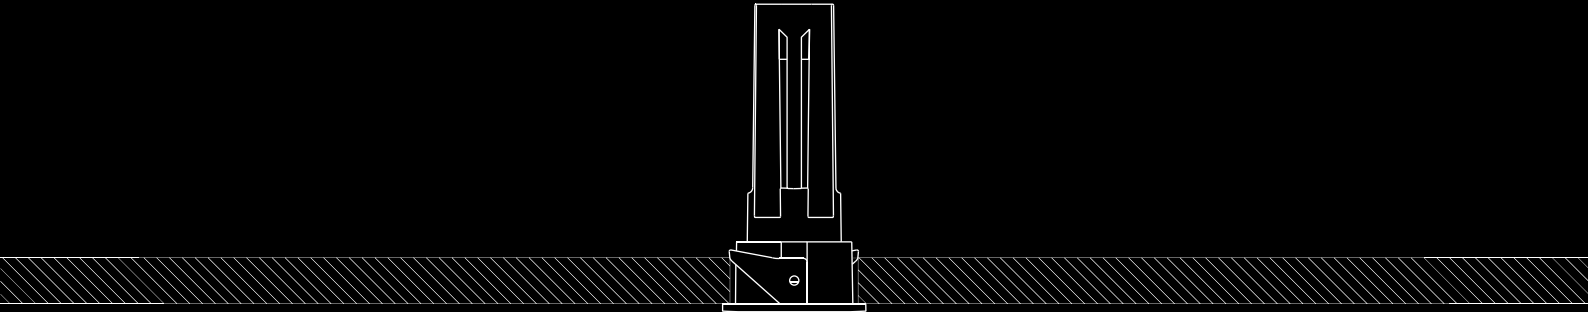

• 40 mm •




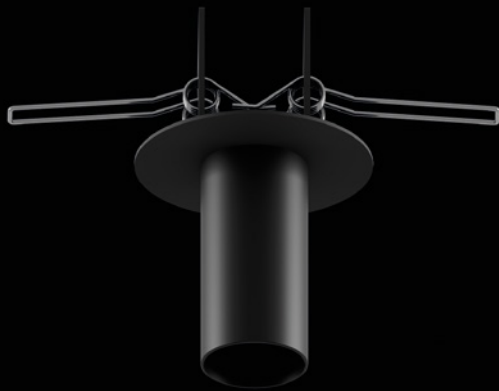Ø 35 mm



Recessed luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The cylindrical body is in polished black painted aluminium. The base is in textured matt black or textured matt white painted steel. D2 is not adjustable. The luminaire is designed for plasterboard ceilings. The required hole in the plasterboard is Ø 50 mm. The clearance space above the plasterboard is 60 mm.	The light source is LED with integrated module. The driver is not included but is available as an accessory.
Apparecchio di illuminazione da incasso, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo cilindrico è in alluminio verniciato nero lucido. La base è in acciaio verniciata bianco opaco texturizzato o nero opaco texturizzato. D2 non è orientabile. L'apparecchio è dedicato a soffitti in cartongesso. Il foro richiesto nel cartongesso è di Ø 50 mm. Lo spazio richiesto oltre il cartongesso è di 60 mm.	La sorgente luminosa è a LED e a modulo integrato. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.04 Matt Black	.34 Matt White/Black Bicolour
--------	----------------	-------------------------------




D2
6W
Max 500mA DC
2700K - 366lm / 3000K - 366lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP20


Matt Black - 2700K	1A6180400.27.20
Matt Black - 3000K	1A6180400.30.20
Matt White/Black Bicolour - 2700K	1A6183400.27.20
Matt White/Black Bicolour - 3000K	1A6183400.30.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500



Driver / Alimentatore		Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500

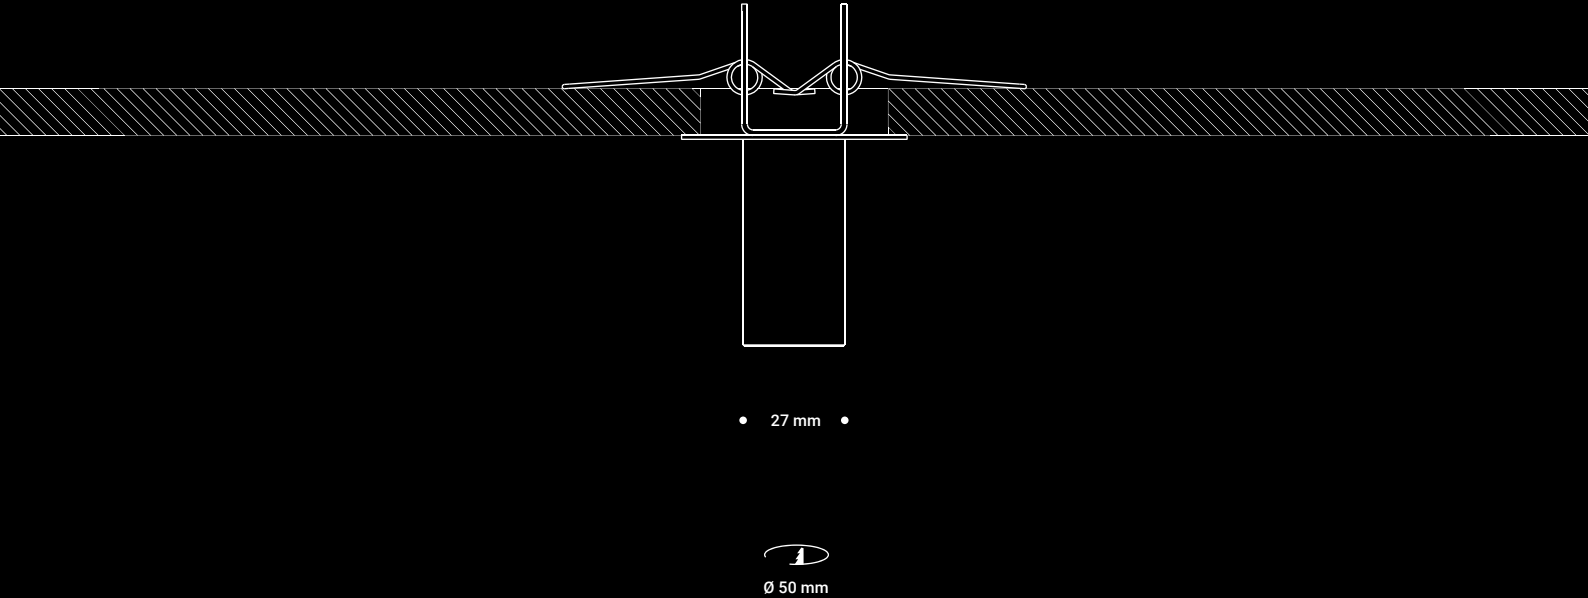


LED MODULE





HONEYCOMB LOUVRE




FRAME TRIM



FIXED / ADJUSTABLE REFLECTOR




LED MODULE





HONEYCOMB LOUVRE




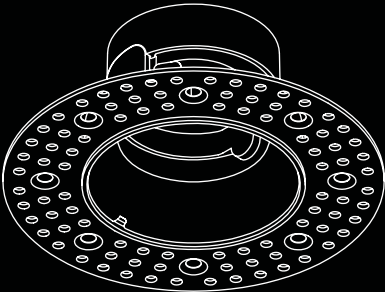FRAME TRIMLESS



FIXED / ADJUSTABLE REFLECTOR



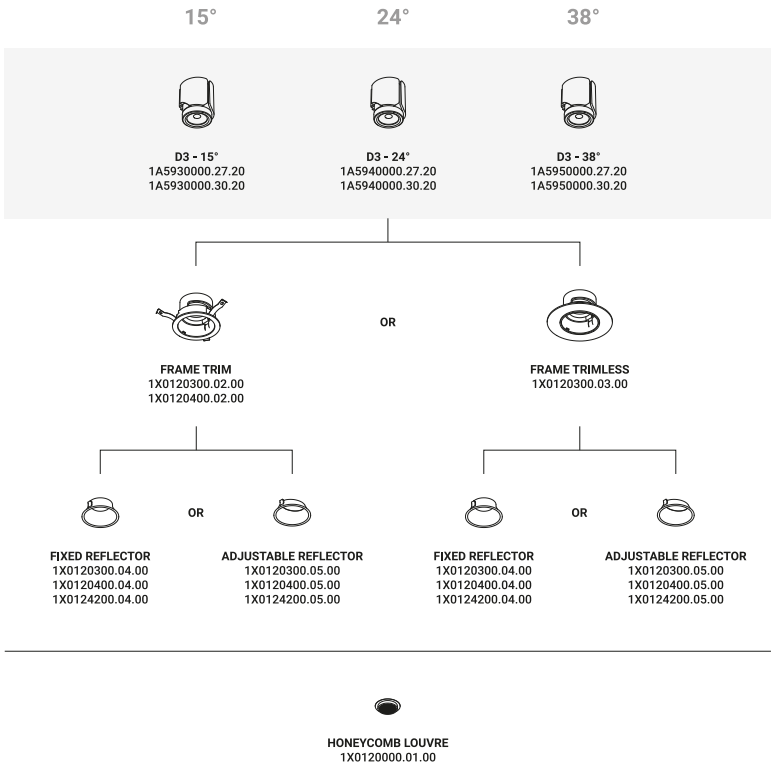



D3 - 15°
7,2W
Max 200mA DC
2700K - 391lm / 3000K - 515lm
CRI >90
Beam 15°
UGR <19
Driver not included
CE IP20

Standard - 2700K	1A5930000.27.20
Standard - 3000K	1A5930000.30.20



D3 - 24°
7,2W
Max 200mA DC
2700K - 442lm / 3000K - 583lm
CRI >90
Beam 24°
UGR <19
Driver not included
CE IP20

Standard - 2700K	1A5940000.27.20
Standard - 3000K	1A5940000.30.20




D3 - 38°
7,2W
Max 200mA DC
2700K - 477lm / 3000K - 630lm
CRI >90
Beam 38°
UGR <19
Driver not included
CE IP20


Standard - 2700K	1A5950000.27.20
Standard - 3000K	1A5950000.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Frame trim / Cornice trim			Not included
Matt White	Cut-out Ø 55 mm	1X0120300.02.00	
	Minimum space for mounting 100 mm		
Matt Black	Cut-out Ø 55 mm	1X0120400.02.00	
	Minimum space for mounting 100 mm		



Frame trimless / Cornice trimless			Not included
Matt White	Cut-out Ø 55 mm	1X0120300.03.00	
	Minimum space for mounting 100 mm		




Fixed reflector / Riflettore fisso			Not included
Matt White		1X0120300.04.00	
Matt Black		1X0120400.04.00	
Bright Black		1X0124200.04.00	




Adjustable reflector / Riflettore orientabile			Not included
Matt White		1X0120300.05.00	
Matt Black		1X0120400.05.00	
Bright Black		1X0124200.05.00	

Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V(110-127V)	200mA/10,8W(10,8W)/IP20/DALI - PUSH - 1-10V	1Z0241270.200	



Driver / Alimentatore			Not included
220-240V	200mA/8W/IP20/TRIAC/IGBT	1Z2270060.200	

Optional accessories / Accessori opzionali

Other accessories / Altri accessori






Honeycomb louvre / Frangiluce nido d'ape			Not included
Standard		1X0120000.01.00	



Recessed luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in matt grey painted aluminium. D4 is available in the trim version, with a matt black or matt white painted visible edge, and the trimless version, without trim. The luminaire requires the specific installation frame. The spotlight is available with matt white, matt black or polished black finish. The frame is available fixed, adjustable in all directions or with wallwasher function. Luminaire designed for plasterboard ceilings. The required hole in the plasterboard is Ø 75 mm. The clearance space above the plasterboard is 135 mm. A range of light control accessories is available.	The light source is LED with integrated module. The electric cable is matt black and 0,3 m long. The driver is not included but is available as an accessory.
Apparecchio di illuminazione da incasso, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato grigio opaco. D4 è disponibile nella versione trim, con il bordo visibile verniciato bianco opaco o nero opaco, e trimless, senza battuta. L'apparecchio necessita dell'apposito frame di installazione. Il riflettore è disponibile con finitura bianco opaco, nero opaco o nero lucido. Il frame è disponibile fisso, orientabile in tutte le direzioni o con funzione wall washer. L'apparecchio è dedicato a soffitti in cartongesso. Il foro richiesto nel cartongesso è di Ø 75 mm. Lo spazio richiesto oltre il cartongesso è di 135 mm. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 0,3 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.00	Standard
--------	-----	----------

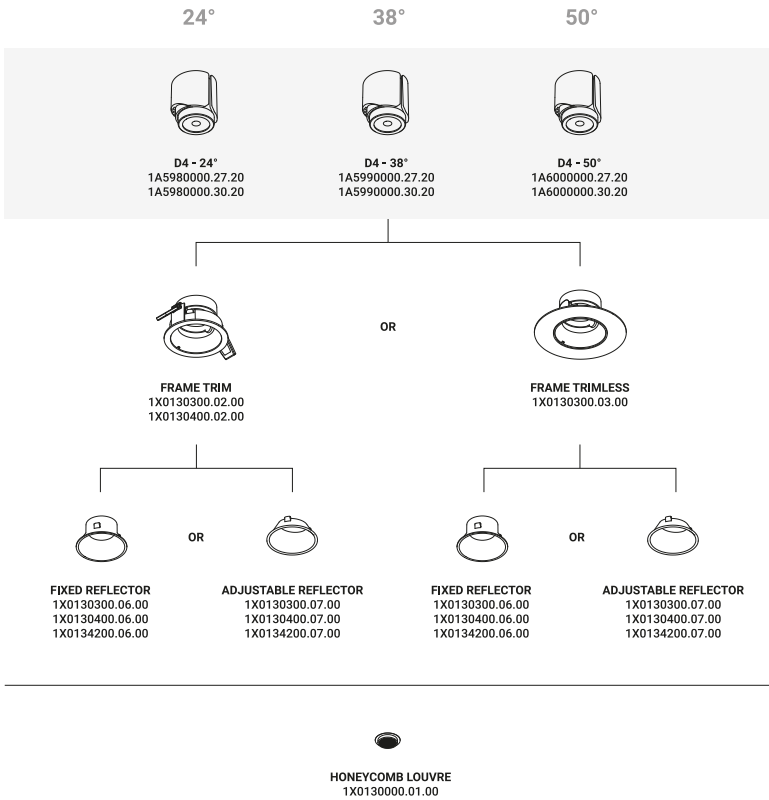

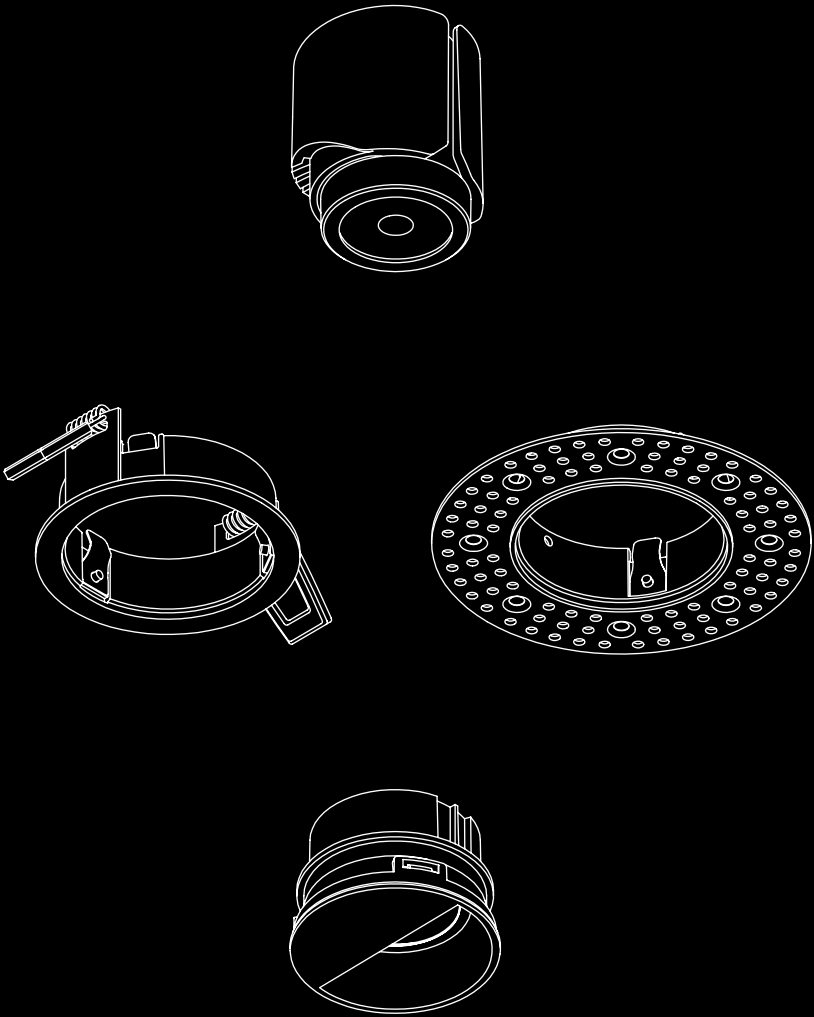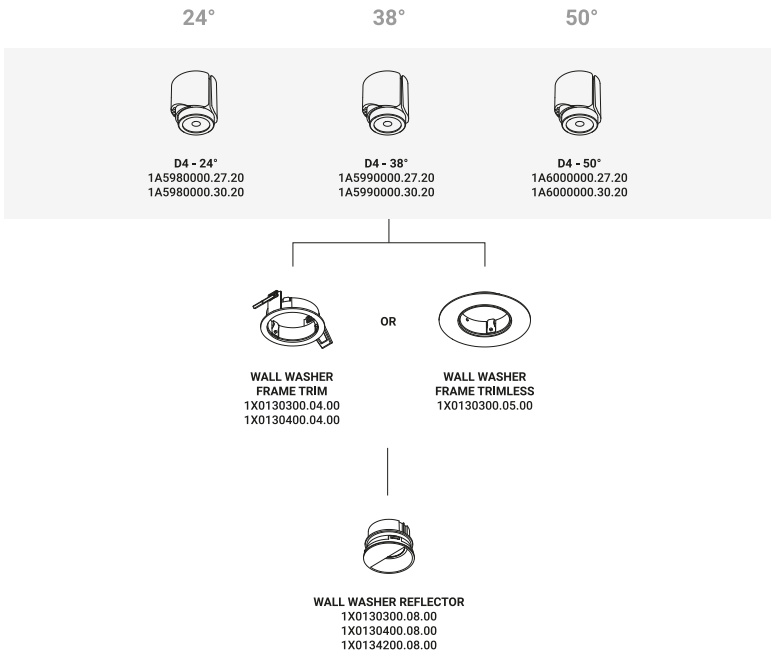

LED MODULE

FRAME
TRIM / TRIMLESS

WALL WASHER
REFLECTOR



D4 - 24°
12W
Max 350mA DC
2700K - 1184lm / 3000K - 1406lm
CRI >90
Beam 24°
UGR <19
Driver not included
CE IP20

Standard - 2700K	1A5980000.27.20
Standard - 3000K	1A5980000.30.20



D4 - 38°
12W
Max 350mA DC
2700K - 1157lm / 3000K - 1374lm
CRI >90
Beam 38°
UGR <19
Driver not included
CE IP20


Standard - 2700K	1A5990000.27.20
Standard - 3000K	1A5990000.30.20




D4 - 50°
12W
Max 350mA DC
2700K - 1110lm / 3000K - 1319lm
CRI >90
Beam 50°
UGR <19
Driver not included
CE IP20

Standard - 2700K	1A6000000.27.20
Standard - 3000K	1A6000000.30.20


Compulsory accessories / Accessori obbligatori
Installation kits / Kit d'installazione




Frame trim / Cornice trim			Not included
Matt White	Cut-out Ø 75 mm	1X0130300.02.00	
	Minimum space for mounting 135 mm		
Matt Black	Cut-out Ø 75 mm	1X0130400.02.00	
	Minimum space for mounting 135 mm		




Frame trimless / Cornice trimless			Not included
Matt White	Cut-out Ø 75 mm	1X0130300.03.00	
	Minimum space for mounting 135 mm		




Wall washer frame trim / Cornice wall washer trim			Not included
Matt White	Cut-out Ø 75 mm	1X0130300.04.00	
	Minimum space for mounting 135 mm		
Matt Black	Cut-out Ø 75 mm	1X0130400.04.00	
	Minimum space for mounting 135 mm		




Wall washer frame trimless / Cornice wall washer trimless			Not included
Matt White	Cut-out Ø 75 mm	1X0130300.05.00	
	Minimum space for mounting 135 mm		



Fixed reflector / Riflettore fisso			Not included
Matt White			1X0130300.06.00
Matt Black			1X0130400.06.00
Bright Black			1X0134200.06.00




Adjustable reflector / Riflettore orientabile			Not included
Matt White			1X0130300.07.00
Matt Black			1X0130400.07.00
Bright Black			1X0134200.07.00




Wall washer reflector / Riflettore wall washer			Not included
Matt White			1X0130300.08.00
Matt Black			1X0130400.08.00
Bright Black			1X0134200.08.00

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(110-127V)	350mA/18,9W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.350




Driver / Alimentatore		Not included
220-240V	350mA/14W/IP20/TRIAC/IGBT	1Z2270060.350

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Honeycomb louvre / Frangiluce nido d'ape		Not included
Standard		1X0130000.01.00


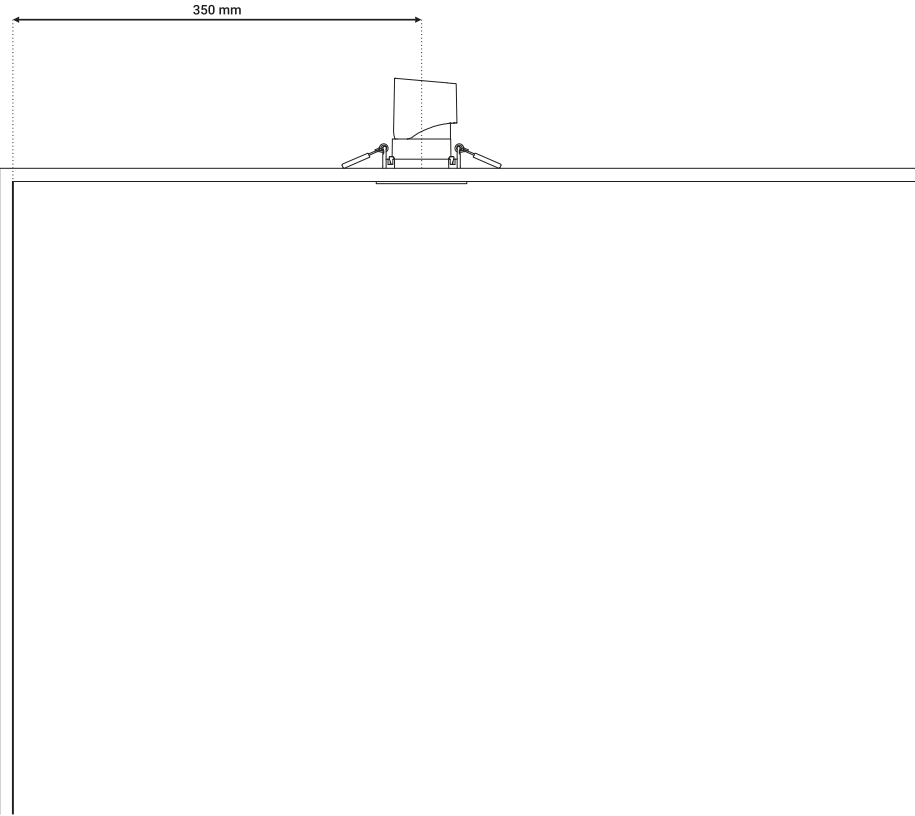



Suggested installation with wall washer frame



Recessed luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in matt grey painted aluminium. D5 is available in the trim version, with a matt black or matt white painted visible edge, and the trimless version, without trim. The luminaire requires the specific installation frame. The spotlight is available with matt white, matt black or polished black finish. The frame is available fixed or adjustable in all directions. Luminaire designed for plasterboard ceilings. The required hole in the plasterboard is Ø 100 mm. The clearance space above the plasterboard is 160 mm. A range of light control accessories is available.	The light source is LED with integrated module. The electric cable is matt black and 0,3 m long. The driver is not included but is available as an accessory.
Apparecchio di illuminazione da incasso, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato grigio opaco. D5 è disponibile nella versione trim, con il bordo visibile verniciato bianco opaco o nero opaco, e trimless, senza battuta. L'apparecchio necessita dell'apposito frame di installazione. Il riflettore è disponibile con finitura bianco opaco, nero opaco o nero lucido. Il frame è disponibile fisso o orientabile in tutte le direzioni. L'apparecchio è dedicato a soffitti in cartongesso. Il foro richiesto nel cartongesso è di Ø 100 mm. Lo spazio richiesto oltre il cartongesso è di 160 mm. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 0,3 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio.


Finish	.00	Standard
--------	-----	----------

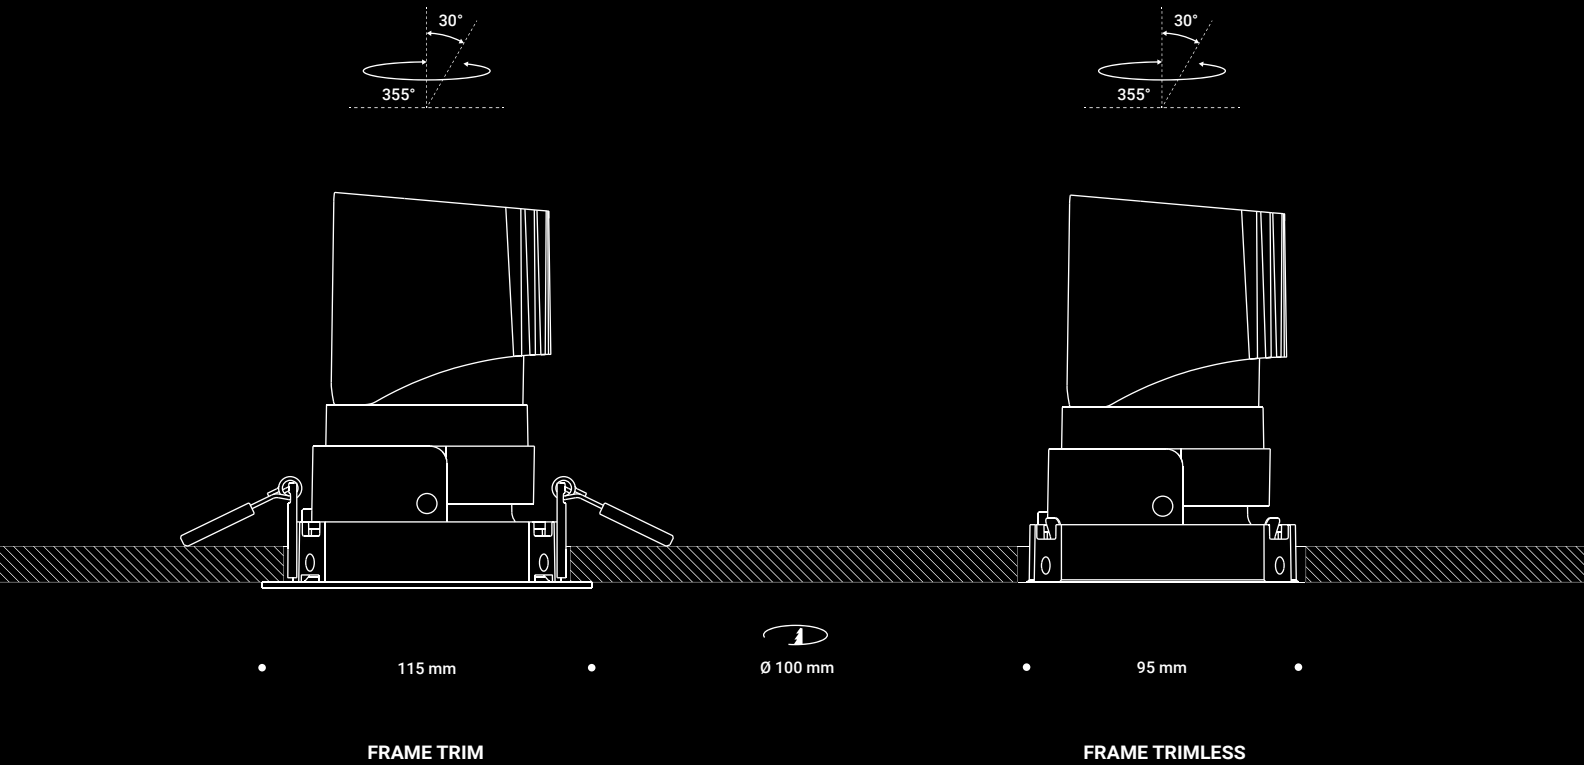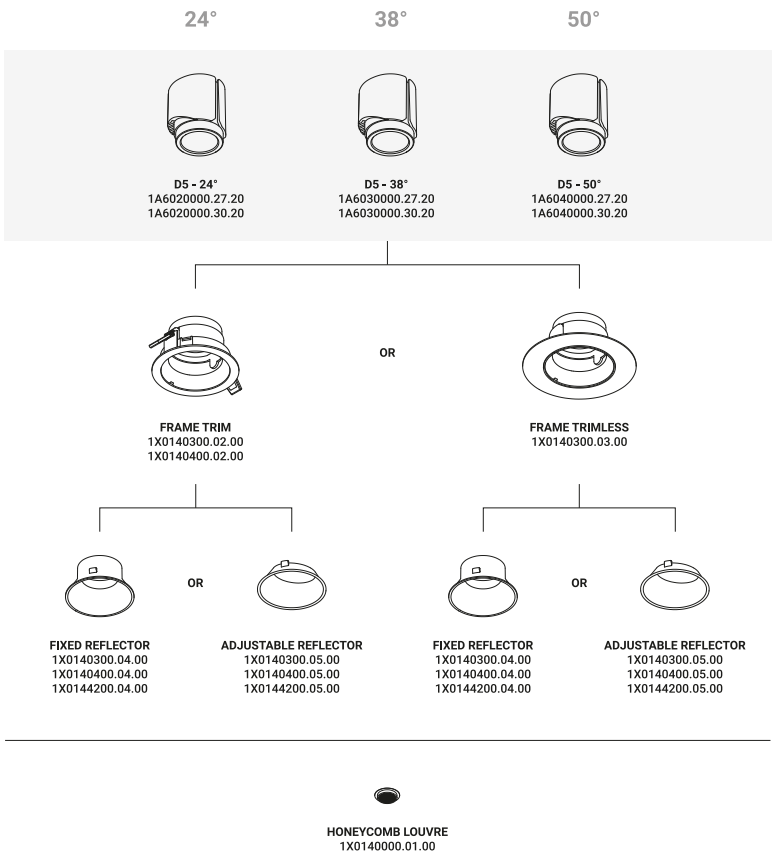




D5 - 24°
21,2W
Max 600mA DC
2700K - 1808lm / 3000K - 2289lm
CRI >90
Beam 24°
UGR <19
Driver not included
CE IP20

Standard - 2700K	1A6020000.27.20
Standard - 3000K	1A6020000.30.20



D5 - 38°
21,2W
Max 600mA DC
2700K - 1804lm / 3000K - 2284lm
CRI >90
Beam 38°
UGR <19
Driver not included
CE IP20

Standard - 2700K	1A6030000.27.20
Standard - 3000K	1A6030000.30.20




D5 - 50°
21,2W
Max 600mA DC
2700K - 1764lm / 3000K - 2234lm
CRI >90
Beam 50°
UGR <19
Driver not included
CE IP20


Standard - 2700K	1A6040000.27.20
Standard - 3000K	1A6040000.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Frame trim / Cornice trim		Not included
Matt White	Cut-out Ø 100 mm Minimum space for mounting 160 mm	1X0140300.02.00
Matt Black	Cut-out Ø 100 mm Minimum space for mounting 160 mm	1X0140400.02.00



Frame trimless / Cornice trimless		Not included
Matt White	Cut-out Ø 100 mm Minimum space for mounting 160 mm	1X0140300.03.00




Fixed reflector / Riflettore fisso		Not included
Matt White		1X0140300.04.00
Matt Black		1X0140400.04.00
Bright Black		1X0144200.04.00




Adjustable reflector / Riflettore orientabile		Not included
Matt White		1X0140300.05.00
Matt Black		1X0140400.05.00
Bright Black		1X0144200.05.00

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(110-127V)	600mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.600



Driver / Alimentatore		Not included
220-240V	600mA/30W/IP20/TRIAC/IGBT	1Z2270050.600

Optional accessories / Accessori opzionali

Other accessories / Altri accessori




Honeycomb louvre / Frangiluce nido d'ape		Not included
Standard		1X0140000.01.00



Recessed luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in matt grey painted aluminium. The hemispherical lens is in transparent methacrylate and the edge is in matt black anodised aluminium. D6 is not adjustable. Luminaire designed for plasterboard ceilings. The required hole in the plasterboard is Ø 75 mm. The clearance space above the plasterboard is 135 mm.	The light source is LED with integrated module. The electric cable is matt black and 0,3 m long. The driver is not included but is available as an accessory.
Apparecchio di illuminazione da incasso, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato grigio opaco. La lente emisferica è in metacrilato trasparente e il bordo in alluminio anodizzato nero opaco. D6 non è orientabile. L'apparecchio è dedicato a soffitti in cartongesso. Il foro richiesto nel cartongesso è di Ø 75 mm. Lo spazio richiesto oltre il cartongesso è di 135 mm.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 0,3 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.04 Matt Black
--------	----------------




D6
12W
Max 350mA DC
2700K - 828lm / 3000K - 984lm
CRI >90
Driver not included
CE IP20/IP44


Matt Black - 2700K	1A6170400.27.20
Matt Black - 3000K	1A6170400.30.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver / Alimentatore			Not included
220-240V(110-127V)	350mA/18,9W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.350	



Driver / Alimentatore			Not included
220-240V	350mA/14W/IP20/TRIAC/IGBT	1Z2270060.350	

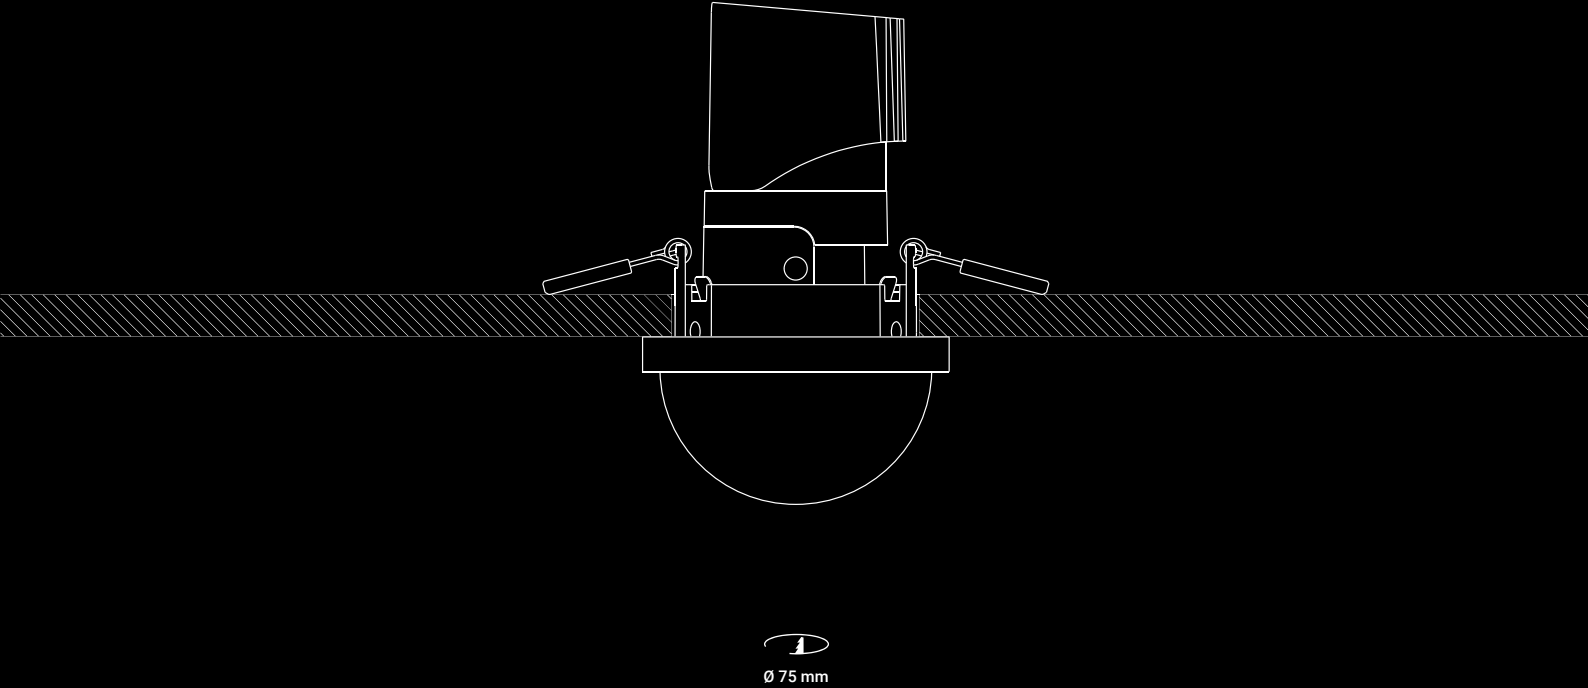



Recessed luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in matt black painted steel. The spotlight is in matt grey painted aluminium. The luminaire requires the specific installation frame. D7 is adjustable in all directions. Luminaire designed for plasterboard ceilings. The required hole in the plasterboard is 105x105 mm. The clearance space above the plasterboard is 130 mm. A range of light control accessories is available.	The light source is LED with integrated module. The electric cable is matt black and 0,3 m long. The driver is not included but is available as an accessory.
Apparecchio di illuminazione da incasso, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in acciaio verniciato nero opaco. Il proiettore è in alluminio verniciato grigio opaco. L'apparecchio necessita dell'apposito frame di installazione. D7 è orientabile in tutte le direzioni. L'apparecchio è dedicato a soffitti in cartongesso. Il foro richiesto nel cartongesso è di 105x105 mm. Lo spazio richiesto oltre il cartongesso è di 130 mm. Sono disponibili diversi accessori per il controllo della luce.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 0,3 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio.



D7 - 24°
12W
Max 350mA DC
2700K - 1184lm / 3000K - 1406lm
CRI >90
Beam 24°
Driver not included
CE IP20

Matt Black - 2700K	1A6220400.27.20
Matt Black - 3000K	1A6220400.30.20



D7 - 38°
12W
Max 350mA DC
2700K - 1157lm / 3000K - 1374lm
CRI >90
Beam 38°
Driver not included
CE IP20

Matt Black - 2700K	1A6230400.27.20
Matt Black - 3000K	1A6230400.30.20



D7 - 50°
12W
Max 350mA DC
2700K - 1110lm / 3000K - 1319lm
CRI >90
Beam 50°
Driver not included
CE IP20

Matt Black - 2700K	1A6240400.27.20
Matt Black - 3000K	1A6240400.30.20


Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione




Plasterboard frame 12,5 mm / Cornice per cartongesso 12,5 mm			Not included
Matt White	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500300.00.00	
Matt Black	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500400.00.00	

Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V(110-127V)	350mA/18,9W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.350	




Driver / Alimentatore			Not included
220-240V	350mA/14W/IP20/TRIAC/IGBT	1Z2270060.350	

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Honeycomb louvre / Frangiluce nido d'ape			Not included
Standard		1X0130000.01.00	

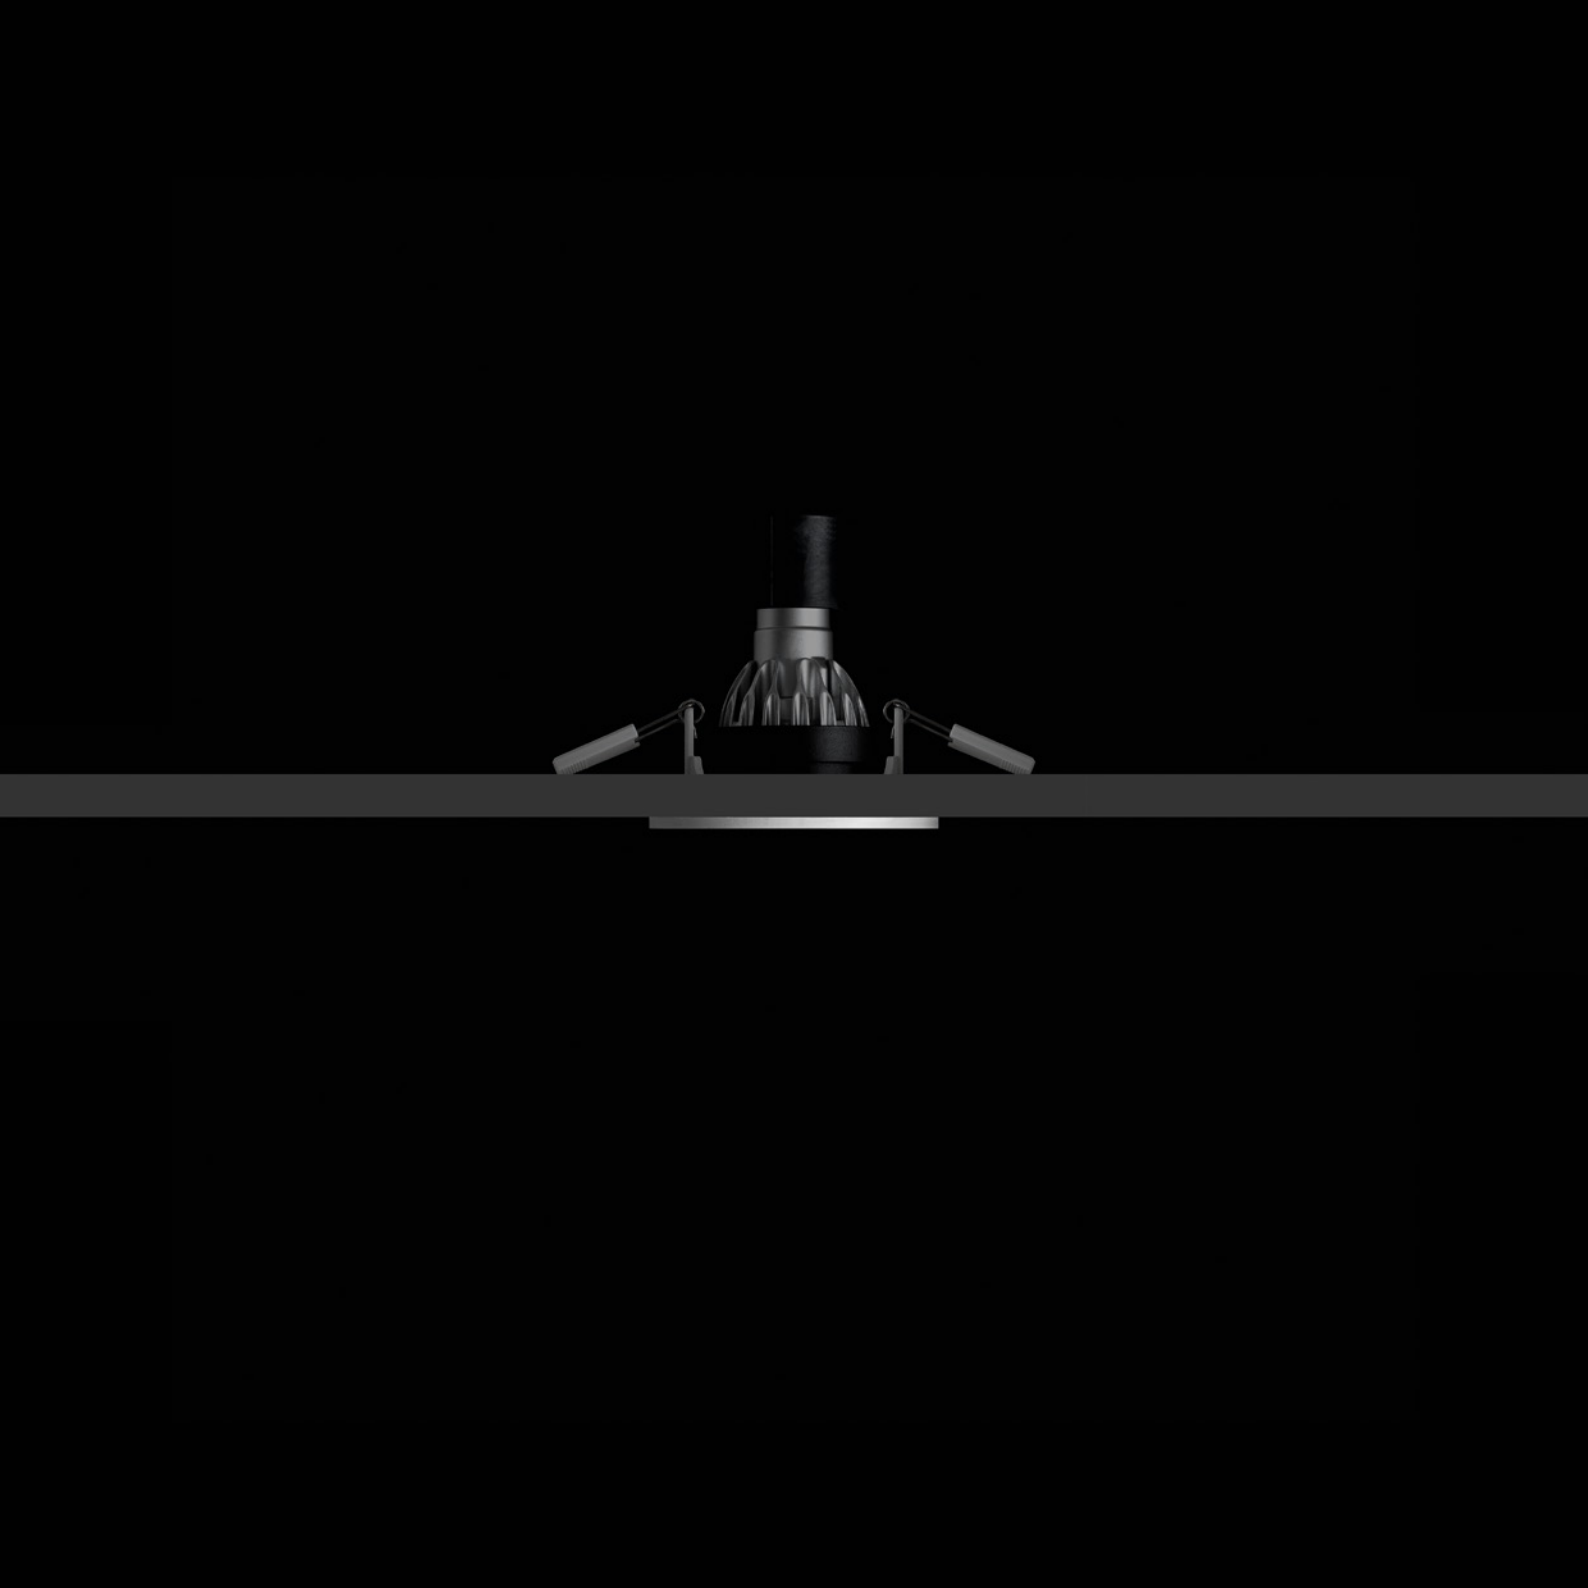

Recessed luminaire with direct light for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in textured matt white painted aluminium. D9 is adjustable in all directions. Luminaire designed for plasterboard ceilings. The required hole in the plasterboard is Ø 75 mm. The clearance space above the plasterboard is 110 mm.	It requires an GU10 LED bulb, which is not included but is available as an accessory.
Apparecchio di illuminazione da incasso, a luce diretta, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato bianco opaco texturizzato. D9 è orientabile in tutte le direzioni. L'apparecchio è dedicato a soffitti in cartongesso. Il foro richiesto nel cartongesso è di Ø 75 mm. Lo spazio richiesto oltre il cartongesso è di 110 mm.	La lampadina prevista è a LED, con attacco GU10, e non è inclusa, ma disponibile come accessorio.

Finish	.03 Matt White
--------	-------------------



D9
Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Matt White - ON/OFF	1A6140300.00.00
---------------------	-----------------

Optional accessories / Accessori opzionali

Bulbs / Lampadine




LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500



LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210



LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010

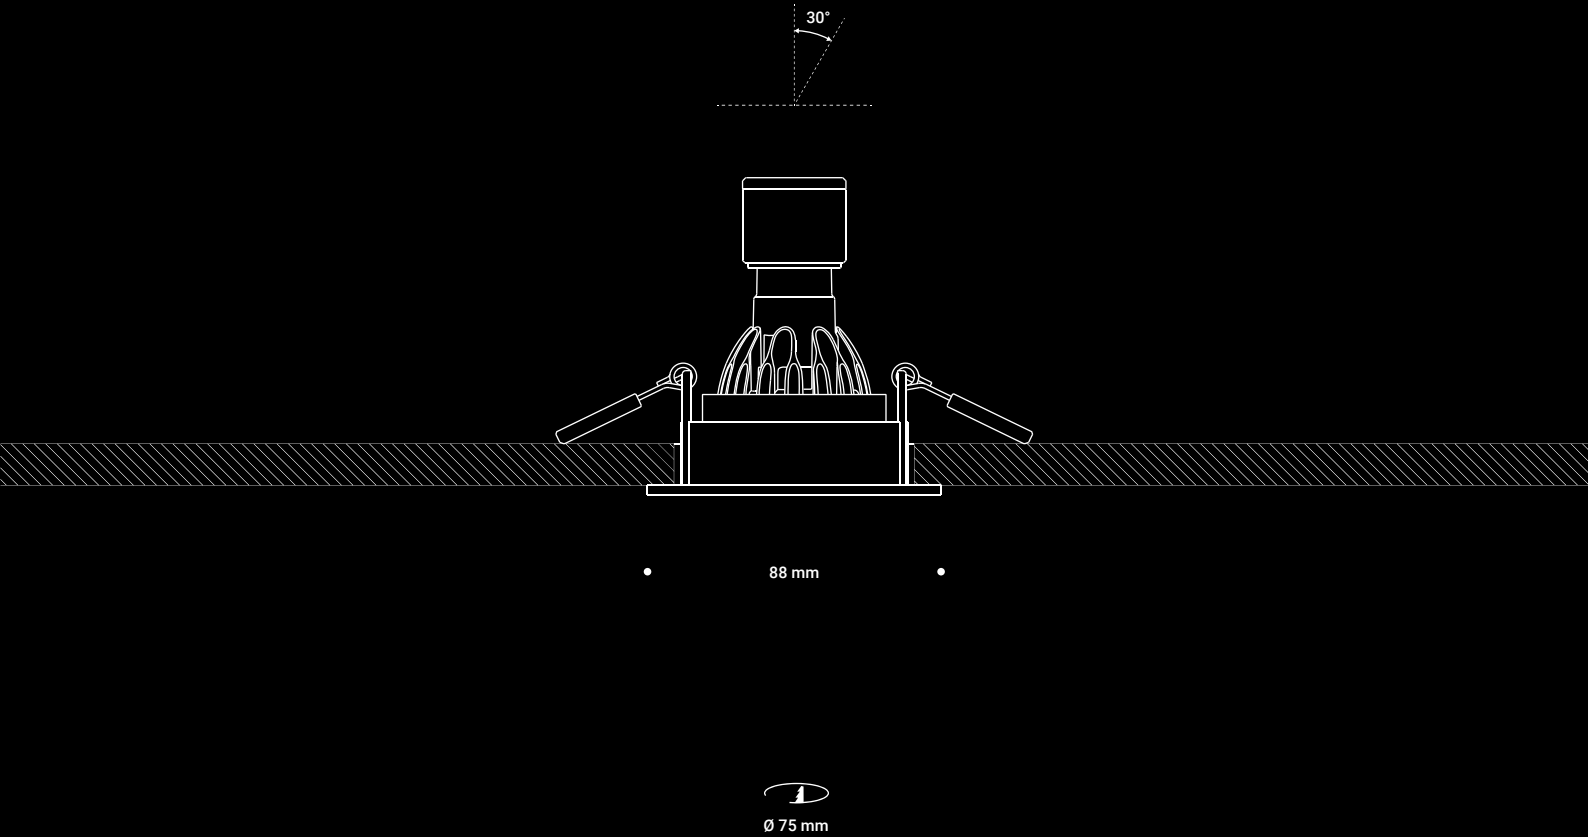

The SISTEMI collection represents a revolution architectural spaces and design: it freely carries light everywhere, without any electrical limitations, paving new ways for expression and construction. A set of integrated, modular solutions where light runs on digital tracks, thin wires, flexible tapes and 3D circuits. It is a light that draws, hints, accompanies - never the protagonist, always a silent and poetic presence. Compatible light projects, SISTEMI is a new way of thinking lighting: no longer objects that contain light, but spaces that become light. ENDLESS, INFINITO, FLASH, OHM, TRATTO.

La collezione SISTEMI rappresenta una rivoluzione per lo spazio e per il progetto architettonico: permette di portare la luce ovunque, liberamente, senza essere vincolati all'impianto elettrico, aprendo nuove possibilità espressive e costruttive. È un insieme di soluzioni integrate e modulabili, dove la luce corre su binari digitali, fili sottili, nastri flessibili o circuiti tridimensionali. È una luce che disegna, accenna, accompagna - mai protagonista, ma presenza silenziosa e poetica. Progetti di luce compatibili tra loro, SISTEMI rappresenta un modo nuovo di pensare l'illuminazione: non più oggetti che contengono luce, ma spazi che diventano luce. ENDLESS, INFINITO, FLASH, OHM, TRATTO.


SYSTEMS / SISTEMI




Wall lighting system with indirect light for indoor use.	INFINITO is a spatial concept. An ultra-thin tape cuts through the space producing an indirect light. INFINITO breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light.	The tape is in AISI 301 stainless steel, is 18 mm wide and can be extended up to 36 m in length (standard measurements 6 / 12 / 18 m). The adhesive covering tape is in matt black PVC. The tensioners are in matt black anodised aluminium. The TW version is available in 5 / 10 m lenghts.	The light source is an 8 mm wide LED strip. The driver is not included but is available as an accessory.
Sistema di illuminazione da parete, a luce indiretta, per interni.	INFINITO è un concetto spaziale. Un nastro sottilissimo taglia lo spazio e produce luce indiretta. INFINITO smaterializza l'oggetto lampada, trasformandolo in qualcos'altro, lasciandone solo una traccia, una riga e poi nemmeno più quella, solo la luce.	Il nastro è in AISI 301, è largo 18 mm e può essere teso fino a 36 m di lunghezza (misure standard 6 / 12 / 18 m). Il nastro adesivo di copertura è in PVC nero opaco. I tenditori sono in alluminio anodizzati nero opaco. La versione TW è disponibile da 5 / 10 m di lunghezza.	La sorgente luminosa è costituita da una strip LED di 8 mm di larghezza. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.03 Matt White	.04 Matt Black
	 Custom finish available on request (wall connection and installation kits only). Finitura personalizzata su richiesta (solo per attacco da parete e kit di installazione).	


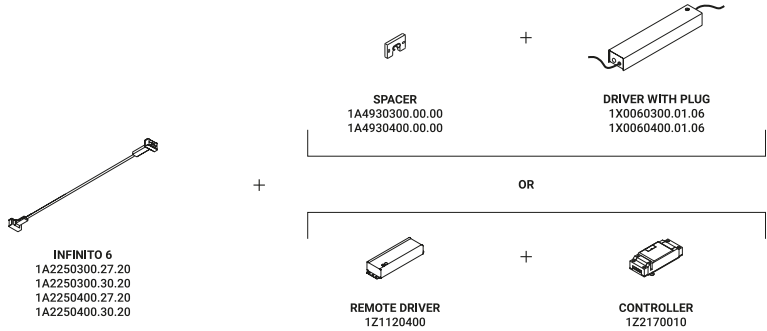
INFINITO 6



INFINITO 12

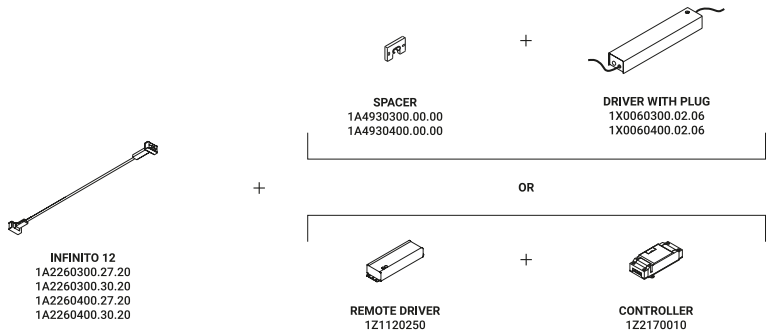


INFINITO 18

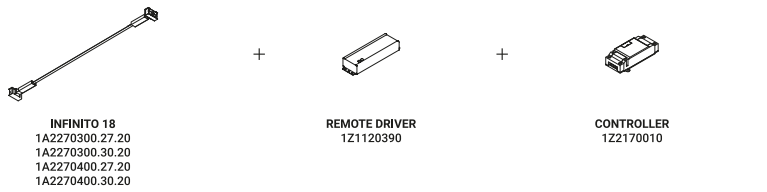


INFINITO 6
55W - 1,43A
48V DC
2700K - 7494lm / 3000K - 7668lm
CRI >90
Driver not included
CE IP20 E

Matt White - 2700K	1A2250300.27.20
Matt White - 3000K	1A2250300.30.20
Matt Black - 2700K	1A2250400.27.20
Matt Black - 3000K	1A2250400.30.20



INFINITO 12
110W - 2,86A
48V DC
2700K - 14988lm / 3000K - 15336lm
CRI >90
Driver not included
CE IP20 E


Matt White - 2700K	1A2260300.27.20
Matt White - 3000K	1A2260300.30.20
Matt Black - 2700K	1A2260400.27.20
Matt Black - 3000K	1A2260400.30.20





INFINITO 18
165W
48V DC
2700K - 22482lm / 3000K - 23004lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K	1A2270300.27.20
Matt White - 3000K	1A2270300.30.20
Matt Black - 2700K	1A2270400.27.20
Matt Black - 3000K	1A2270400.30.20

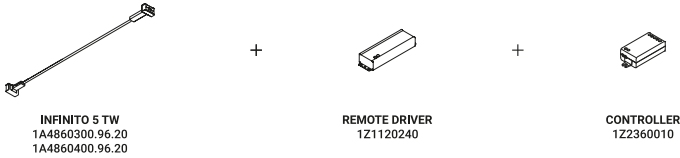INFINITO 5 TW




INFINITO 10 TW

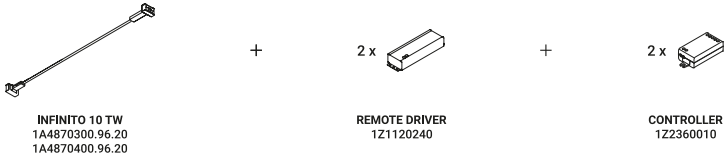

INFINITO 5 TW
Tunable White
96W
24V DC
2700K - 4690lm / 6500K - 5190lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K	1A4860300.96.20
Matt Black - 2700K / 6500K	1A4860400.96.20




INFINITO 10 TW
Tunable White
192W
24V DC
2700K - 9380lm / 6500K - 10380lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K / 6500K	1A4870300.96.20
Matt Black - 2700K / 6500K	1A4870400.96.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	INFINITO 6	1X0060300.01.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	INFINITO 6	1X0060400.01.06	




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	INFINITO 12	1X0060300.02.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	INFINITO 12	1X0060400.02.06	




Driver / Alimentatore				Not included
100-240V	48V/80W/IP67/1-10V	INFINITO 6	1Z1120400	



Driver / Alimentatore				Not included
100-240V	48V/150W/IP67/1-10V	INFINITO 12	1Z1120250	




Driver / Alimentatore				Not included
100-240V	48V/240W/IP67/1-10V	INFINITO 18	1Z1120390	




Driver / Alimentatore				Not included
100-240V	24V/120W/IP67/1-10V	INFINITO 5 TW / INFINITO 10 TW	1Z1120240	

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Controller				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	INFINITO 6 / INFINITO 12 / INFINITO 18	1Z2170010	




Controller Casambi - Tunable White				Not included
		INFINITO 5 TW / INFINITO 10 TW	1Z2360010	

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione




Spacer / Distanziale				Not included
Matt White	For driver kit with plug	INFINITO 6 / INFINITO 12	1A4930300.00.00	
Matt Black	For driver kit with plug	INFINITO 6 / INFINITO 12	1A4930400.00.00	




Ceiling installation kit / Kit d'installazione da soffitto				Not included
Matt White			1A0080300.00.00	
Matt Black			1A0080400.00.00	



Kit wall connection vertical sloped 45° / Kit attacco da parete per inclinazione verticale 45°				Not included
Matt White			1A0120300.00.00	
Matt Black			1A0120400.00.00	




Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro				Not included
Matt White			1A0340300.00.00	
Matt Black			1A0340400.00.00	




Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro				Not included
Matt White			1A0350300.00.00	
Matt Black			1A0350400.00.00	



Swallows / Rondini				Not included
Matt Black			1A0290400.00.00	

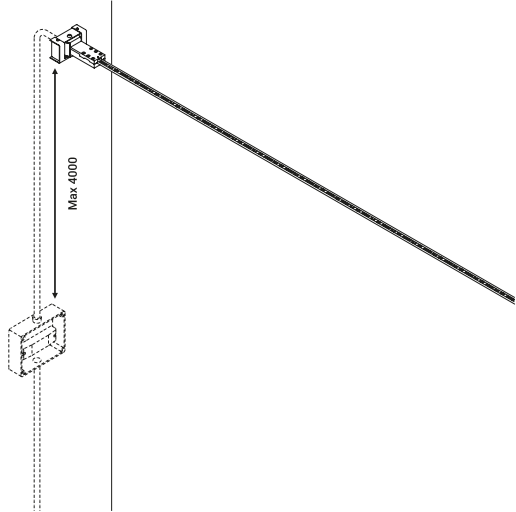


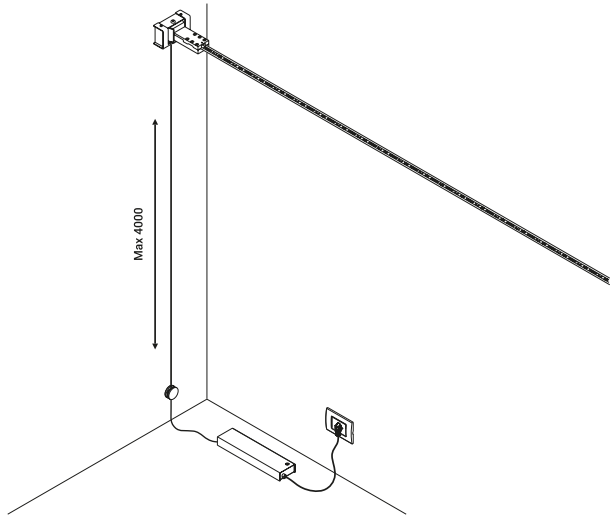Example of installation with remote driver




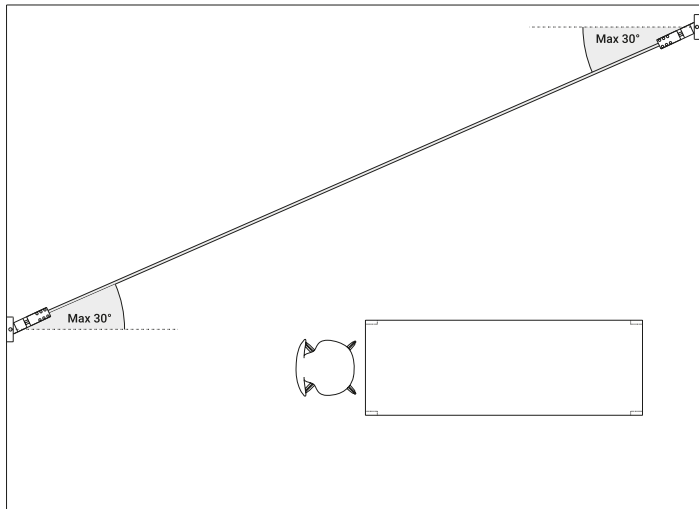Example of installation with driver with plug






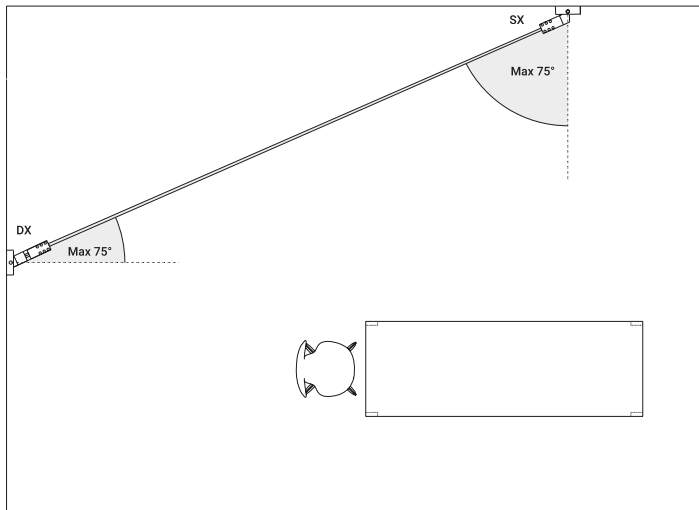
Example of installation with max rotation 30°



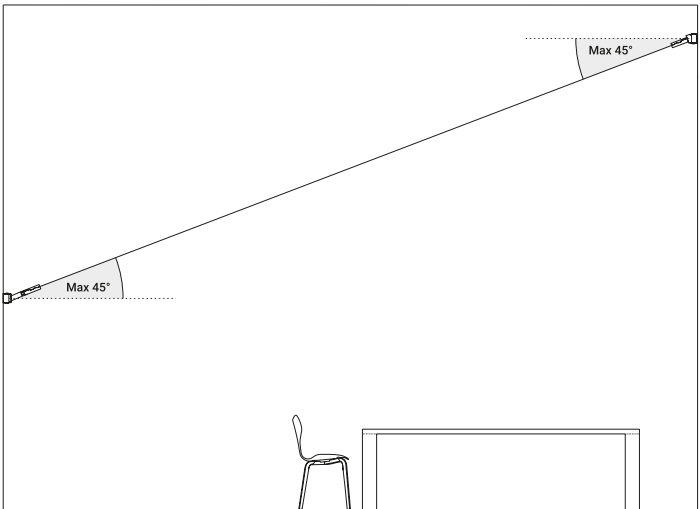1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°



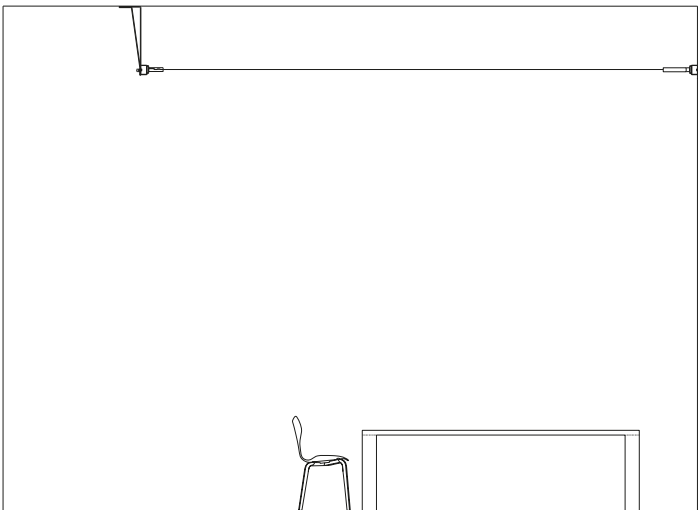1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°



1A0080400.00.00 - Example of installation with ceiling installation kit



Wall lighting system with direct light for indoor use.	FLASH is our INFINITO turned around, but with the light flowing downwards. The name pays homage to the legendary cartoon hero. Who can run seven times the speed of light...	The tape is in AISI 301 stainless steel, is 9 mm wide and can be extended up to 36 m in length (standard measurements 6 / 12 / 18 m). The tensioners are in matt black anodised aluminium. The TW version is available in 5 / 10 m lengths. All versions are dual emission.	The light source is an 8 mm wide LED strip. The driver is not included but is available as an accessory.
Sistema di illuminazione da parete, a luce diretta, per interni.	FLASH è la declinazione del nostro modello INFINITO, ma con la luce diretta verso il basso. Il nome è un omaggio al leggendario supereroe dei fumetti. Famoso perché corre sette volte più veloce della luce...	Il nastro è in AISI 301, è largo 9 mm e può essere teso fino a 36 m di lunghezza (misure standard 6 / 12 / 18 m). I tenditori sono in alluminio anodizzati nero opaco. La versione TW è disponibile da 5 / 10 m di lunghezza. Tutte le versioni sono disponibili in doppia emissione.	La sorgente luminosa è costituita da una strip LED di 8 mm di larghezza. Il driver non è incluso, ma è disponibile come accessorio.

Finish


.03 Matt White

.04 Matt Black




Custom finish available on request (wall connection and installation kits only).
Finitura personalizzata su richiesta (solo per attacco da parete e kit di installazione).


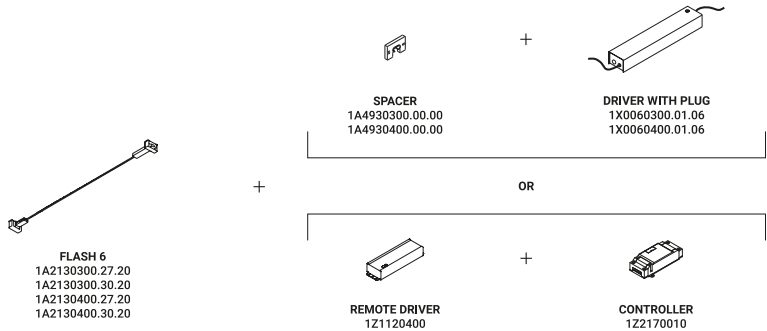
FLASH 6



FLASH 12

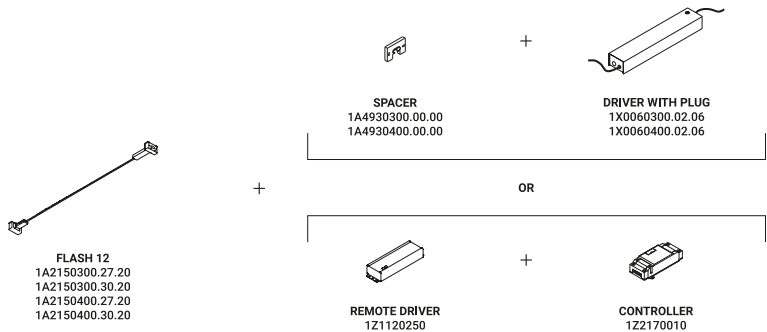


FLASH 18

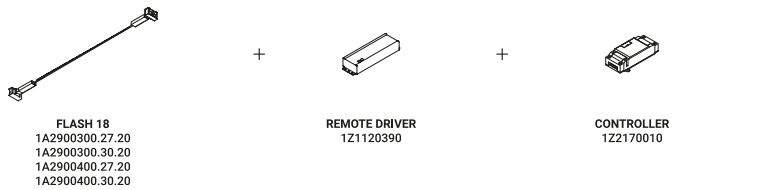


FLASH 6
55W - 1,43A
48V DC
2700K - 7494lm / 3000K - 7668lm
CRI >90
Driver not included
CE IP20 ENEC

Matt White - 2700K	1A2130300.27.20
Matt White - 3000K	1A2130300.30.20
Matt Black - 2700K	1A2130400.27.20
Matt Black - 3000K	1A2130400.30.20



FLASH 12
110W - 2,86A
48V DC
2700K - 14988lm / 3000K - 15336lm
CRI >90
Driver not included
CE IP20 ENEC


Matt White - 2700K	1A2150300.27.20
Matt White - 3000K	1A2150300.30.20
Matt Black - 2700K	1A2150400.27.20
Matt Black - 3000K	1A2150400.30.20




FLASH 18
165W
48V DC
2700K - 22482lm / 3000K - 23004lm
CRI >90
Driver not included
CE IP20 ENEC

Matt White - 2700K	1A2900300.27.20
Matt White - 3000K	1A2900300.30.20
Matt Black - 2700K	1A2900400.27.20
Matt Black - 3000K	1A2900400.30.20


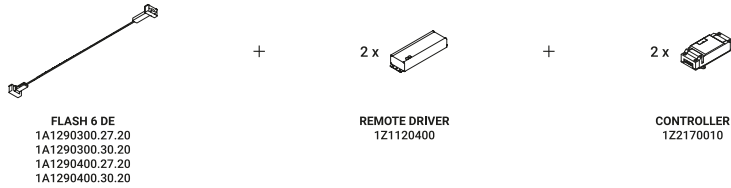
FLASH 6 DE



FLASH 12 DE

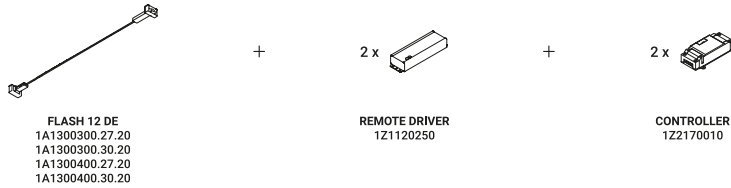


FLASH 18 DE

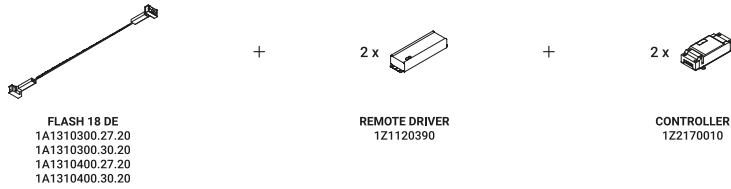


FLASH 6 DE
Dual emission
110W
48V DC
2700K - Up 7494lm - Down 7494lm /
3000K - Up 7688lm - Down 7688lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K	1A1290300.27.20
Matt White - 3000K	1A1290300.30.20
Matt Black - 2700K	1A1290400.27.20
Matt Black - 3000K	1A1290400.30.20



FLASH 12 DE
Dual emssion
220W
48V DC
2700K - Up 14988lm - Down 14988lm /
3000K - Up 15366lm - Down 15366lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K	1A1300300.27.20
Matt White - 3000K	1A1300300.30.20
Matt Black - 2700K	1A1300400.27.20
Matt Black - 3000K	1A1300400.30.20





FLASH 18 DE
Dual emission
330W
48V DC
2700K - Up 22482lm - Down 22482lm /
3000K - Up 23004lm - Down 23004lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K	1A1310300.27.20
Matt White - 3000K	1A1310300.30.20
Matt Black - 2700K	1A1310400.27.20
Matt Black - 3000K	1A1310400.30.20

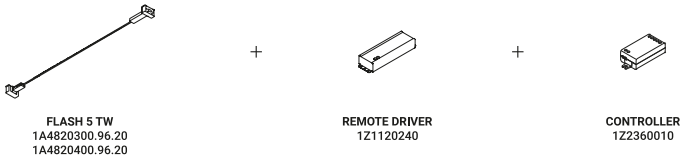FLASH 5 TW




FLASH 10 TW

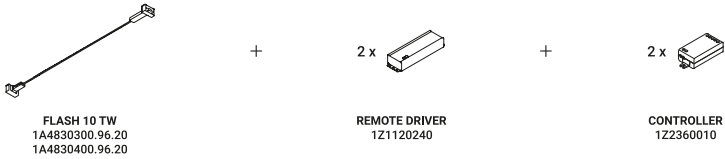

FLASH 5 TW
Tunable White
96W
24V DC
2700K - 4690lm / 6500K - 5190lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K / 6500K	1A4820300.96.20
Matt Black - 2700K / 6500K	1A4820400.96.20





FLASH 10 TW
Tunable White
192W
24V DC
2700K - 9380lm / 6500K - 10380lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K	1A4830300.96.20
Matt Black - 2700K / 6500K	1A4830400.96.20

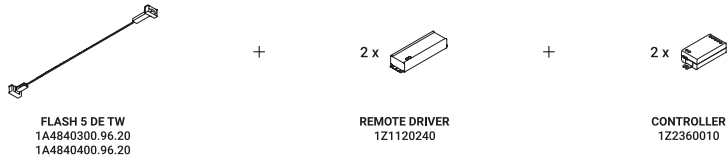FLASH 5 DE TW




FLASH 10 DE TW

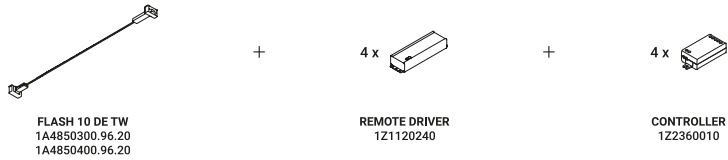

FLASH 5 DE TW
Dual emission - Tunable White
192W
24V DC
2700K - 9380lm / 6500K - 10380lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K	1A4840300.96.20
Matt Black - 2700K / 6500K	1A4840400.96.20




FLASH 10 DE TW
Dual emission - Tunable White
384W
24V DC
2700K - 18760lm / 6500K - 20760lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K / 6500K	1A4850300.96.20
Matt Black - 2700K / 6500K	1A4850400.96.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	FLASH 6	1X0060300.01.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	FLASH 6	1X0060400.01.06	




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	FLASH 12	1X0060300.02.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	FLASH 12	1X0060400.02.06	




Driver / Alimentatore				Not included
100-240V	48V/80W/IP67/1-10V	FLASH 6 / FLASH 6 DE	1Z1120400	



Driver / Alimentatore				Not included
100-240V	48V/150W/IP67/1-10V	FLASH 12 / FLASH 12 DE	1Z1120250	




Driver / Alimentatore				Not included
100-240V	48V/240W/IP67/1-10V	FLASH 18 / FLASH 18 DE	1Z1120390	




Driver / Alimentatore				Not included
100-240V	24V/120W/IP67/1-10V	FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z1120240	

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Controller				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 18 DE	1Z2170010	




Controller Casambi - Tunable White				Not included
		FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z2360010	

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione




Spacer / Distanziale				Not included
Matt White	For driver kit with plug	FLASH 6 / FLASH 12	1A4930300.00.00	
Matt Black	For driver kit with plug	FLASH 6 / FLASH 12	1A4930400.00.00	




Ceiling installation kit / Kit d'installazione da soffitto				Not included
Matt White			1A0080300.00.00	
Matt Black			1A0080400.00.00	



Kit wall connection vertical sloped 45° / Kit attacco da parete per inclinazione verticale 45°				Not included
Matt White			1A0120300.00.00	
Matt Black			1A0120400.00.00	




Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro				Not included
Matt White			1A0340300.00.00	
Matt Black			1A0340400.00.00	




Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro				Not included
Matt White			1A0350300.00.00	
Matt Black			1A0350400.00.00	



Swallows / Rondini				Not included
Matt Black			1A0800400.00.00	

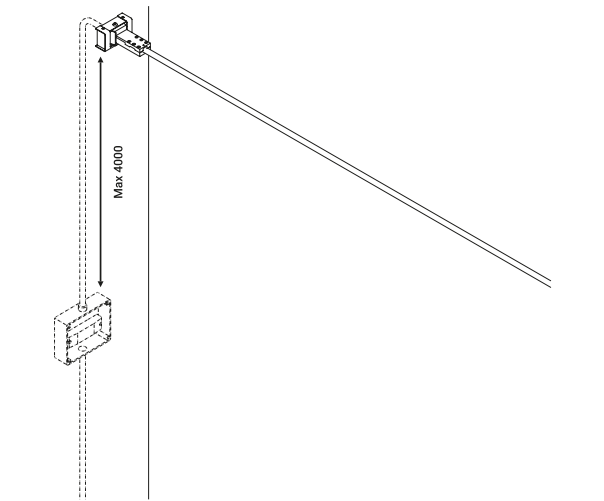


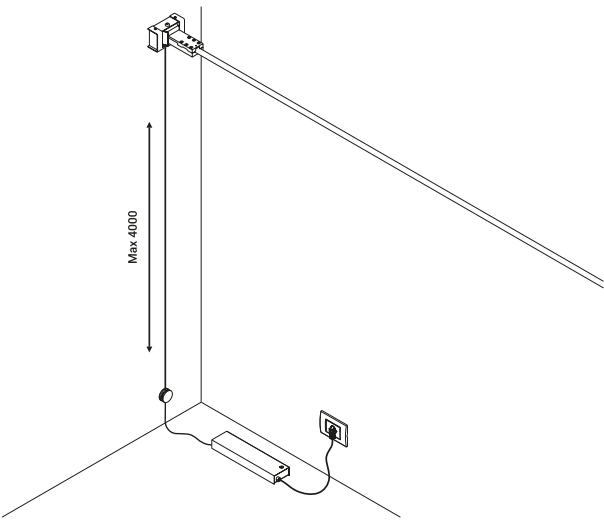Example of installation with remote driver




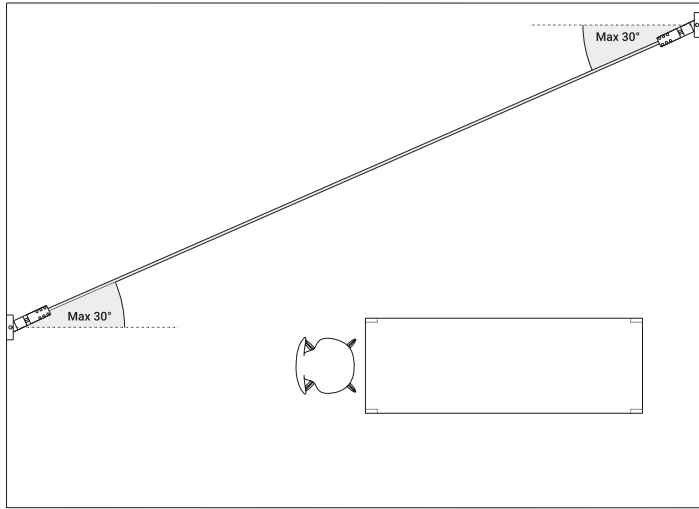Example of installation with driver with plug






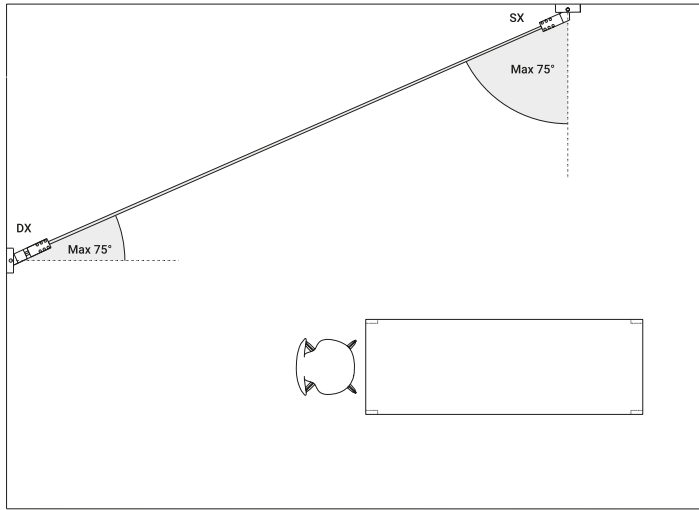
Example of installation with max rotation 30°



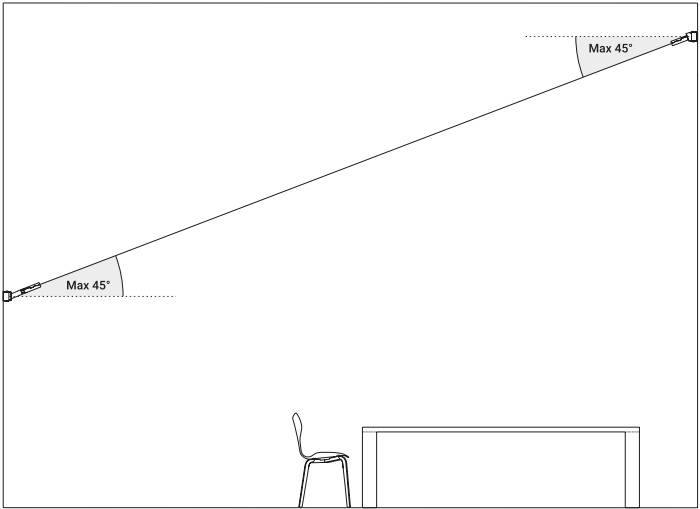1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°



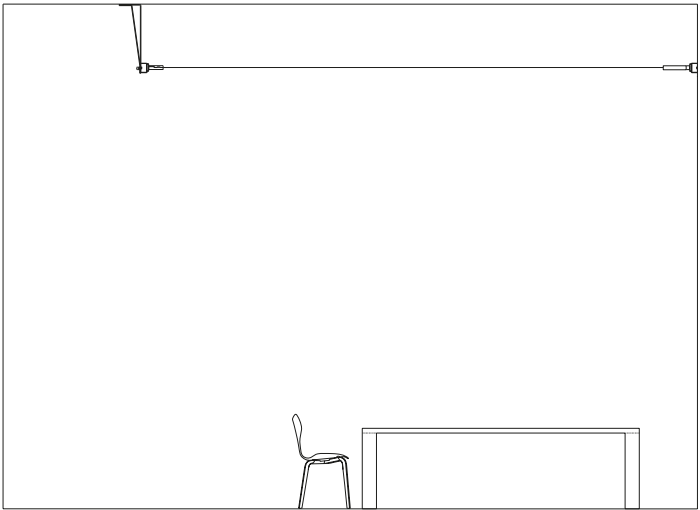1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°



1A0080400.00.00 - Example of installation with ceiling installation kit



Wall lighting system with direct or indirect light for indoor use.	An ultra-thin tape cuts through space, bends and produces direct or indirect light. UTOPIA breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light.	The tape is in electro-coloured matt black AISI 304 stainless steel, is 10 mm wide and can be extended up to 12 m in length (standard measurements 6 / 12 m). The metal tape can be bent in all directions using the special bending accessory. The bending accessory is in textured matt black polyamide. The bending accessory tie-rod is in matt black anodised aluminium, while the tensioning cable is in galvanised steel. The tensioners are in matt black anodised aluminium.	The light source consists of two 8 mm wide LED strips, which can be oriented upwards or downwards. The driver is not included but is available as an accessory.
Sistema di illuminazione da parete, a luce diretta o indiretta, per interni.	Un nastro sottilissimo taglia lo spazio, si piega e produce luce diretta o indiretta. UTOPIA smaterializza l'oggetto lampada, trasformandolo in qualcos'altro, lasciandone solo una traccia, una riga e poi nemmeno più quella, solo la luce.	Il nastro è in AISI 304 elettrocolorato nero opaco, è largo 10 mm e può essere teso fino a 12 m di lunghezza (misure standard 6 / 12 m). Il nastro metallico può essere piegato in tutte le direzioni utilizzando l'apposito deviatore. Il deviatore è in poliammide nero opaco texturizzato. Il tirante del deviatore è in alluminio anodizzato nero opaco mentre il cavo di trazione è in acciaio zincato. I tenditori sono in alluminio anodizzati nero opaco.	La sorgente luminosa è costituita da due strip LED di 8 mm di larghezza utilizzabili rivolte verso l'alto o verso il basso. Il driver non è incluso, ma è disponibile come accessorio.


Finish

.04 Matt Black




Custom finish available on request (wall connection and installation kits only).
Finitura personalizzata su richiesta (solo per attacco da parete e kit di installazione).


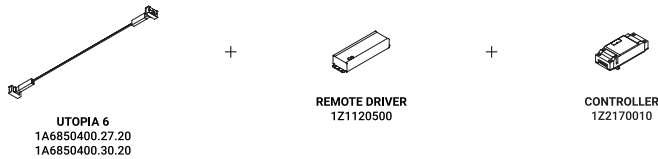
UTOPIA 6
Linear version



UTOPIA 12
Linear version

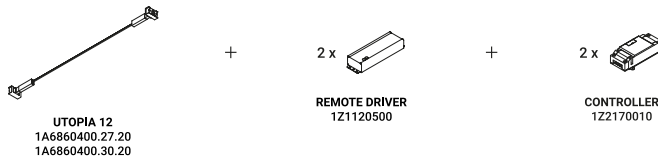


UTOPIA 6
UTOPIA 12
Bent version

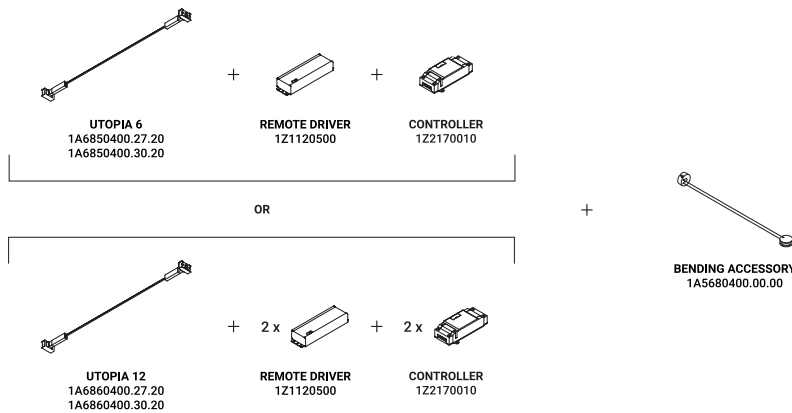

UTOPIA 6
144W
24V DC
2700K - 12168lm / 3000K - 12684lm
CRI >90
Driver not included
CE IP20

Matt Black - 2700K	1A6850400.27.20
Matt Black - 3000K	1A6850400.30.20




UTOPIA 12
288W
24V DC
2700K - 24336lm / 3000K - 25368lm
CRI >90
Driver not included
CE IP20


Matt Black - 2700K	1A6860400.27.20
Matt Black - 3000K	1A6860400.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500



Controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione



Bending accessory / Accessorio di piega		Not included
Matt Black	1A5680400.00.00	



Spacer / Distanziale		Not included
Matt Black	For driver kit with plug	1A4930400.00.00




Ceiling installation kit / Kit d'installazione da soffitto		Not included
Matt White	1A0080300.00.00	
Matt Black	1A0080400.00.00	




Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro		Not included
Matt Black	1A5710400.00.00	




Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro		Not included
Matt Black	1A5720400.00.00	

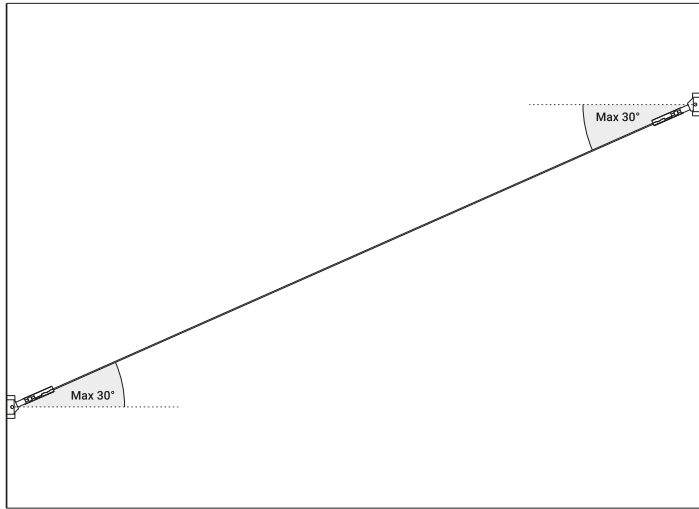

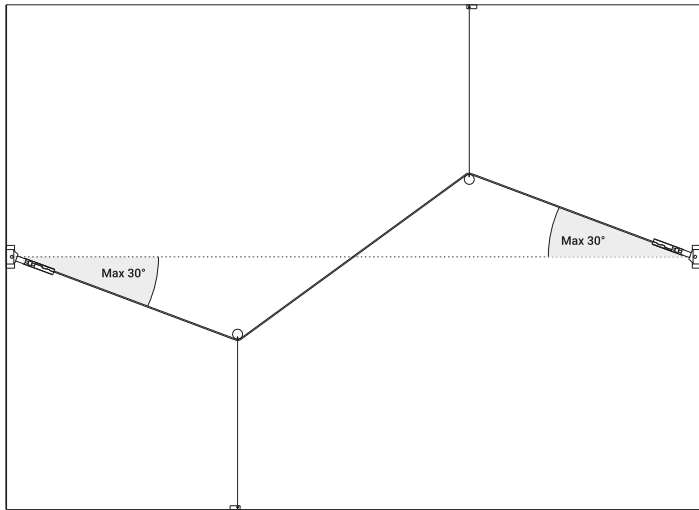
Example of installation with max rotation 30°



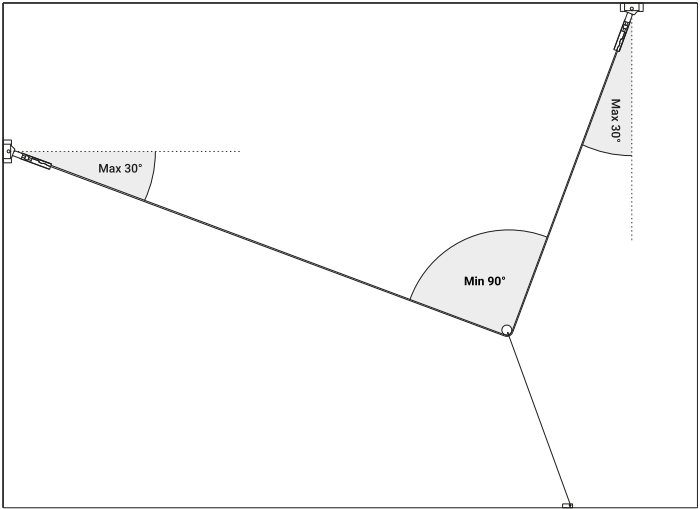
1A5680400.00.00 - Example of installation with bending accessory



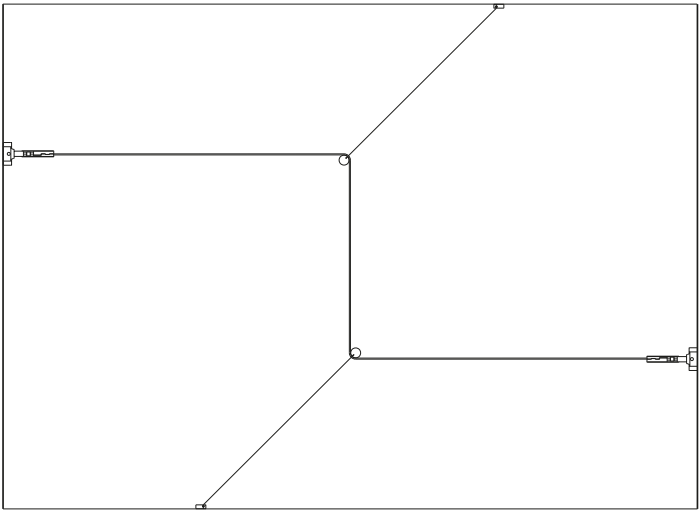1A5680400.00.00 - Example of installation with bending accessory



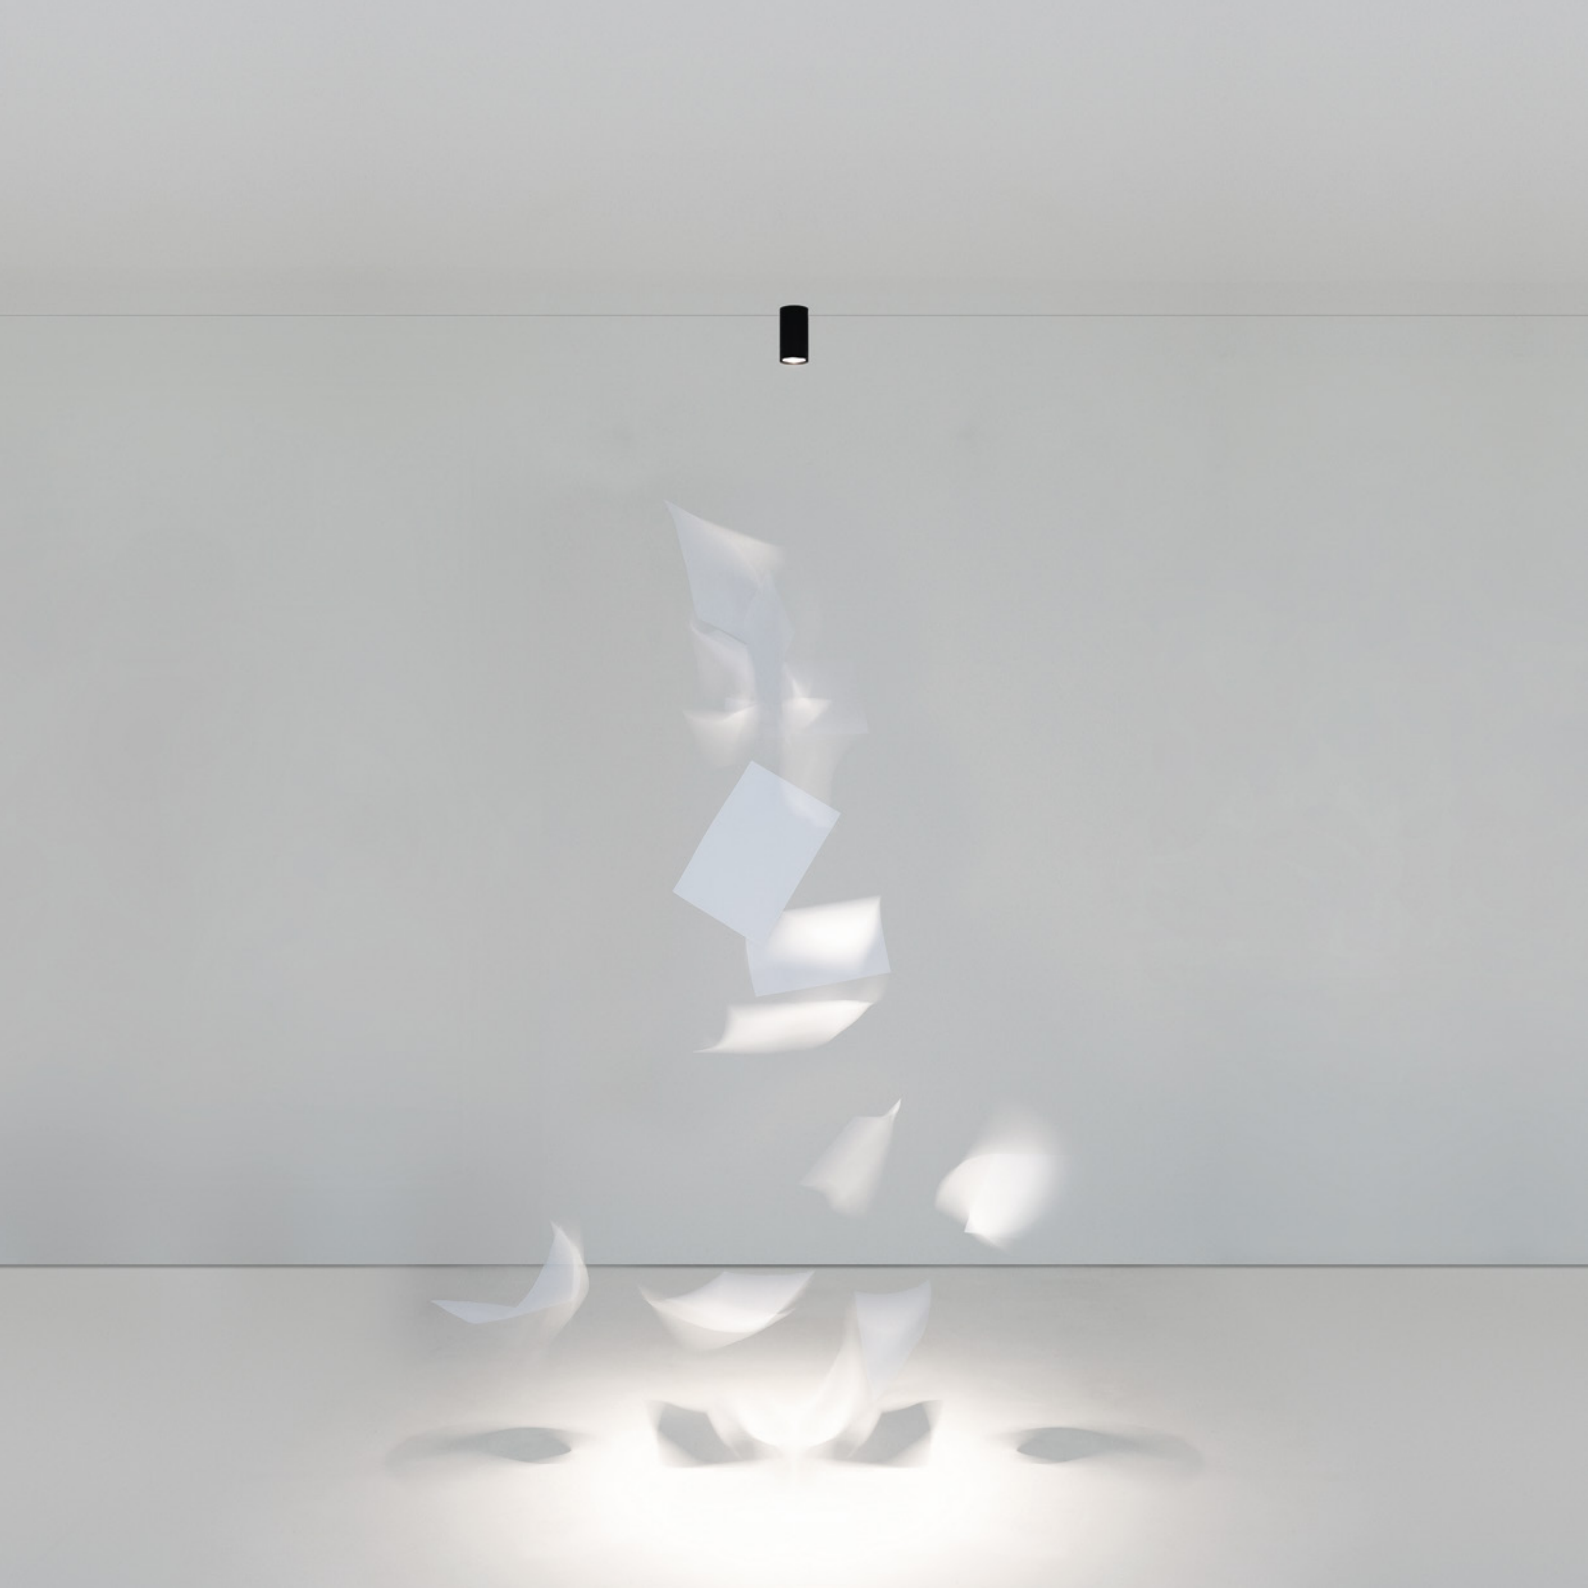
1A5680400.00.00 - Example of installation with bending accessory





Wall or ceiling lighting system with direct light for indoor use.	Light runs on a wire. An almost imperceptible wire, suspended in space. Like a tightrope walker on an ultra-thin wire, the light reaches everywhere, thrilling and impalpable.	The rose is in matt white painted steel. The tie-rod body is in matt white painted aluminium, the tensioner is in polished chrome galvanised brass. The luminaire is in textured matt black polyamide. The lens can be replaced even with the luminaire assembled.	The light source is LED with integrated module. The unipolar cable is in galvanised steel and silver-copper. The version with rose (class I) has an integrated driver with dimmer function. For the version without rose (class III) the driver is not included but available as an accessory.
Sistema di illuminazione da parete o da soffitto, a luce diretta, per interni.	La luce corre sul filo. Un filo quasi impercettibile, sospeso nello spazio. Come un funambolo su una corda sottilissima la luce arriva ovunque, con leggerezza ed emozione.	Il rosone è in acciaio verniciato bianco opaco. Il corpo del tirante è in alluminio verniciato bianco opaco e il tenditore è in ottone galvanizzato cromo lucido. Il corpo illuminante è in poliammide nero opaco texturizzato. È possibile sostituire l'ottica anche ad apparecchio montato.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico unipolare è in acciaio zincato e rame argentato. Per la versione con rosone (classe I) il driver è integrato e dimmerabile. Per la versione senza rosone (classe III) il driver non è integrato, ma disponibile come accessorio.

Finish	.04 Matt Black
	 Custom finish available on request (tie rods and wall/ceiling driver only). Finitura personalizzata su richiesta (solo per tiranti e alimentatore da parete/soffitto).

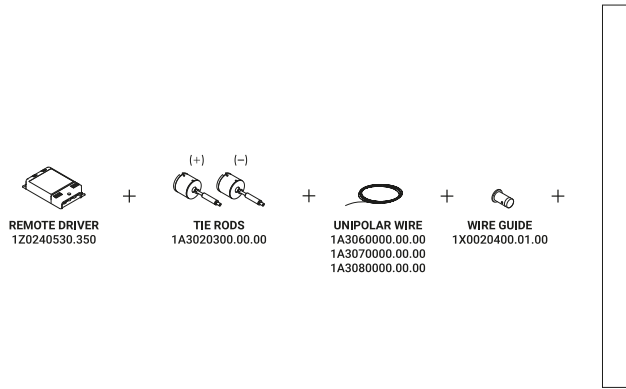OHM
with remote
driver version



OHM
with wall/ceiling
driver version

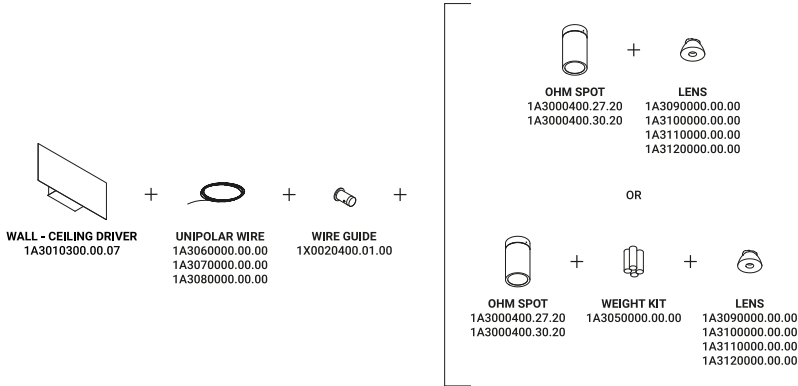


OHM SPOT

3,2W
Max 350mA DC
2700K / 3000K
CRI >95
Driver not included
CE IP20 E

Matt Black - 2700K	1A3000400.27.20
Matt Black - 3000K	1A3000400.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Tie rods / Tiranti		Not included
Matt White	2 Pieces	1A3020300.00.00




Unipolar wire - 12 m / Cavo unipolare - 12 m	Not included
Max 60V DC	1A3060000.00.00


Unipolar wire - 24 m / Cavo unipolare - 24 m	Not included
Max 60V DC	1A3070000.00.00

Unipolar wire - 48 m / Cavo unipolare - 48 m	Not included
Max 60V DC	1A3080000.00.00

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V	1Z0240530.350



Wall/ceiling driver / Alimentatore da parete/soffitto		Not included
Matt White	Input 100-240V - 50/60Hz Output 350mA - Max 4x3,2W - IP20 DALI - PUSH - 1-10V	1A3010300.00.07

Compulsory accessories / Accessori obbligatori


Other accessories / Altri accessori



Lens / Lente		Not included		
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00	
	3000K - CRI >95 - 288lm			
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00	
	3000K - CRI >95 - 286lm			
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00	
	3000K - CRI >95 - 273lm			
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00	
	3000K - CRI >95 - 270lm			

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione





Wall adapter plate / Piastra parete		Not included		
Matt White	For mounting on brick masonry walls		1A3030300.00.00	




Wire guide / Guidacavo		Not included		
Matt Black	1 Piece		1X0020400.01.00	




Weight kit for suspension version / Kit pesi per versione a sospensione		Not included		
	4 Pieces		1A3050000.00.00	

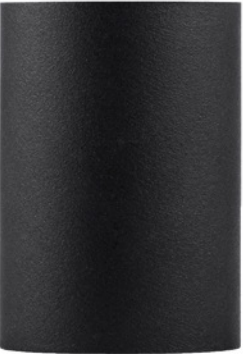


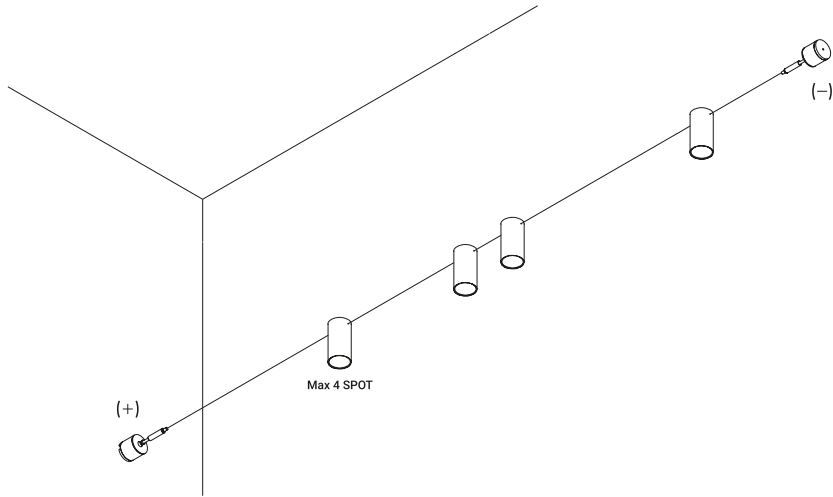


Remote driver version

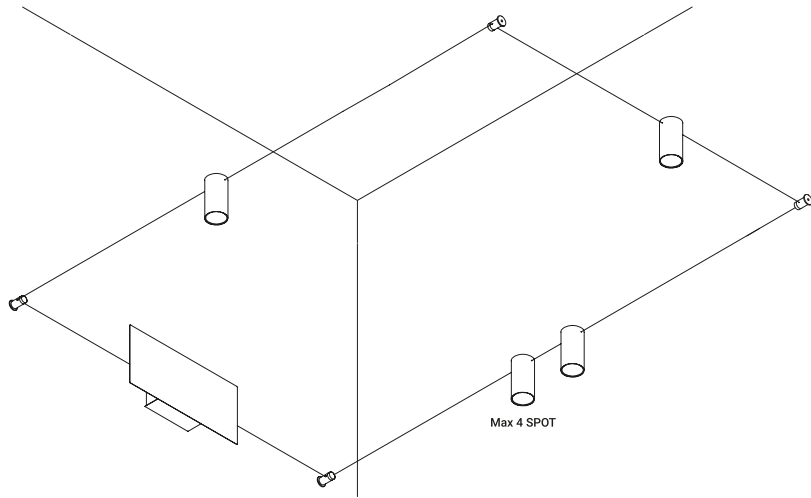

Wall/ceiling driver version

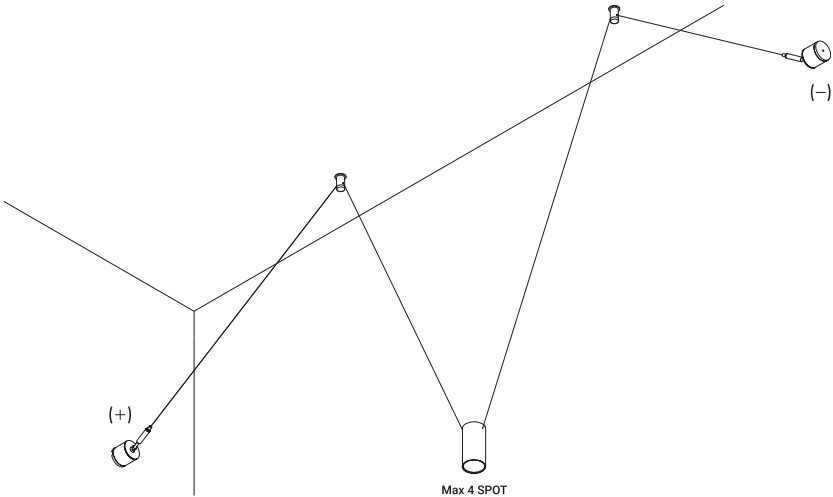




Suspension version

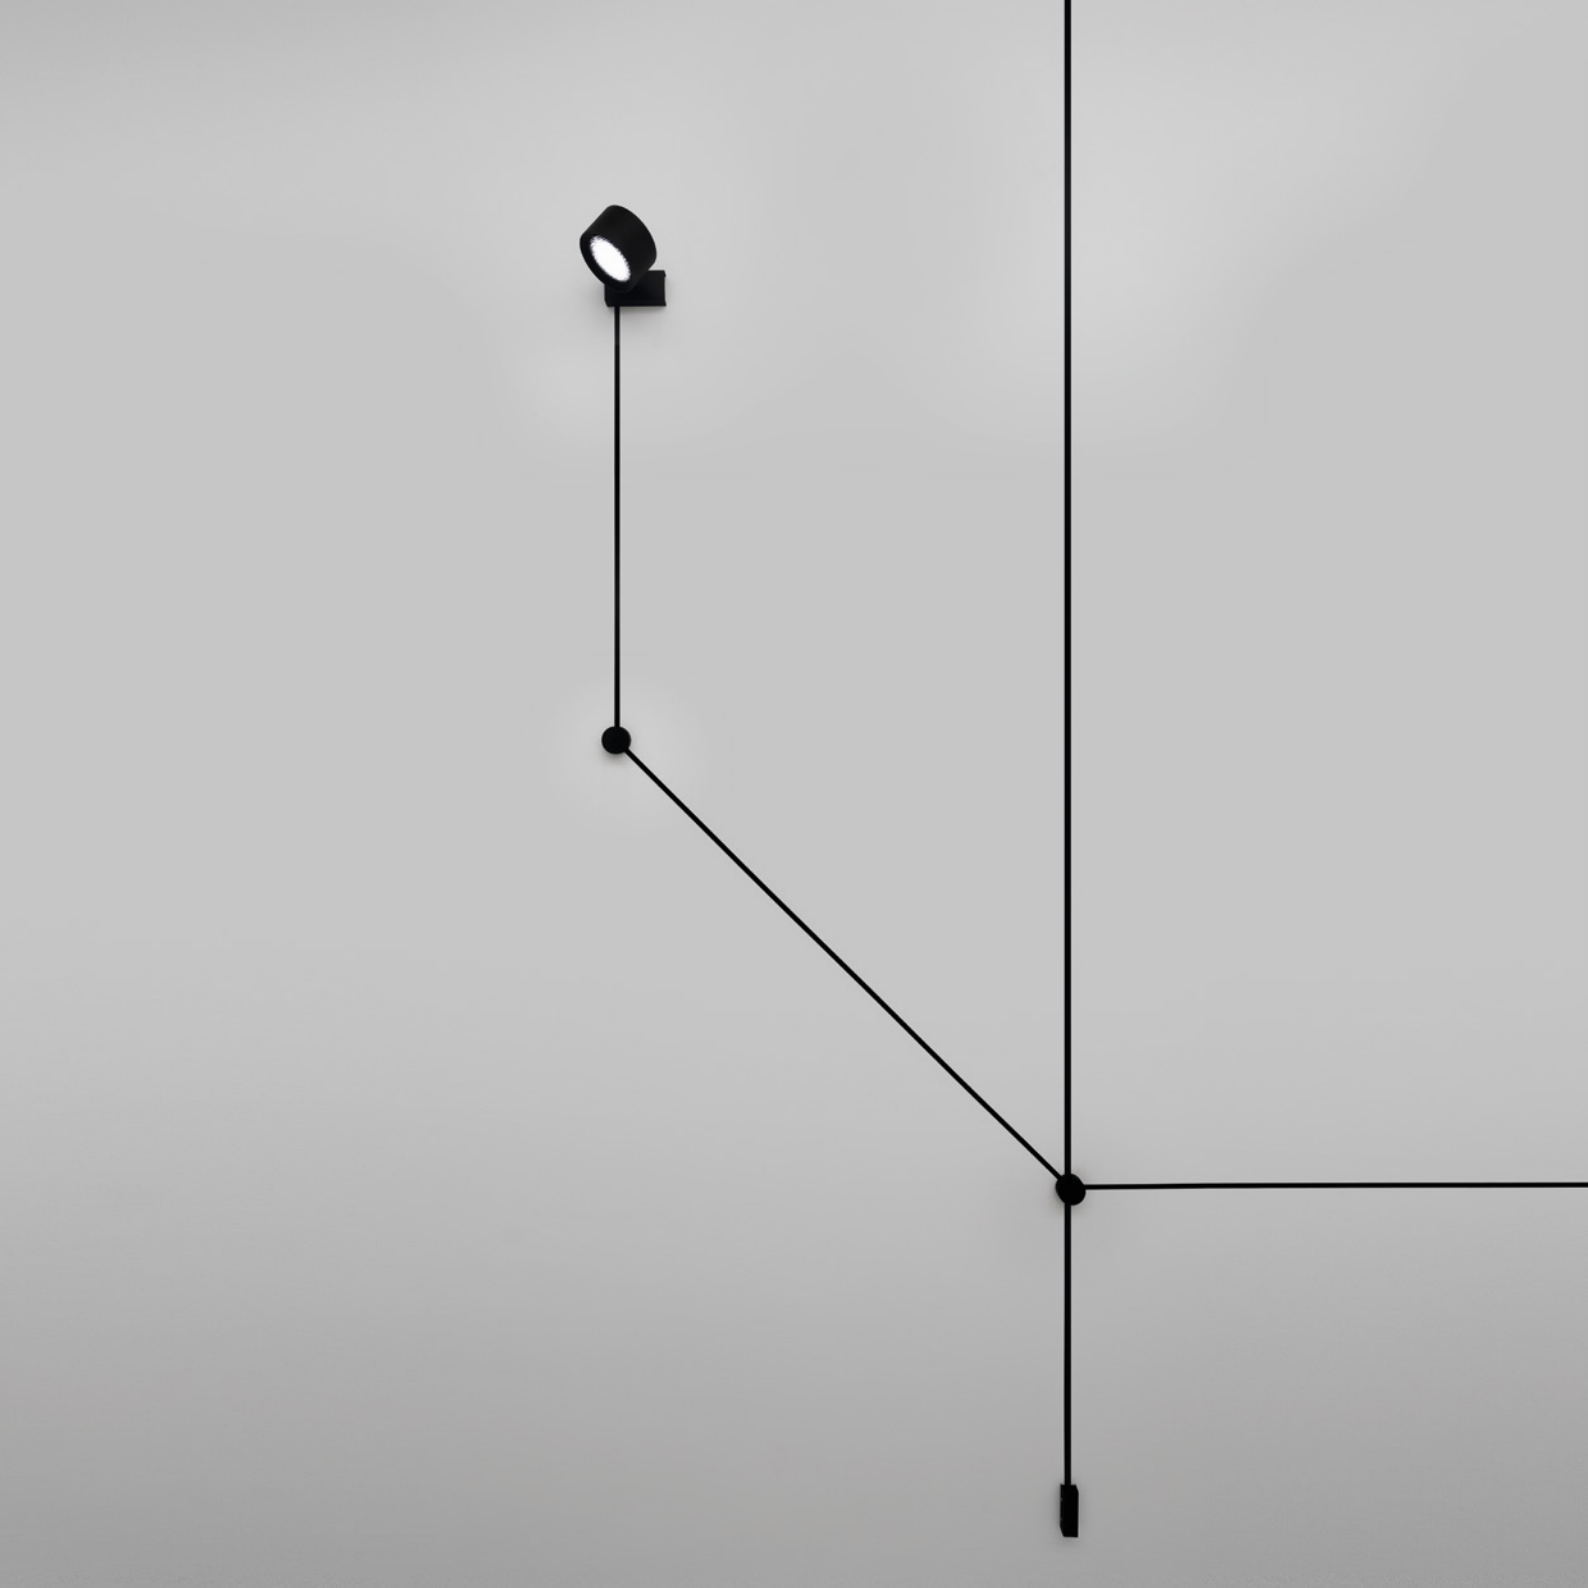




Wall or ceiling lighting system for indoor use.	Absolute freedom, absolute spatiality, absolute creativity. ENDLESS is the system created and patented by our Team to digitally and graphically take electric energy wherever you wish. It's the idea of considering walls and ceilings like electronic circuits, where luminaires can be done fixed freely and easily.	The rose is in textured matt black or matt white painted steel. The conductor tape is adhesive and can be applied anywhere on walls and ceilings to power some of our lighting projects. The adhesive covering tape is in matt white or matt black PVC. A range of composition accessories is available.	ENDLESS is powered at max 48V DC (max 4A) and is modular. The system is compatible with a wide range of luminaires.
Sistema di alimentazione da parete o da soffitto, per interni.	Libertà assoluta, spazialità assoluta, creatività assoluta. ENDLESS è il sistema ideato e brevettato dal nostro Team per portare "differenza di potenziale" dove si desidera in modo grafico e digitale. È l'idea di considerare le pareti e i soffitti come circuiti elettronici per posizionare gli apparecchi illuminanti con la massima libertà.	Il rosone è in acciaio verniciato bianco opaco o nero opaco texturizzato. Il nastro conduttore è adesivo e può essere applicato a piacimento su pareti e soffitti per alimentare alcuni nostri modelli. Il nastro adesivo di copertura è in PVC di colore bianco opaco o nero opaco. Sono disponibili diversi accessori di composizione.	ENDLESS funziona al massimo a 48V DC (max 4A) ed è componibile. Il sistema è compatibile con un'ampia gamma di apparecchi di illuminazione.

Finish	.00	Standard
--------	-----	----------

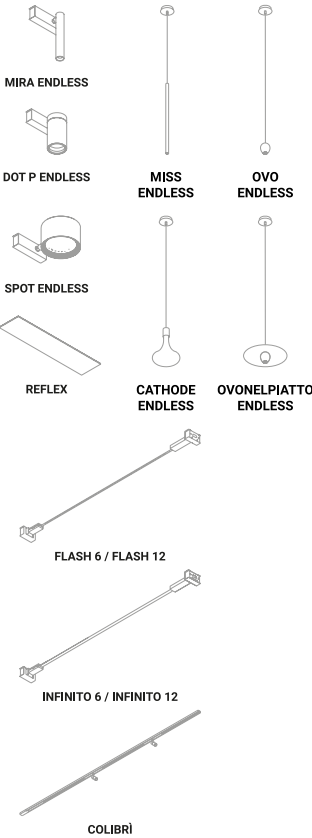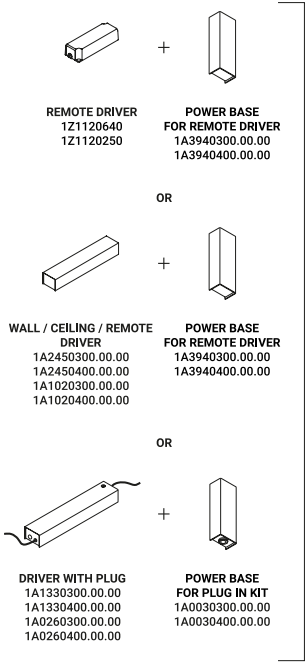
ENDLESS ON/OFF
(Max 48V DC -
Max 150W - Max 4A)



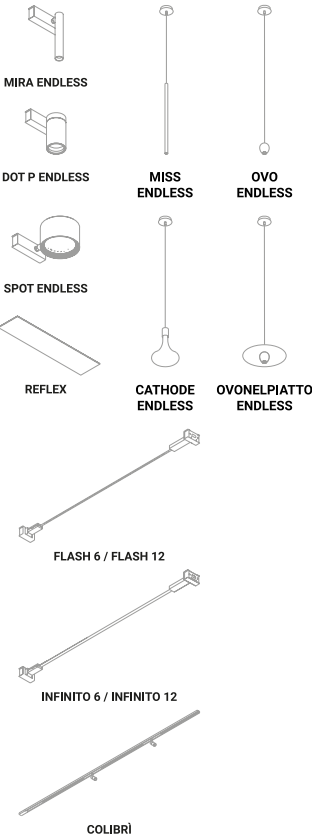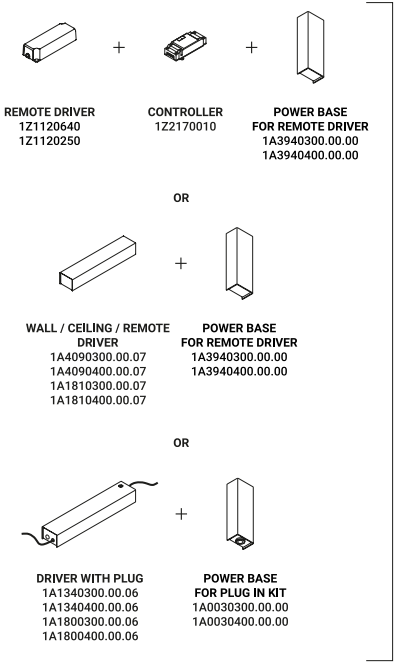
ENDLESS dimmable
(Max 48V DC -
Max 150W - Max 4A)



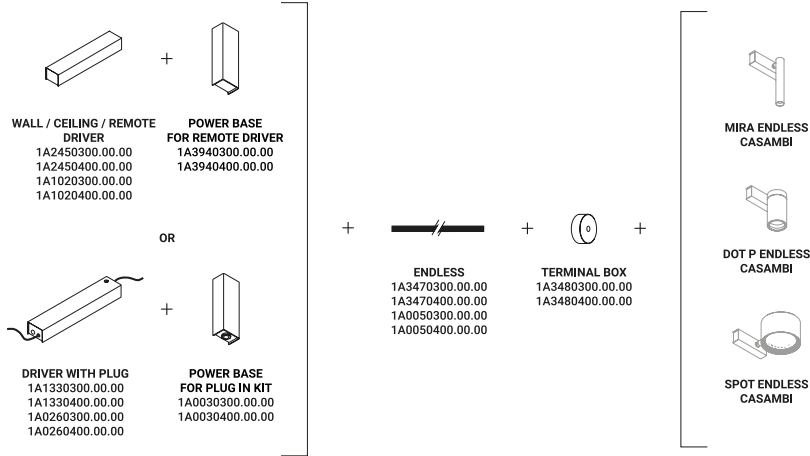ENDLESS CASAMBI
(Max 48V DC -
Max 150W - Max 4A)



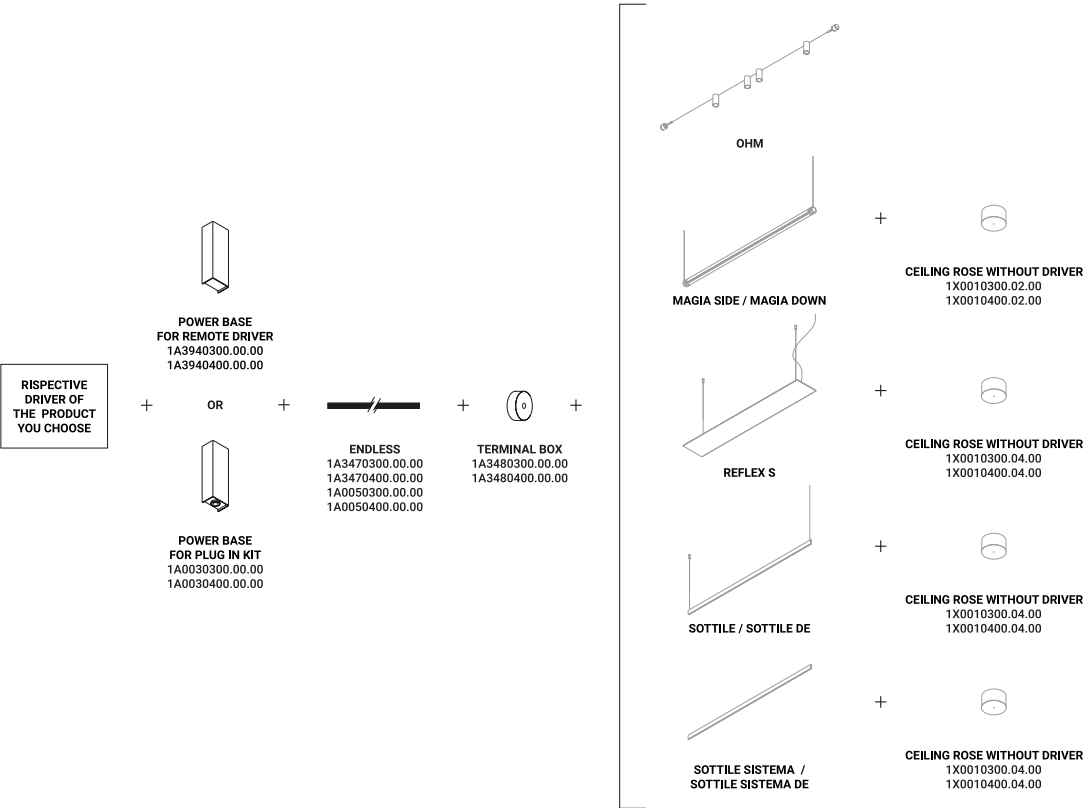ENDLESS conductive
tape used with voltage/
current other than 48V
DC



Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Strip Endless - 5 m			Not included
Matt White	Max 48V DC - Max 150W - Max 4A	1A3470300.00.00	
Matt Black	Max 48V DC - Max 150W - Max 4A	1A3470400.00.00	




Strip Endless - 10 m			Not included
Matt White	Max 48V DC - Max 150W - Max 4A	1A0050300.00.00	
Matt Black	Max 48V DC - Max 150W - Max 4A	1A0050400.00.00	




Fixing rough walls kit / Kit di fissaggio per pareti ruvide			Not included
Length 2,5 m		1A0370000.00.00	



Terminal box / Scatola di collegamento			Not included
Matt White	2 Terminals included	1A3480300.00.00	
Matt Black	2 Terminals included	1A3480400.00.00	



Power base for plug in kit / Base di alimentazione per kit con spina			Not included
Matt White		1A0030300.00.00	
Matt Black		1A0030400.00.00	




Power base for remote driver / Base di alimentazione per alimentatore remoto			Not included
Matt White		1A3940300.00.00	
Matt Black		1A3940400.00.00	




Terminals / Morsetti			Not included
2 Pieces		1A3490000.00.00	

Compulsory accessories / Accessori obbligatori


Drivers for ENDLESS ON/OFF system and CASAMBI / Alimentatori per ENDLESS ON/OFF e CASAMBI




Driver with plug / Alimentatore con spina			Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A1330300.00.00	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A1330400.00.00	



Wall/ceiling/remote driver / Alimentatore parete/soffitto/remoto			Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A2450300.00.00	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A2450400.00.00	




Driver with plug / Alimentatore con spina			Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A0260300.00.00	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A0260400.00.00	




Wall/ceiling/remote driver / Alimentatore parete/soffitto/remoto			Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A1020300.00.00	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A1020400.00.00	

Compulsory accessories / Accessori obbligatori


Drivers for ENDLESS dimmable system / Alimentatori per ENDLESS dimmerabile




Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - Dimmer on board	1A1340300.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - Dimmer on board	1A1340400.00.06



Wall/ceiling driver / Alimentatore parete/soffitto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090400.00.07




Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - Dimmer on board	1A1800300.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - Dimmer on board	1A1800400.00.06




Wall/ceiling driver / Alimentatore parete/soffitto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - DALI - PUSH - 1-10V	1A1810300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - DALI - PUSH - 1-10V	1A1810400.00.07

Compulsory accessories / Accessori obbligatori


Remote drivers for ENDLESS / Alimentatori remoti per ENDLESS



Driver / Alimentatore		Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640




Driver / Alimentatore		Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250




Controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010

Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125A			Wattage (W)	Ampere (A)
Power Kit:	1A133XX00.00.00	Driver with plug - 48V - ON/OFF	Max 60	Max 1,25
	1A245XX00.00.00	Wall/ceiling/remote driver - 48V - ON/OFF	Max 60	Max 1,25
	1A026XX00.00.00	Driver with plug - 48V - ON/OFF	Max 150	Max 3,12
	1A102XX00.00.00	Wall/ceiling/remote driver - 48V - ON/OFF	Max 150	Max 3,12
	1A134XX00.00.06	Driver with plug - 48V - Dimmer on board	Max 60	Max 1,25
	1A409XX00.00.07	Wall/ceiling driver - 48V - DALI - PUSH - 1-10V	Max 60	Max 1,25
	1A180XX00.00.06	Driver with plug - 48V - Dimmer on board	Max 150	Max 3,12
	1A181XX00.00.07	Wall/ceiling driver - 48V - DALI - PUSH - 1-10V	Max 150	Max 3,12
	1Z1120640	Remote driver - 48V - ON/OFF	Max 60	Max 1,25
	1Z1120250	Remote driver - 48V - 1-10V	Max 150	Max 3,12
Elements:	1A2980300.27.40	CATHODE ENDLESS - Matt White - 2700K	6,3	0,16
	1A2980300.30.40	CATHODE ENDLESS - Matt White - 3000K	6,3	0,16
	1A2980800.27.40	CATHODE ENDLESS - Brushed Brass - 2700K	6,3	0,16
	1A2980800.30.40	CATHODE ENDLESS - Brushed Brass - 3000K	6,3	0,16
	1A2982800.27.40	CATHODE ENDLESS - Polished Black Chrome - 2700K	6,3	0,16
	1A2982800.30.40	CATHODE ENDLESS - Polished Black Chrome - 3000K	6,3	0,16
	1A4260400.27.01	COLIBRÌ 18 - 15° - Matt Black - 2700K - DALI	2	0,05
	1A4260400.30.01	COLIBRÌ 18 - 15° - Matt Black - 3000K - DALI	2	0,05
	1A4270400.27.01	COLIBRÌ 18 - 25° - Matt Black - 2700K - DALI	2	0,05
	1A4270400.30.01	COLIBRÌ 18 - 25° - Matt Black - 3000K - DALI	2	0,05
	1A4280400.27.01	COLIBRÌ 28 - 15° - Matt Black - 2700K - DALI	4	0,10
	1A4280400.30.01	COLIBRÌ 28 - 15° - Matt Black - 3000K - DALI	4	0,10
	1A4290400.27.01	COLIBRÌ 28 - 25° - Matt Black - 2700K - DALI	5	0,13
	1A4290400.30.01	COLIBRÌ 28 - 25° Matt Black - 3000K - DALI	5	0,13
	1A2340300.27.40	DOT P ENDLESS - Matt White - 2700K	13	0,34
	1A2340300.30.40	DOT P ENDLESS - Matt White - 3000K	13	0,34
	1A2340400.27.40	DOT P ENDLESS - Matt Black - 2700K	13	0,34
	1A2340400.30.40	DOT P ENDLESS - Matt Black - 3000K	13	0,34
	1A2344900.27.40	DOT P ENDLESS - Matt Black/Polished Gold - 2700K	13	0,34
	1A2344900.30.40	DOT P ENDLESS - Matt Black/Polished Gold - 3000K	13	0,34
	1A2340300.27.41	DOT P ENDLESS CASAMBI - Matt White - 2700K	13	0,34
	1A2340300.30.41	DOT P ENDLESS CASAMBI - Matt White - 3000K	13	0,34
	1A2340400.27.41	DOT P ENDLESS CASAMBI - Matt Black - 2700K	13	0,34
	1A2340400.30.41	DOT P ENDLESS CASAMBI - Matt Black - 3000K	13	0,34
	1A2344900.27.41	DOT P ENDLESS CASAMBI - Matt Black/Polished Gold - 2700K	13	0,34
	1A2344900.30.41	DOT P ENDLESS CASAMBI - Matt Black/Polished Gold - 3000K	13	0,34
	1A2130300.27.20	FLASH 6 - Matt White - 2700K	55	1,43
	1A2130300.30.20	FLASH 6 - Matt White - 3000K	55	1,43
	1A2130400.27.20	FLASH 6 - Matt Black - 2700K	55	1,43
	1A2130400.30.20	FLASH 6 - Matt Black - 3000K	55	1,43
	1A2150300.27.20	FLASH 12 - Matt White - 2700K	110	2,86
	1A2150300.30.20	FLASH 12 - Matt White - 3000K	110	2,86
	1A2150400.27.20	FLASH 12 - Matt Black - 2700K	110	2,86
	1A2150400.30.20	FLASH 12 - Matt Black - 3000K	110	2,86


Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125A			Wattage (W)	Ampere (A)
Elements:	1A2250300.27.20	INFINITO 6 - Matt White - 2700K	55	1,43
	1A2250300.30.20	INFINITO 6 - Matt White - 3000K	55	1,43
	1A2250400.27.20	INFINITO 6 - Matt Black - 2700K	55	1,43
	1A2250400.30.20	INFINITO 6 - Matt Black - 3000K	55	1,43
	1A2260300.27.20	INFINITO 12 - Matt White - 2700K	114	2,86
	1A2260300.30.20	INFINITO 12 - Matt White - 3000K	114	2,86
	1A2260400.27.20	INFINITO 12 - Matt Black - 2700K	114	2,86
	1A2260400.30.20	INFINITO 12 - Matt Black - 3000K	114	2,86
	1A2280300.27.40	MIRA ENDLESS - Matt White - 2700K	6	0,16
	1A2280300.30.40	MIRA ENDLESS - Matt White - 3000K	6	0,16
	1A2280400.27.40	MIRA ENDLESS - Matt Black - 2700K	6	0,16
	1A2280400.30.40	MIRA ENDLESS - Matt Black - 3000K	6	0,16
	1A2284900.27.40	MIRA ENDLESS - Matt Black/Polished Gold - 2700K	6	0,16
	1A2284900.30.40	MIRA ENDLESS - Matt Black/Polished Gold - 3000K	6	0,16
	1A2280300.27.41	MIRA ENDLESS CASAMBI - Matt White - 2700K	7	0,18
	1A2280300.30.41	MIRA ENDLESS CASAMBI - Matt White - 3000K	7	0,18
	1A2280400.27.41	MIRA ENDLESS CASAMBI - Matt Black - 2700K	7	0,18
	1A2280400.30.41	MIRA ENDLESS CASAMBI - Matt Black - 3000K	7	0,18
	1A2284900.27.41	MIRA ENDLESS CASAMBI - Matt Black/Polished Gold - 2700K	7	0,18
	1A2284900.30.41	MIRA ENDLESS CASAMBI - Matt Black/Polished Gold - 3000K	7	0,18
	1A2960300.27.40	MISS ENDLESS - Matt White - 2700K	6,3	0,16
	1A2960300.30.40	MISS ENDLESS - Matt White - 3000K	6,3	0,16
	1A2960400.27.40	MISS ENDLESS - Matt Black - 2700K	6,3	0,16
	1A2960400.30.40	MISS ENDLESS - Matt Black - 3000K	6,3	0,16
	1A2960800.27.40	MISS ENDLESS - Brushed Brass - 2700K	6,3	0,16
	1A2960800.30.40	MISS ENDLESS - Brushed Brass - 3000K	6,3	0,16
	1A2962600.27.40	MISS ENDLESS - Total Black - 2700K	6,3	0,16
	1A2962600.30.40	MISS ENDLESS - Total Black - 3000K	6,3	0,16
	1A2962800.27.40	MISS ENDLESS - Polished Black Chrome - 2700K	6,3	0,16
	1A2962800.30.40	MISS ENDLESS - Polished Black Chrome - 3000K	6,3	0,16
	1A6450300.27.40	OVO ENDLESS - Matt White - 2700K	6,3	0,16
	1A6450300.30.40	OVO ENDLESS - Matt White - 3000K	6,3	0,16
	1A6530300.27.40	OVONELPIATTO ENDLESS - Matt White - 2700K	6,3	0,16
	1A6530300.30.40	OVONELPIATTO ENDLESS - Matt White - 3000K	6,3	0,16
	1A5500400.27.20	REFLEX - Matt Black - 2700K	40	1,04
	1A5500400.30.20	REFLEX - Matt Black - 3000K	40	1,04
	1A1080300.00.40	SPOT ENDLESS - Matt White	Max 13	Max 0,34
	1A1080400.00.40	SPOT ENDLESS - Matt Black	Max 13	Max 0,34
	1A1084900.00.40	SPOT ENDLESS - Matt Black/Polished Gold	Max 13	Max 0,34
	1A1080300.00.41	SPOT ENDLESS CASAMBI - Matt White	Max 13	Max 0,34
	1A1080400.00.41	SPOT ENDLESS CASAMBI - Matt Black	Max 13	Max 0,34
	1A1084900.00.41	SPOT ENDLESS CASAMBI - Matt Black/Polished Gold	Max 13	Max 0,34

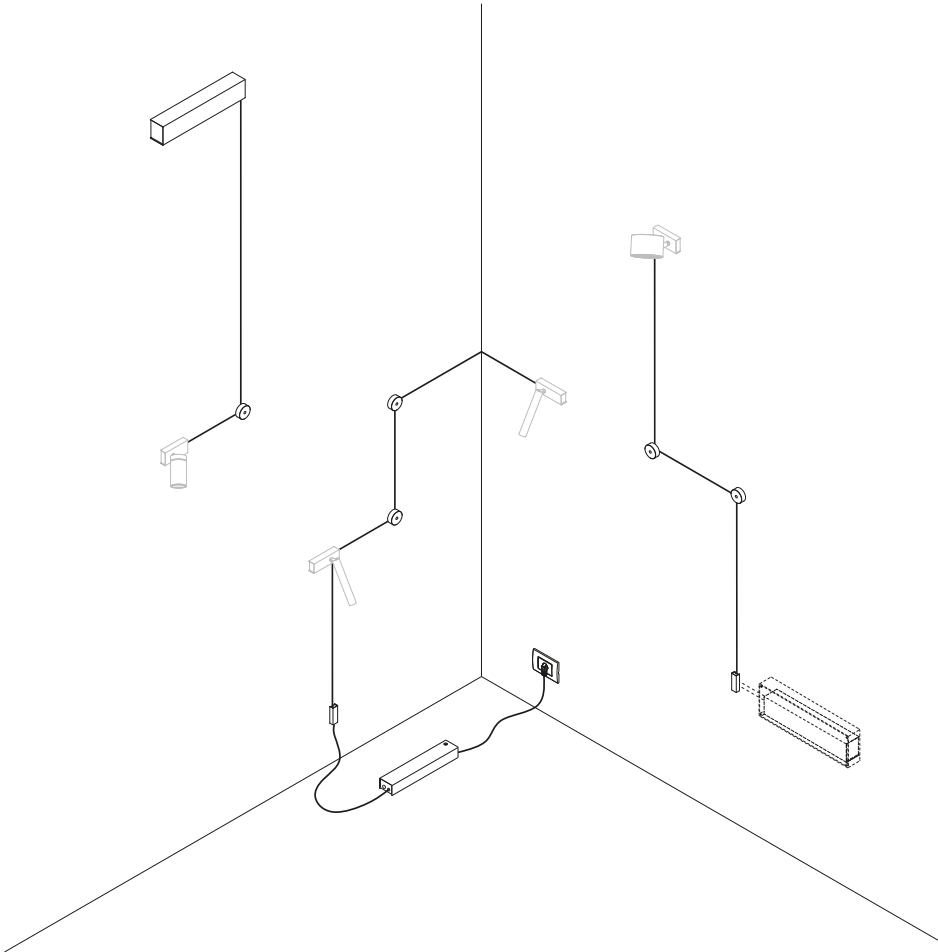

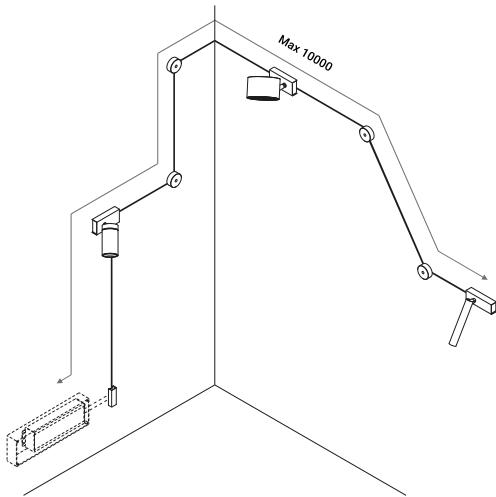
Examples of installation with the three different power supply modes



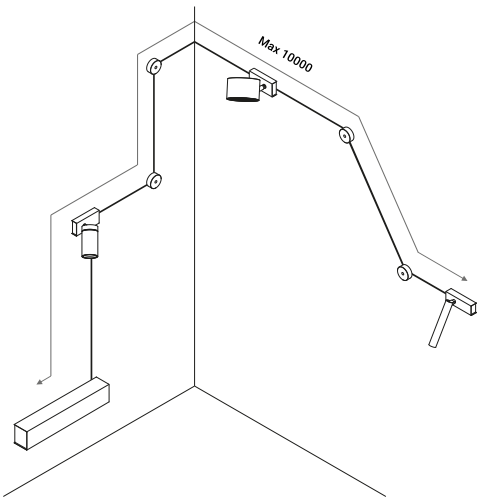
Example of combined installation between various devices with remote driver



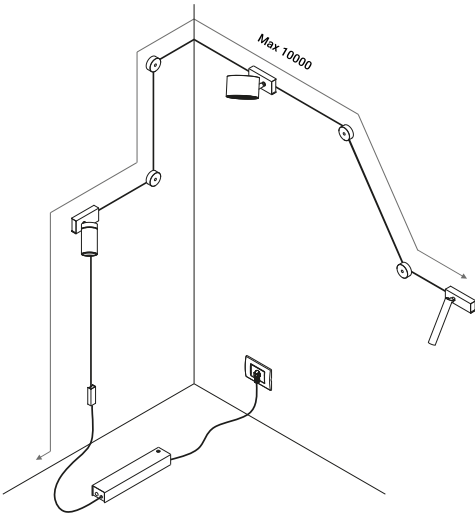
Example of combined installation between various devices with wall/ceiling driver



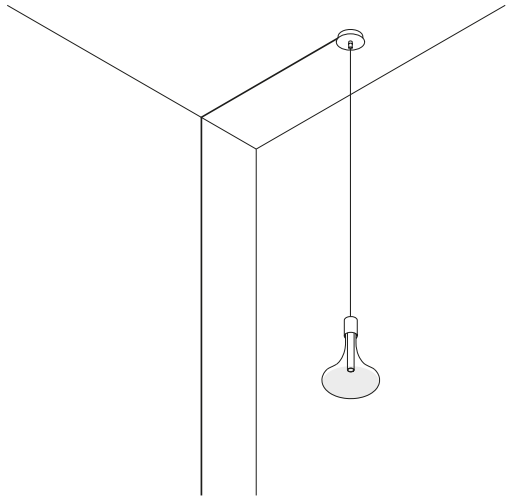
Example of combined installation between various devices with driver with plug




CATHODE: example of installation

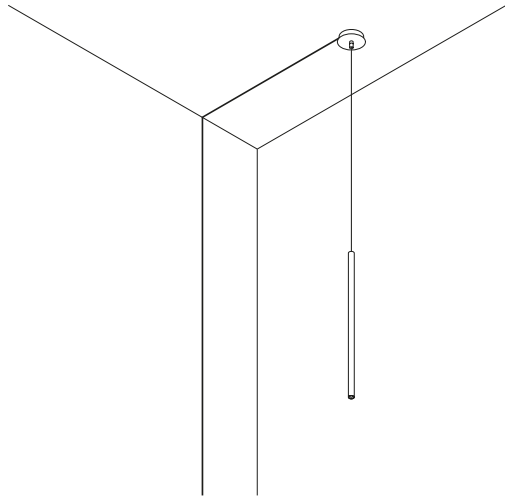

MISS: example of installation

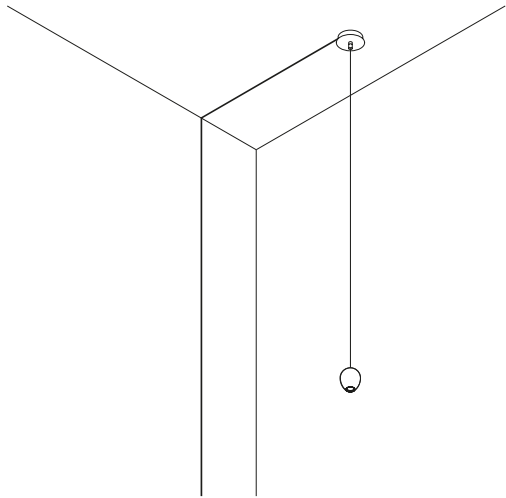


OVO: example of installation

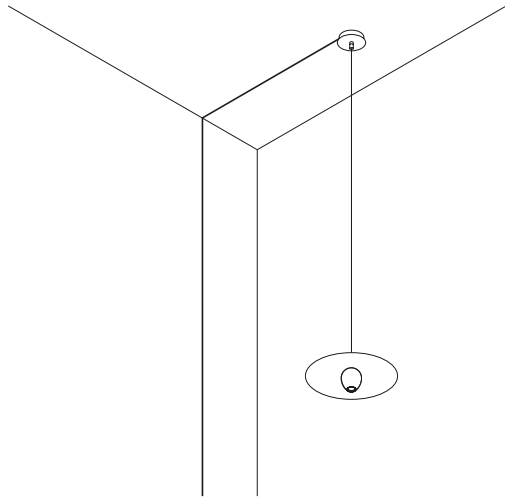


OVONELPIATTO: example of installation




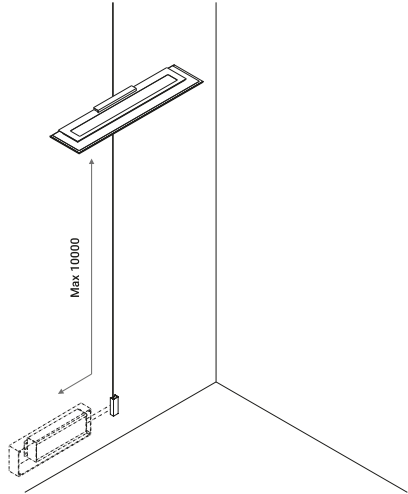

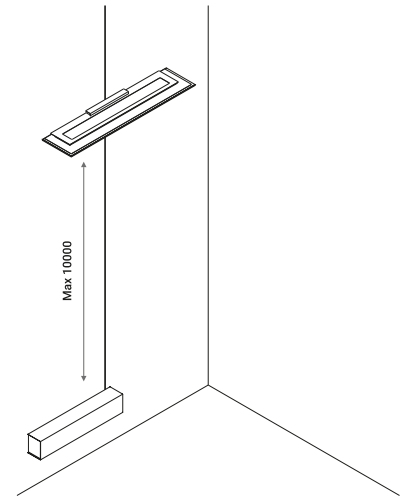
REFLEX: example of installation with remote driver



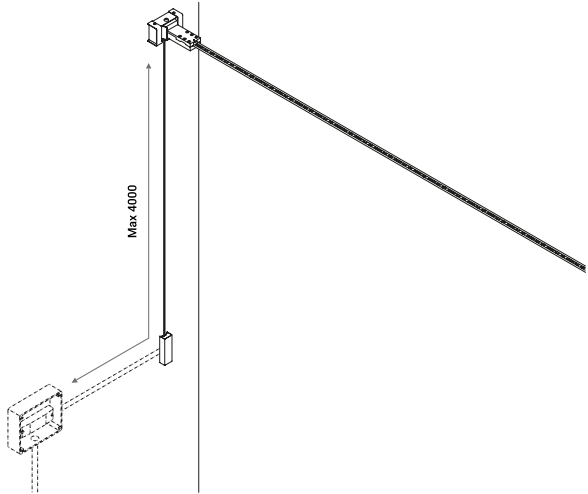
REFLEX: example of installation with wall/ceiling driver



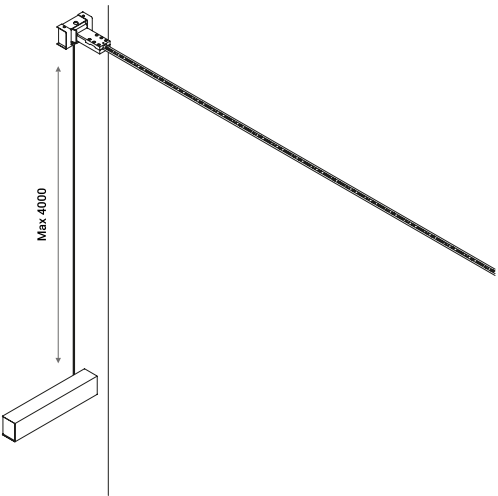
FLASH and INFINITO: example of installation with remote driver



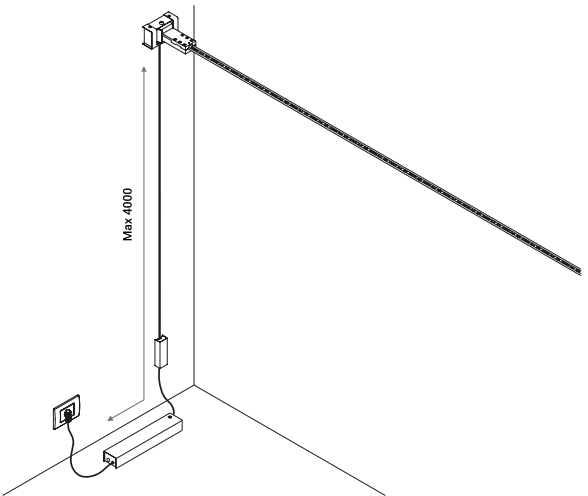FLASH and INFINITO: example of installation with wall/ceiling driver



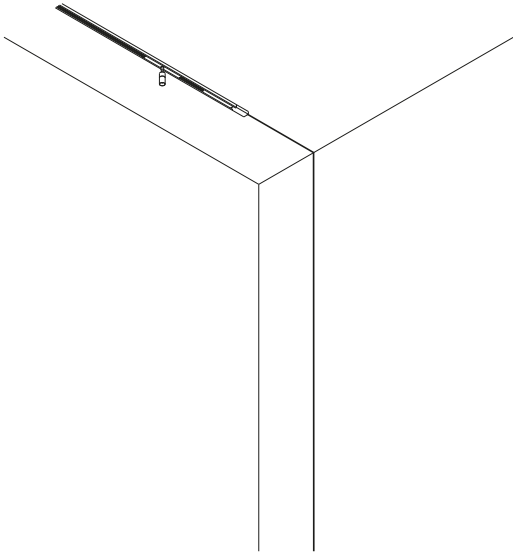
FLASH and INFINITO: example of installation with driver with plug




COLIBRI: example of installation



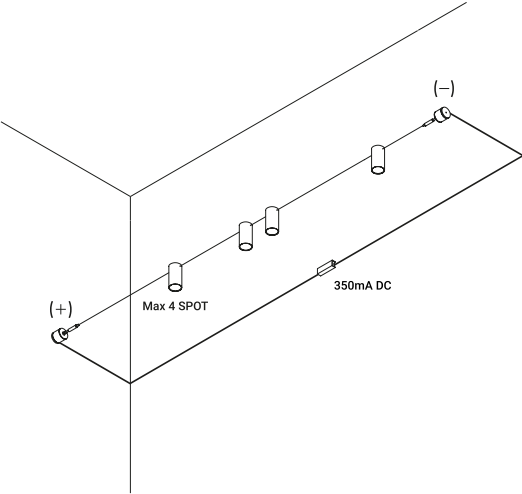
1A4170000.20.00
COLIBRI ENDLESS connector



OHM: example of installation

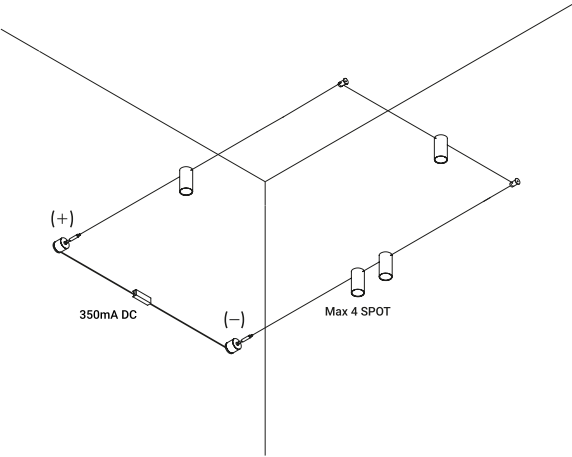

OHM: example of installation

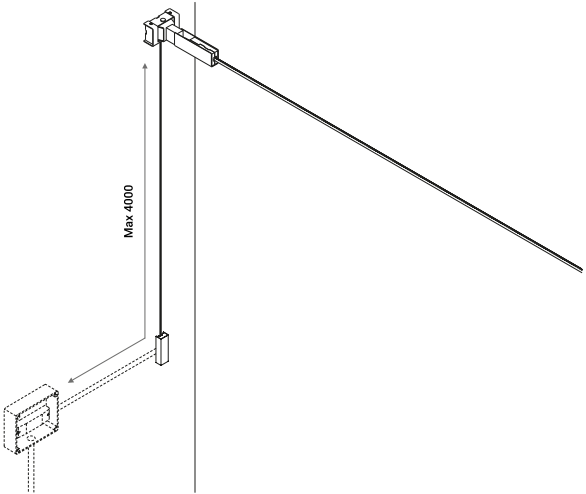

UTOPIA: example of installation



Wall or ceiling lighting system with indirect light for indoor use.	Special side-emitting LED strip with continuous light. Applied to any surface with an adhesive system.	The profile is in matt black rubber. The system is modular. A range of connection accessories is available.	The light source is an 8 mm wide LED strip. The driver is not included but is available as an accessory.
Sistema di illuminazione da parete o da soffitto, a luce indiretta, per interni.	Speciale strip LED ad emissione laterale e a luce continua. Applicabile ad ogni superficie tramite un adesivo.	Il profilo è in gomma di colore nero opaco. Il sistema è componibile. Sono disponibili diversi accessori di aggregazione.	La sorgente luminosa è costituita da una strip LED di 8 mm di larghezza. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.00	Standard
--------	-----	----------

Compulsory accessories / Accessori obbligatori


Installation kits / Kit d'installazione



Tratto - 6 m		Not included
Matt Black	Input 24V DC - 72W - IP20 2700K - 6079lm - CRI >90	1A6330400.27.20
	Input 24V DC - 72W - IP20 3000K - 6322lm - CRI >90	1A6330400.30.20




Tratto - 12 m		Not included
Matt Black	Input 24V DC - 144W - IP20 2700K - 10133lm - CRI >90	1A6340400.27.20
	Input 24V DC - 144W - IP20 3000K - 10538lm - CRI >90	1A6340400.30.20




Power base for remote driver / Base di alimentazione per alimentatore remoto		Not included
Matt Black		1A6460400.00.00


Drivers / Alimentatori



Driver / Alimentatore		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540



Driver / Alimentatore		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500



Controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Fixing rough walls kit / Kit di fissaggio per pareti ruvide		Not included
Length 2,5 m		1A0370000.00.00


TRACKS - PROFILES / BINARI - PROFILI




Wall or ceiling lighting system with direct light for indoor use.	A minimal track system with tiny lights, small humming birds that perch where needed.	The matt white or matt black painted aluminium track is available in 1 m, 2 m and 3 m lengths. A range of connection and suspension accessories is available. The base of the spotlight is in matt black polycarbonate. The spotlight is in matt black anodised aluminium and is adjustable in all directions.	The track is powered at 48V DC and is modular.
Sistema di illuminazione da soffitto o da parete, a luce diretta, per interni.	Un sistema a binario ridotto al minimo, con minuscoli corpi luminosi, piccoli Colibrì che si posano dove necessario.	Il binario è in alluminio verniciato bianco opaco o nero opaco ed è disponibile nelle misure di 1 m, 2 m e 3 m. Sono disponibili diversi accessori di aggregazione e sospensione. La base del proiettore è in policarbonato nero opaco. Il proiettore è in alluminio anodizzato nero opaco ed è orientabile in tutte le direzioni.	Il binario funziona a 48V DC ed è componibile.

Finish	.04 Matt Black
--------	----------------

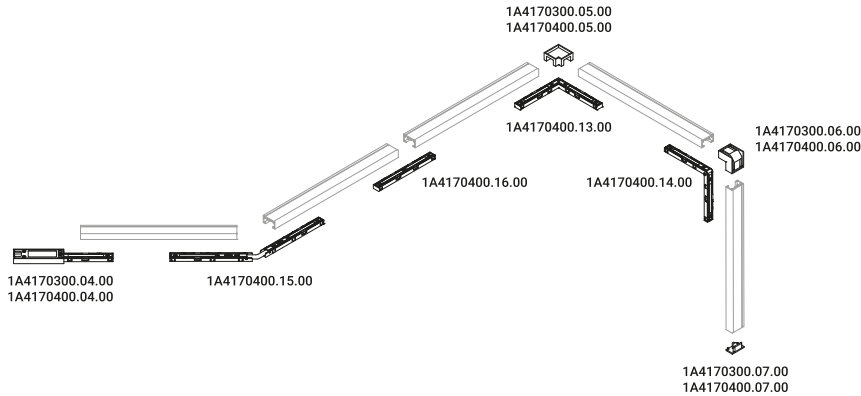COLIBRÌ
Layout example of
wall and ceiling version




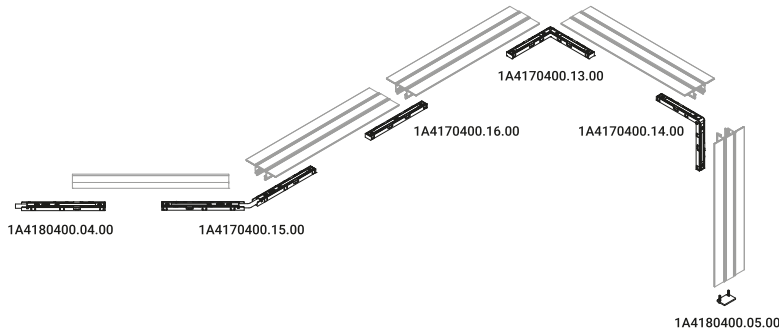COLIBRÌ
Layout example of
recessed version



Compulsory accessories / Accessori obbligatori

Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto




Wall and ceiling track - 1 m / Binario da parete e soffitto - 1 m		Not included
Matt White	1A4170300.01.00	
Matt Black	1A4170400.01.00	

Wall and ceiling track - 2 m / Binario da parete e soffitto - 2 m		Not included
Matt White	1A4170300.02.00	
Matt Black	1A4170400.02.00	

Wall and ceiling track - 3 m / Binario da parete e soffitto - 3 m		Not included
Matt White	1A4170300.03.00	
Matt Black	1A4170400.03.00	


Power connector / Elemento di alimentazione		Not included
Matt White	1A4170300.04.00	
Matt Black	1A4170400.04.00	



End cap / Tappo di chiusura		Not included
Matt White	1A4170300.07.00	
Matt Black	1A4170400.07.00	



Installation kits for recessed track / Kit d'installazione per binario da incasso



Recessed wall and ceiling track - 1 m / Binario da parete e soffitto da incasso - 1 m		Not included
Matt Black	1A4180400.01.00	

Recessed wall and ceiling track - 2 m / Binario da parete e soffitto da incasso - 2 m		Not included
Matt Black	1A4180400.02.00	

Recessed wall and ceiling track - 3 m / Binario da parete e soffitto da incasso - 3 m		Not included
Matt Black	1A4180400.03.00	

Power connector / Elemento di alimentazione		Not included
Matt Black	For recessed track	1A4180400.04.00




End cap / Tappo di chiusura		Not included
Matt Black	For recessed track	1A4180400.05.00




Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver with optoisolator / Alimentatore con optoisolatore		Not included
Input 100-240V - 50/60Hz	1A4170000.19.00	
Output 48V - 60W - IP20 - DALI		



Driver with optoisolator / Alimentatore con optoisolatore		Not included
Input 100-240V - 50/60Hz	1A2810000.11.00	
Output 48V - 150W - IP20 - DALI		

Optional accessories / Accessori opzionali


Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto




Corner joint cover H / Coprigiunto angolare H		Not included
Matt White	For wall and ceiling track	1A4170300.05.00
Matt Black	For wall and ceiling track	1A4170400.05.00



Corner joint cover V / Coprigiunto angolare V		Not included
Matt White	For wall and ceiling track	1A4170300.06.00
Matt Black	For wall and ceiling track	1A4170400.06.00




Cover - 3 m / Copertura - 3 m		Not included
Matt White	For wall and ceiling track	1A4170300.08.00
Matt Black	For wall and ceiling track	1A4170400.08.00



Endless connector / Connettore Endless		Not included
Standard	For wall and ceiling track	1A4170000.20.00

Installation kits for recessed track / Kit d'installazione per binario da incasso




Cover - 3 m / Copertura - 3 m		Not included
Matt White	For recessed track	1A4180300.08.00
Matt Black	For recessed track	1A4180400.08.00

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione



L connector / Connettore a L		Not included
Matt Black	1A4170400.13.00	




Ceiling-wall connector / Connettore soffitto-parete		Not included
Matt Black	1A4170400.14.00	



Flexible joint / Giunto flessibile		Not included
Matt Black	1A4170400.15.00	




Linear connector / Connettore lineare		Not included
Matt Black	1A4170400.16.00	




Locking tool / Strumento per bloccaggio		Not included
Standard	1A4170000.17.00	

Other accessories / Altri accessori




Shelf / Mensola		Not included
Matt Black	For wall and ceiling track	1A4170400.21.00

Compulsory accessories / Accessori obbligatori
Luminaires / Corpi illuminanti




COLIBRÌ 18 - 15°
2W - 0,05A
48V DC
2700K - 81lm / 3000K - 84lm
CRI >90
Beam 15°
Driver integrated
DALI
CE IP20 ENEC

Matt Black - 2700K - DALI	1A4260400.27.01
Matt Black - 3000K - DALI	1A4260400.30.01




COLIBRÌ 18 - 25°
2W - 0,05A
48V DC
2700K - 79lm / 3000K - 81lm
CRI >90
Beam 25°
Driver integrated
DALI
CE IP20 ENEC

Matt Black - 2700K - DALI	1A4270400.27.01
Matt Black - 3000K - DALI	1A4270400.30.01



COLIBRÌ 28 - 15°
4W - 0,10A
48V DC
2700K - 147lm / 3000K - 151lm
CRI >90
Beam 15°
Driver integrated
DALI
CE IP20 ENEC

Matt Black - 2700K - DALI	1A4280400.27.01
Matt Black - 3000K - DALI	1A4280400.30.01



COLIBRÌ 28 - 25°
5W - 0,13A
48V DC
2700K - 250lm / 3000K - 258lm
CRI >90
Beam 25°
Driver integrated
DALI
CE IP20 ENEC


Matt Black - 2700K - DALI	1A4290400.27.01
Matt Black - 3000K - DALI	1A4290400.30.01



Recessed, wall or ceiling lighting system with direct light for indoor use.	A minimal track system.	The track is in matt black painted aluminium and is available in 2 m lengths. A range of connection and suspension accessories is available. The spotlight base is in matt black or matt white polycarbonate. The spotlight is in textured matt black or matt white painted aluminium, or polished gold galvanised alluminium, and is adjustable in all directions. A range of light control accessories is available.	The track is powered at 48V DC and is modular.
Sistema di illuminazione da incasso, da soffitto o da parete, a luce diretta, per interni.	Un sistema a binario ridotto al minimo.	Il binario è in alluminio verniciato nero opaco ed è disponibile da 2 m di lunghezza. Sono disponibili diversi accessori di aggregazione e sospensione. La base del proiettore è in policarbonato bianco opaco o nero opaco. Il proiettore è in alluminio verniciato bianco opaco o nero opaco texturizzato o galvanizzato oro lucido ed è orientabile in tutte le direzioni. Sono disponibili diversi accessori per il controllo della luce.	Il binario funziona a 48V DC ed è componibile.


Finish	.03	Matt White	.04	Matt Black
	.49	Matt Black/Polished Gold		

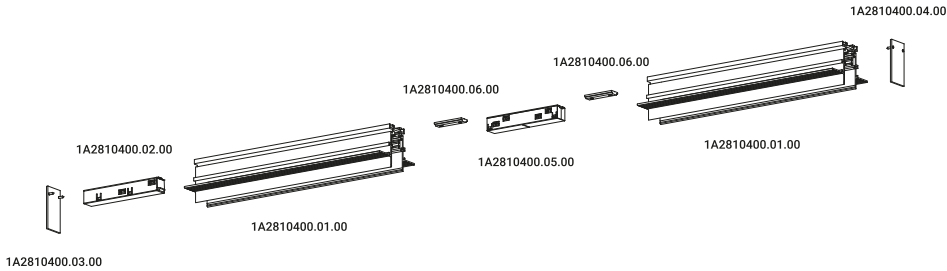FRAMELESS
Layout example



Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Plasterboard track 12,5 mm / Binario per cartongesso 12,5 mm		Not included
Matt Black	48V DC - Max 15A Length 2000 mm Cut-out 2000x26 mm	1A2810400.01.00



Power connector / Elemento di alimentazione		Not included
Matt Black	Output 48V - Max 15A	1A2810400.02.00




End cap for power connector / Tappo di chiusura per alimentazione		Not included
Matt Black		1A2810400.03.00



End cap / Tappo di chiusura		Not included
Matt Black		1A2810400.04.00


Drivers / Alimentatori




Driver / Alimentatore		Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver with optoisolator / Alimentatore con optoisolatore		Not included
	Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI	1A2810000.11.00



Driver with optoisolator / Alimentatore con optoisolatore		Not included
	Input 100-240V - 50/60Hz Output 48V - 320W - IP20 - DALI	1A2810000.12.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Linear connector / Connettore lineare		Not included
Matt Black	Output 48V - Max 15A	1A2810400.05.00



Reinforcing bracket / Staffa di rinforzo		Not included
Matt Black		1A2810400.06.00




Clamp with M6 grippe / Morsetto con pinza M6		Not included
		1A2810000.07.00



Suspension set / Set sospensione		Not included
		1A2810000.08.00




Plaster installation guard / Protezione per installazione cartongesso		Not included
	Length 2000 mm	1A2810000.09.00



Cutting tool / Tronchese per taglio		Not included
		1A2800000.17.00

Compulsory accessories / Accessori obbligatori

Luminaires / Corpi illuminanti



DOT FRAMELESS

13W
48V DC
2700K / 3000K
CRI >97
Driver integrated
DALI



Matt White - 2700K - DALI	1A0090300.27.01
Matt White - 3000K - DALI	1A0090300.30.01
Matt Black - 2700K - DALI	1A0090400.27.01
Matt Black - 3000K - DALI	1A0090400.30.01
Matt Black/Polished Gold - 2700K - DALI	1A0094900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A0094900.30.01

Other accessories / Altri accessori



Lens / Lente		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT FRAMELESS	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT FRAMELESS	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT FRAMELESS	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT FRAMELESS	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape			Not included
	DOT FRAMELESS	1X0080400.01.00	



Elliptical filter / Filtro ellittico			Not included
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.02.00



Blue filter / Filtro blu			Not included
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.03.00



Red filter / Filtro rosso			Not included
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.04.00




Yellow filter / Filtro giallo			Not included
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.05.00




Suspension, wall or ceiling lighting system with direct light for indoor use.	Track system with a range of available luminaires.	The matt white or matt black painted aluminium track is available in 1 m, 2 m and 3 m lengths. A range of connection and suspension accessories is available. The luminaires dedicated to this system have a matt white or matt black polycarbonate base. The projector is made of matt black or matt white painted aluminium. DOT, DOT 51, MIRA, and SPOT models are also available with a matt gold galvanized projector. All models are fully adjustable. A range of light control accessories is available.	The track runs on mains voltage (three-phase) and is modular. The system is compatible with a wide range of luminaires: D10, D11, D12, DOT, DOT 51, MIRA, and SPOT in their dedicated versions.
Sistema di illuminazione a sospensione o da soffitto o da parete, a luce diretta, per interni.	Un sistema a binario con vari corpi luminosi disponibili.	Il binario è in alluminio verniciato bianco opaco o nero opaco ed è disponibile nelle misure di 1 m, 2 m e 3 m. Sono disponibili diversi accessori di aggregazione e sospensione. Gli apparecchi dedicati a questo sistema hanno la base in policarbonato bianco opaco o nero opaco. Il proiettore è in alluminio verniciato nero opaco o bianco opaco. I modelli DOT, DOT 51, MIRA e SPOT sono disponibili anche con il proiettore galvanizzato oro opaco. Tutti i modelli sono orientabili in tutte le direzioni. Sono disponibili diversi accessori per il controllo della luce.	Il binario funziona a tensione di rete (trifase) ed è componibile. Il sistema è compatibile con i modelli: D10, D11, D12, DOT, DOT 51, MIRA e SPOT nelle versioni dedicate.

Finish	.03 Matt White	.04 Matt Black
	.39 Matt White/Polished Gold	.49 Matt Black/Polished Gold

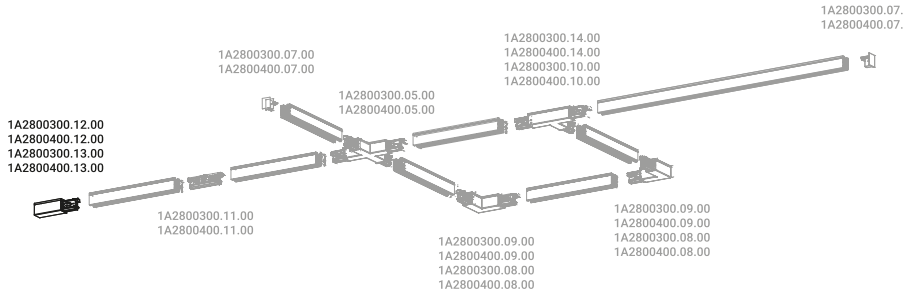
BINARIO TRIFASE
Power right connector
and power left connector
installation



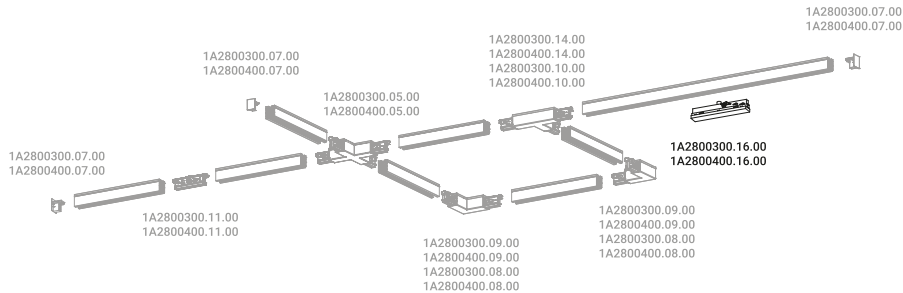BINARIO TRIFASE
Power intermediate
connector installation



Compulsory accessories / Accessori obbligatori
Installation kits / Kit d'installazione



Track 1 m / Binario 1 m	Not included
Matt White	1A2800300.01.00
Matt Black	1A2800400.01.00

Track 2 m / Binario 2 m	Not included
Matt White	1A2800300.02.00
Matt Black	1A2800400.02.00

Track 3 m / Binario 3 m	Not included
Matt White	1A2800300.03.00
Matt Black	1A2800400.03.00

End cap / Tappo di chiusura	Not included
Matt White	1A2800300.07.00
Matt Black	1A2800400.07.00

Power right connector / Elemento di alimentazione destro	Not included
Matt White	1A2800300.13.00
Matt Black	1A2800400.13.00

Power left connector / Elemento di alimentazione sinistro	Not included
Matt White	1A2800300.12.00
Matt Black	1A2800400.12.00

Power intermediate connector / Elemento di alimentazione intermedio	Not included
Matt White	1A2800300.16.00
Matt Black	1A2800400.16.00

Connectors / Connettori



Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Linear jointing connector / Connettore lineare passante		Not included
Matt White	1A2800300.11.00	
Matt Black	1A2800400.11.00	



Linear insulating connector / Connettore lineare isolante		Not included
Matt White	1A2800300.19.00	
Matt Black	1A2800400.19.00	



Internal L connector / Connettore L interno		Not included
Matt White	1A2800300.09.00	
Matt Black	1A2800400.09.00	



External L connector / Connettore L esterno		Not included
Matt White	1A2800300.08.00	
Matt Black	1A2800400.08.00	



Right T connector / Connettore T destro		Not included
Matt White	1A2800300.14.00	
Matt Black	1A2800400.14.00	



Left T connector / Connettore T sinistro		Not included
Matt White	1A2800300.10.00	
Matt Black	1A2800400.10.00	



X connector / Connettore X		Not included
Matt White	1A2800300.15.00	
Matt Black	1A2800400.15.00	



Adjustable suspension cable / Cavo di sospensione regolabile		Not included
Length 1500 mm	1A2800000.04.00	
Length 3000 mm	1A2800000.05.00	
Length 5000 mm	1A2800000.06.00	




Cutting tool / Tronchese per taglio		Not included
	1A2800000.17.00	




Compulsory accessories / Accessori obbligatori

Luminaires / Corpi illuminanti




D10 BINARIO
13W
220-240V - 50/60Hz
2700K - 266lm / 366lm
3000K - 316lm / 436lm
CRI >90
Beam 16°/ 36°
UGR <19
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI	1A6250300.27.01
Matt White - 3000K - DALI	1A6250300.30.01
Matt Black - 2700K - DALI	1A6250400.27.01
Matt Black - 3000K - DALI	1A6250400.30.01




D11 BINARIO
21W
220-240V - 50/60Hz
2700K / 3000K
CRI >90
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI	1A6270300.27.01
Matt White - 3000K - DALI	1A6270300.30.01
Matt Black - 2700K - DALI	1A6270400.27.01
Matt Black - 3000K - DALI	1A6270400.30.01




D12 BINARIO
29W
220-240V - 50/60Hz
2700K / 3000K
CRI >90
UGR <19
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI	1A6290300.27.01
Matt White - 3000K - DALI	1A6290300.30.01
Matt Black - 2700K - DALI	1A6290400.27.01
Matt Black - 3000K - DALI	1A6290400.30.01




DOT BINARIO
13W
220-240V - 50/60Hz
2700K / 3000K
CRI >97
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI	1A2290300.27.01
Matt White - 3000K - DALI	1A2290300.30.01
Matt Black - 2700K - DALI	1A2290400.27.01
Matt Black - 3000K - DALI	1A2290400.30.01
Matt White/Polished Gold - 2700K - DALI	1A2293900.27.01
Matt White/Polished Gold - 3000K - DALI	1A2293900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A2294900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A2294900.30.01




DOT BINARIO 51
Max 10W
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Matt White - ON/OFF	1A3710300.00.00
Matt Black - ON/OFF	1A3710400.00.00
Matt White/Polished Gold - ON/OFF	1A3713900.00.00
Matt Black/Polished Gold - ON/OFF	1A3714900.00.00



MIRA BINARIO
8W
220-240V - 50/60Hz
2700K - 327lm / 3000K - 352lm
CRI >90
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI	1A0490300.27.01
Matt White - 3000K - DALI	1A0490300.30.01
Matt Black - 2700K - DALI	1A0490400.27.01
Matt Black - 3000K - DALI	1A0490400.30.01
Matt White/Polished Gold - 2700K - DALI	1A0493900.27.01
Matt White/Polished Gold - 3000K - DALI	1A0493900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A0494900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A0494900.30.01



SPOT BINARIO
21W
220-240V - 50/60Hz
Driver integrated
DALI
LED Module not included
CE IP20

Matt White - DALI	1A0280300.00.01
Matt Black - DALI	1A0280400.00.01
Matt White/Polished Gold - DALI	1A0283900.00.01
Matt Black/Polished Gold - DALI	1A0284900.00.01

Compulsory accessories / Accessori obbligatori

Other accessories / Altri accessori



Lens / Lente		Not included	
Beam - 15°	2700K - CRI >90 - 1607lm	D11 BINARIO	1X0170000.02.00
	3000K - CRI >90 - 1681lm		
Beam - 24°	2700K - CRI >90 - 1624lm	D11 BINARIO	1X0170000.03.00
	3000K - CRI >90 - 1699lm		
Beam - 38°	2700K - CRI >90 - 1683lm	D11 BINARIO	1X0170000.04.00
	3000K - CRI >90 - 1761lm		
Beam - 50°	2700K - CRI >90 - 1544lm	D11 BINARIO	1X0170000.05.00
	3000K - CRI >90 - 1615lm		




Lens / Lente		Not included	
Beam - 15°	2700K - CRI >90 - 1978lm	D12 BINARIO	1X0160000.02.00
	3000K - CRI >90 - 2102lm		
Beam - 24°	2700K - CRI >90 - 2602lm	D12 BINARIO	1X0160000.03.00
	3000K - CRI >90 - 2721lm		
Beam - 38°	2700K - CRI >90 - 2662lm	D12 BINARIO	1X0160000.04.00
	3000K - CRI >90 - 2783lm		
Beam - 50°	2700K - CRI >90 - 2441lm	D12 BINARIO	1X0160000.05.00
	3000K - CRI >90 - 2552lm		




Lens / Lente		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT BINARIO	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT BINARIO	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT BINARIO	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT BINARIO	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

Compulsory accessories / Accessori obbligatori


LED modules / Moduli LED



DG111 LED module / Modulo LED DG111		Not included	
16,7W - 15° - 500mA DC	2700K - 1349lm - CRI >90	SPOT BINARIO	1A4700000.27.20
16,7W - 15° - 500mA DC	3000K - 1434lm - CRI >90		1A4700000.30.20



DG111 LED module / Modulo LED DG111		Not included	
16,7W - 22° - 500mA DC	2700K - 1859lm - CRI >90	SPOT BINARIO	1A3890000.27.20
16,7W - 22° - 500mA DC	3000K - 1943lm - CRI >90		1A3890000.30.20



DG111 LED module / Modulo LED DG111		Not included	
16,7W - 36° - 500mA DC	2700K - 1795lm - CRI >90	SPOT BINARIO	1A3900000.27.20
16,7W - 36° - 500mA DC	3000K - 1890lm - CRI >90		1A3900000.30.20



Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Honeycomb louvre / Frangiluce nido d'ape			Not included
Matt White	D11 BINARIO	1X0170300.01.00	
Matt Black	D11 BINARIO	1X0170400.01.00	



Honeycomb louvre / Frangiluce nido d'ape			Not included
Matt White	D12 BINARIO	1X0160300.01.00	
Matt Black	D12 BINARIO	1X0160400.01.00	



Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape			Not included
	DOT BINARIO	1X0080400.01.00	



Elliptical filter / Filtro ellittico			Not included
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.02.00



Blue filter / Filtro blu			Not included
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.03.00



Red filter / Filtro rosso			Not included
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.04.00



Yellow filter / Filtro giallo			Not included
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.05.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16			Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y0330500



LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580210



LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580010

Other accessories / Altri accessori



Darklight			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580040



25° beam filter / Filtro fascio 25°			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580020




36° beam filter / Filtro fascio 36°			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580030

Optional accessories / Accessori opzionali

Other accessories / Altri accessori

 73	Soft filter / Filtro soft		Not included
	Standard	SPOT BINARIO	1X0190000.03.00
 96	Louvre 1 / Frangiluce 1		Not included
	Matt Black	SPOT BINARIO	1X0190400.10.00
 96	Louvre 2 / Frangiluce 2		Not included
	Matt Black	SPOT BINARIO	1X0190400.11.00
 170	Parabola		Not included
	Matt Black	SPOT BINARIO	1X0190400.08.00
 62	Snoot		Not included
	Matt Black	SPOT BINARIO	1X0190400.09.00
 65	Louvre 3 / Frangiluce 3		Not included
	Matt Black	For Parabola - Snoot	SPOT BINARIO 1X0190400.12.00
 65	Louvre 4 / Frangiluce 4		Not included
	Matt Black	For Parabola - Snoot	SPOT BINARIO 1X0190400.13.00



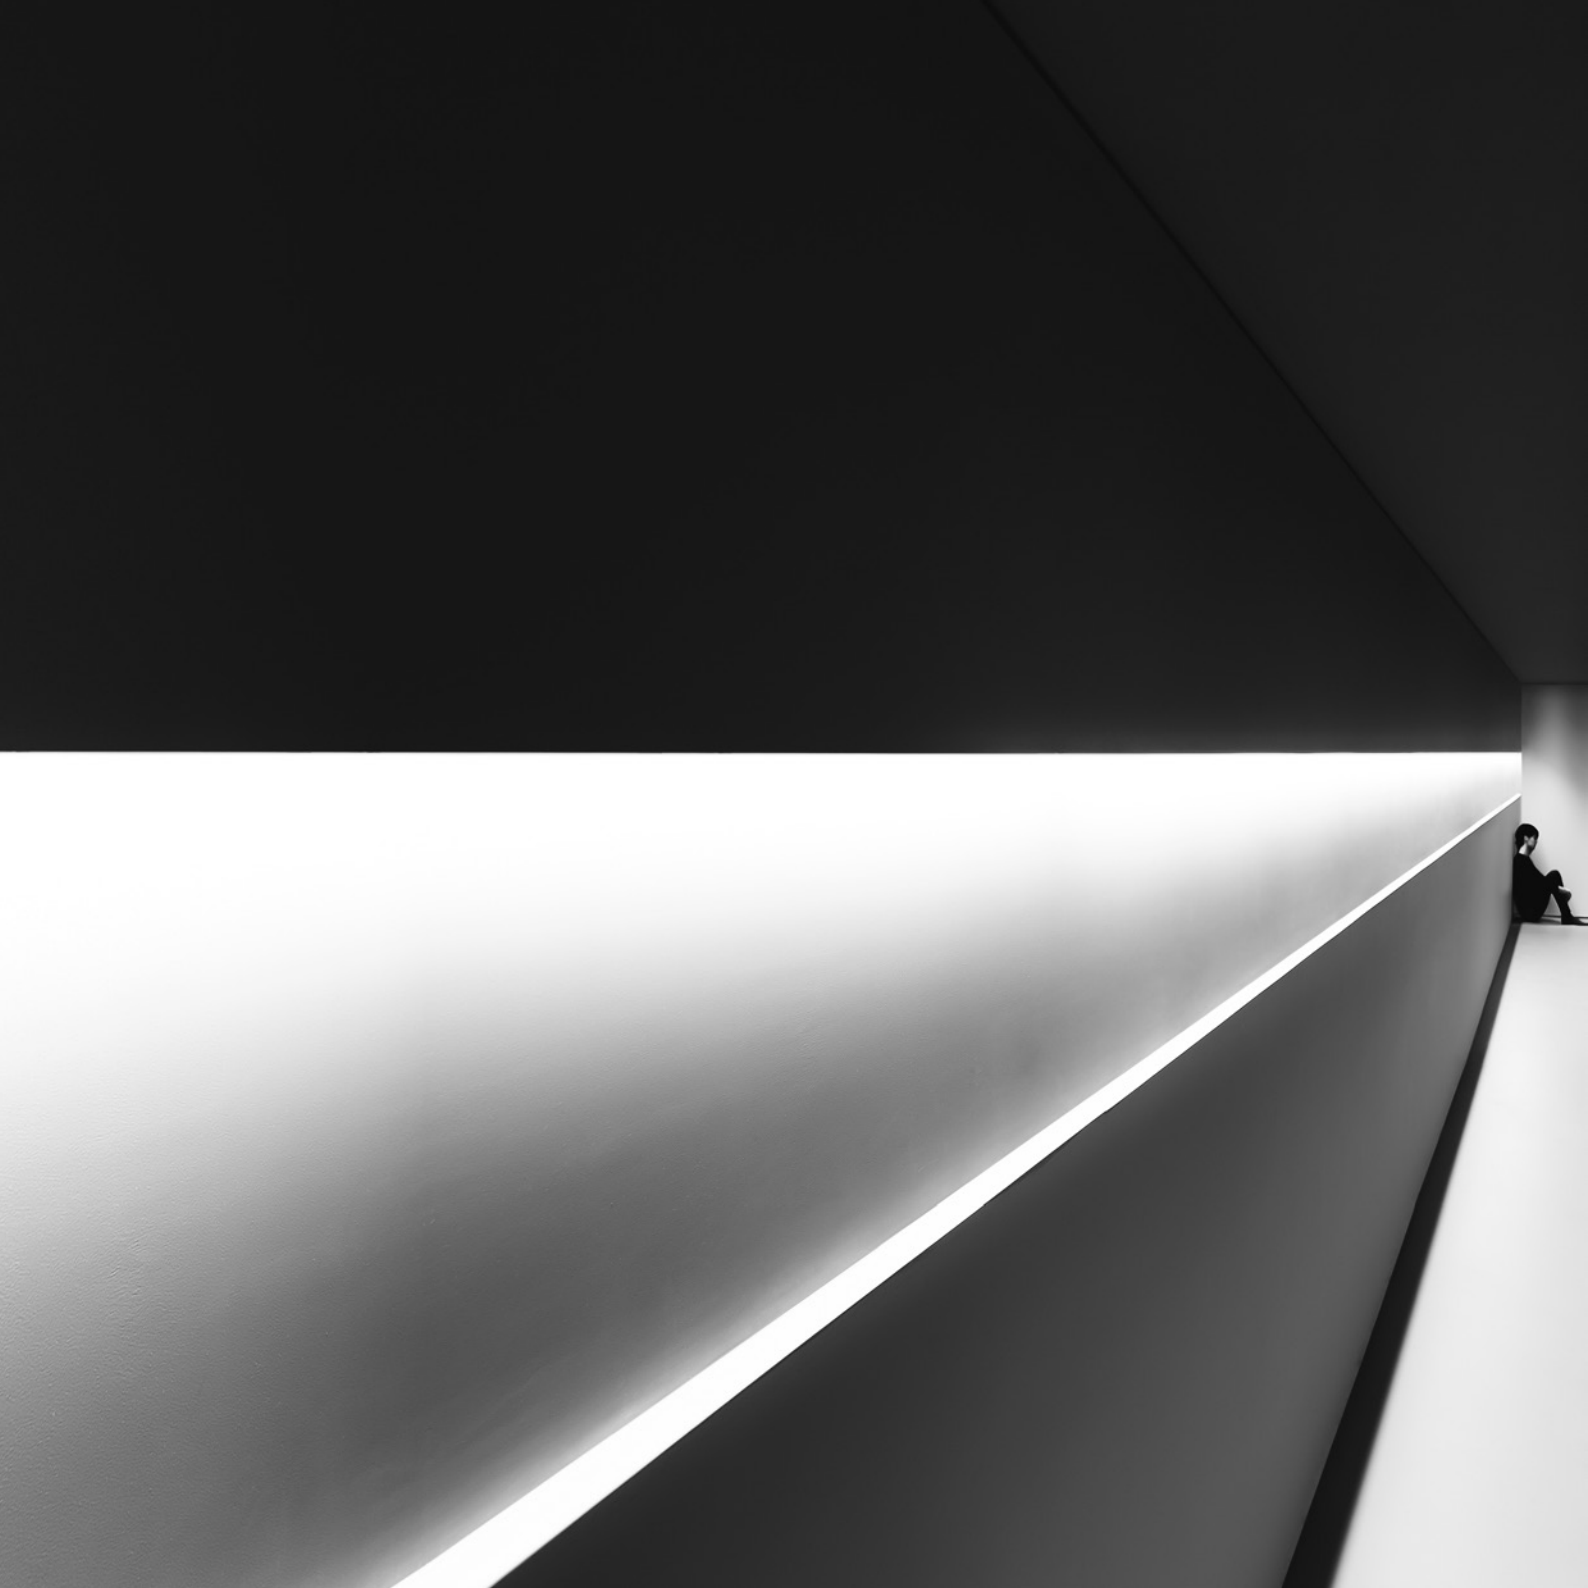


Wall or ceiling profile for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The profile is in natural anodised aluminium. The profiles can be combined.	The profile is compatible with a wide range of LED strips. The driver is not included but is available as an accessory.
Profilo da soffitto o da parete, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il profilo è in alluminio anodizzato naturale. I profili sono aggregabili.	Il profilo è compatibile con un'ampia gamma di strip LED. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.00	Standard
--------	-----	----------

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m		Not included
Standard	With opal cover	1A4970000.01.00



Cap / Tappo		Not included
Standard		1A4970000.02.00




Fixing spring / Molla di fissaggio		Not included
Standard		1A4970000.03.00

LED modules / Moduli LED




Strip LED - 5 m - IP20		Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20


Drivers / Alimentatori




Driver / Alimentatore		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440



Driver / Alimentatore		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540




Driver / Alimentatore		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500




Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010





Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m		Not included
Standard	With opal cover	1A4970000.04.00



Cap / Tappo		Not included
Standard		1A4970000.05.00




Fixing spring / Molla di fissaggio		Not included
Standard		1A4970000.06.00

LED modules / Moduli LED




Strip LED - 5 m - IP20		Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20


Drivers / Alimentatori




Driver / Alimentatore		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440



Driver / Alimentatore		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540




Driver / Alimentatore		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500




Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010



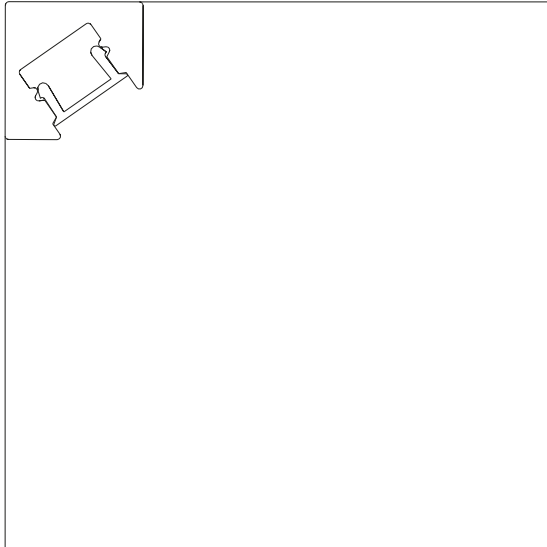


Compulsory accessories / Accessori obbligatori


Installation kits / Kit d'installazione




Aluminium profile 2 m / Profilo in alluminio 2 m	Not included
Standard	1A4970000.07.00



Opal cover 2 m / Diffusore opale 2 m	Not included
Standard	1A4970000.08.00



Transparent cover 2 m / Diffusore trasparente 2 m	Not included
Standard	1A4970000.09.00



Satin cover 2 m / Diffusore satinato 2 m	Not included
Standard	1A4970000.10.00



Cap / Tappo	Not included
Standard	1A4970000.11.00



Adhesive 1 m / Adesivo 1 m	Not included
Standard	1A4970000.12.00



Adhesive magnet 1 m / Calamita adesiva 1 m	Not included
Standard	1A4970000.13.00

Compulsory accessories / Accessori obbligatori

LED modules / Moduli LED



Strip LED - 5 m - IP20	Not included
Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20



Strip LED - 5 m - IP20	Not included
Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20
Input 24V DC - 14,4W/m - IP20 3000K - 1575lm/m - CRI >80	1A4980000.30.20




Strip LED - 5 m - IP20	Not included
Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20
Input 24V DC - 19,2W/m - IP20 3000K - 2340lm/m - CRI >80	1A4990000.30.20




Strip LED - 5 m - IP65	Not included
Input 24V DC - 14,4W/m - IP65 2700K - 1420lm/m - CRI >82	1A5000000.27.20
Input 24V DC - 14,4W/m - IP65 3000K - 1575lm/m - CRI >82	1A5000000.30.20


Drivers / Alimentatori




Driver / Alimentatore	Not included
100-240V 24V/80W/IP20/ON/OFF	1Z1120440




Driver / Alimentatore	Not included
100-240V 24V/96W/IP67/1-10V	1Z1120540



Driver / Alimentatore	Not included
100-240V 24V/150W/IP67/1-10V	1Z1120500







Controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010












Recessed profile for indoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The profile is in natural anodised aluminium. The profiles can be combined.	The profile is compatible with a wide range of LED strips. The driver is not included but is available as an accessory.
Profilo da incasso, per interni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il profilo è in alluminio anodizzato naturale. I profili sono aggregabili.	Il profilo è compatibile con un'ampia gamma di strip LED. Il driver non è incluso, ma è disponibile come accessorio.

Finish	.00 Standard
--------	-----------------


Compulsory accessories / Accessori obbligatori		
Installation kits / Kit d'installazione		
	Aluminium profile 2 m / Profilo in alluminio 2 m	Not included
	Standard	1A4970000.14.00
	Opal cover 2 m / Diffusore opale 2 m	Not included
	Standard	1A4970000.08.00
	Transparent cover 2 m / Diffusore trasparente 2 m	Not included
	Standard	1A4970000.09.00
	Satin cover 2 m / Diffusore satinato 2 m	Not included
	Standard	1A4970000.10.00
	Cap / Tappo	Not included
	Standard	1A4970000.15.00
	Fixing spring / Molla di fissaggio	Not included
	Standard	1A4970000.16.00
	Formwork kit 2 m / Kit cassaforma 2 m	Not included
	Standard	1A4970000.17.00

Compulsory accessories / Accessori obbligatori		
LED modules / Moduli LED		
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 3000K - 1575lm/m - CRI >80	1A4980000.30.20
	Strip LED - 5 m - IP65	Not included
	Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20
	Strip LED - 5 m - IP65	Not included
	Input 24V DC - 19,2W/m - IP20 3000K - 2340lm/m - CRI >80	1A4990000.30.20
Drivers / Alimentatori		
	Driver / Alimentatore	Not included
	100-240V 24V/80W/IP20/ON/OFF	1Z1120440
	Driver / Alimentatore	Not included
	100-240V 24V/96W/IP67/1-10V	1Z1120540
	Driver / Alimentatore	Not included
	100-240V 24V/150W/IP67/1-10V	1Z1120500
	Controller	Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010

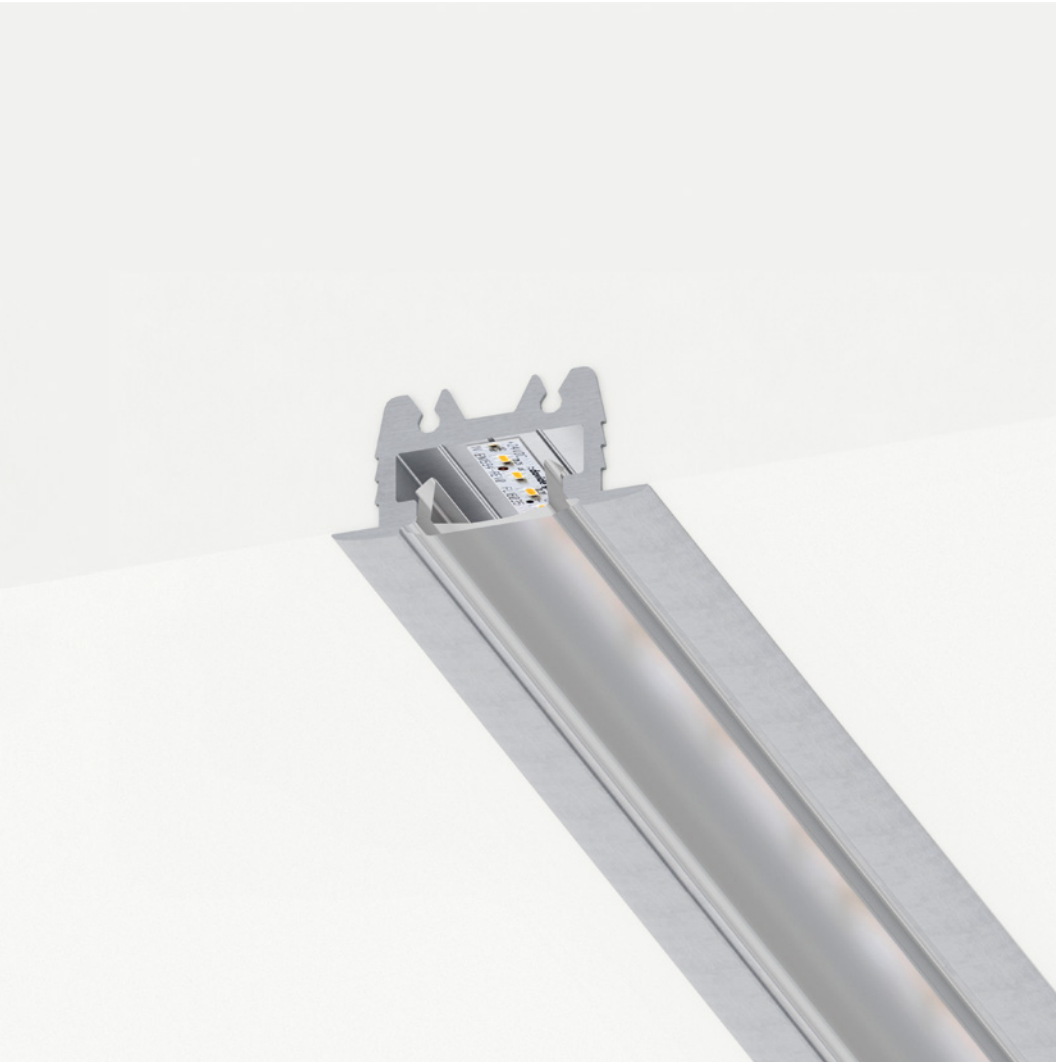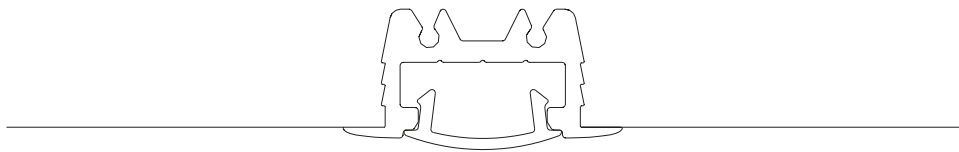

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m	Not included
Standard	1A4970000.18.00



Opal cover 2 m / Diffusore opale 2 m	Not included
Standard	1A4970000.19.00

LED modules / Moduli LED



Strip LED - 5 m - IP20	Not included
Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20



Strip LED - 5 m - IP20	Not included
Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20
Input 24V DC - 14,4W/m - IP20 3000K - 1575lm/m - CRI >80	1A4980000.30.20




Strip LED - 5 m - IP20	Not included
Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20
Input 24V DC - 19,2W/m - IP20 3000K - 2340lm/m - CRI >80	1A4990000.30.20




Strip LED - 5 m - IP65	Not included
Input 24V DC - 14,4W/m - IP65 2700K - 1420lm/m - CRI >82	1A5000000.27.20
Input 24V DC - 14,4W/m - IP65 3000K - 1575lm/m - CRI >82	1A5000000.30.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver / Alimentatore	Not included
100-240V 24V/80W/IP20/ON/OFF	1Z1120440




Driver / Alimentatore	Not included
100-240V 24V/96W/IP67/1-10V	1Z1120540



Driver / Alimentatore	Not included
100-240V 24V/150W/IP67/1-10V	1Z1120500



Controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010

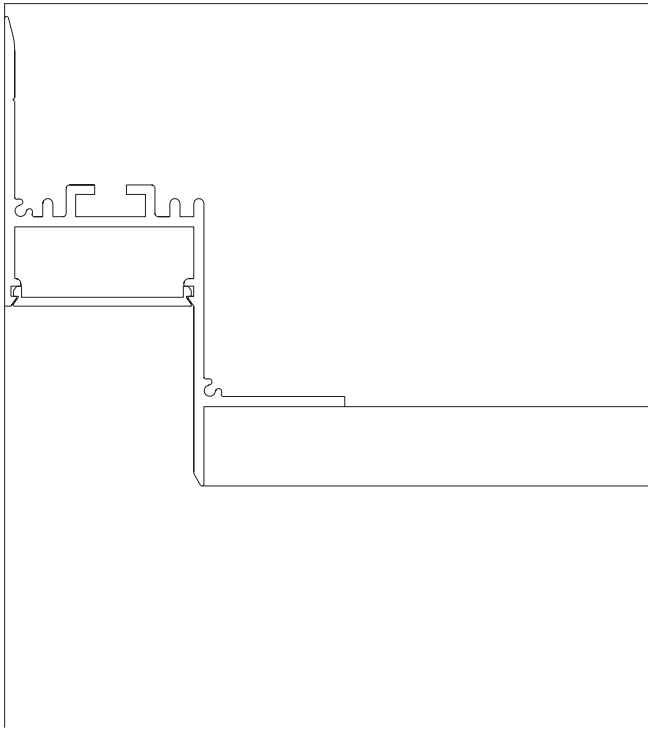




Wall or ceiling lighting system with diffuse light for indoor use.	Black becomes light.	The profile is in matt black anodised aluminium and is available in 1 m length. The system is modular. A range of connection accessories is available.	The light source consists of a matt black silicone LED strip. The electric cable is matt black and 0,3 m long. The driver is not included but is available as an accessory
Sistema di illuminazione da soffitto o da parete, a luce diffusa, per interni.	Il nero che diventa luce.	Il profilo è in alluminio anodizzato nero opaco ed è disponibile nella misura di 1 m. Il sistema è componibile. Sono disponibili diversi accessori di aggregazione.	La sorgente luminosa è costituita da una strip LED in silicone di colore nero opaco. Il cavo elettrico è di colore nero opaco e 0,3 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio.


Finish	.00	Standard
--------	-----	----------

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Aluminium profile 1 m / Profilo in alluminio 1 m		Not included
Matt Black	1A6320400.01.00	



End cap for power connector / Tappo di chiusura per alimentazione		Not included
Matt Black	1A6320400.03.00	




End cap / Tappo di chiusura		Not included
Matt Black	1A6320400.04.00	

LED modules / Moduli LED




Strip LED - 5 m		Not included
Matt Black	Input 24V DC - 14W/m - IP20 3000K - 97lm/m - CRI >90	1A6320400.02.00

Drivers / Alimentatori



Driver / Alimentatore		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440



Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010



OUTDOOR / ESTERNO



Floor luminaire with direct light for outdoor use.

A star that shines in the sky. We wanted to go further, beyond the usual meaning of a floor lamp. It is like watching a tiny miracle, an unexpected magic. A soft glow comes from far away, suggesting unforeseen solutions and indicating lost details.

The base is in painted steel and is available in a range of finishes. The stem is in painted fibreglass in a range of finishes. The joint on the base is in polished AISI 316L stainless steel. SAMPEI OUTDOOR is available in two different heights and also in the indoor version.

The light source is LED with integrated module. The electric cable is matt black and 5 m long. The driver is not included but is available as an accessory. An electric connector is available as an accessory for outdoor use. An electric connector is included for outdoor use.

Apparecchio di illuminazione da terra, a luce diretta, per esterni.

Una stella che brilla nel cielo. Siamo voluti andare oltre, superando il senso comune del significato di lampada da terra. È come assistere ad un piccolo miracolo, una magia inattesa. Un bagliore gentile che arriva da lontanissimo e che suggerisce soluzioni impreviste, indica dettagli smarriti.

La base è in acciaio verniciata in varie finiture. Lo stelo è in fibra di vetro verniciato in varie finiture. Lo snodo alla base è in AISI 316L lucido. SAMPEI OUTDOOR è disponibile in due altezze differenti e anche in versione indoor.


La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 5 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È disponibile, come accessorio, un connettore elettrico per esterni. È incluso un connettore elettrico per esterni.

Compasso d'Oro ADI
Award 2014




Finish	.03	Matt White	.04	Matt Black
	.20	Magic Blue	.35	Grey Green
	.40	Grey Beige		

 Custom finish available on request.
Finitura personalizzata su richiesta.



SAMPEI 440 OUTDOOR
8,4W
Max 700mA DC
2700K - 639lm / 3000K - 639lm
CRI >90
Driver not included
CE  **IP65**

Matt White - 2700K	1A3770300.27.20
Matt White - 3000K	1A3770300.30.20
Matt Black - 2700K	1A3770400.27.20
Matt Black - 3000K	1A3770400.30.20
Magic Blue - 2700K	1A3772000.27.20
Magic Blue - 3000K	1A3772000.30.20
Grey Green - 2700K	1A3773500.27.20
Grey Green - 3000K	1A3773500.30.20
Grey Beige - 2700K	1A3774000.27.20
Grey Beige - 3000K	1A3774000.30.20




SAMPEI XXL OUTDOOR
12,8W
Max 700mA DC
2700K - 1256lm / 3000K - 1313lm
CRI >90
Driver not included
CE  **IP65**

Matt White - 2700K	1A5330300.27.20
Matt White - 3000K	1A5330300.30.20
Matt Black - 2700K	1A5330400.27.20
Matt Black - 3000K	1A5330400.30.20
Magic Blue - 2700K	1A5332000.27.20
Magic Blue - 3000K	1A5332000.30.20
Grey Green - 2700K	1A5333500.27.20
Grey Green - 3000K	1A5333500.30.20
Grey Beige - 2700K	1A5334000.27.20
Grey Beige - 3000K	1A5334000.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00





Floor luminaire with direct light for outdoor use.	Light as a tool for guiding people along pathways or for creating depth.	The stem is in AISI 316L stainless steel. The spotlight is in textured matt black painted aluminium and is adjustable in all directions. Each pole can host one or two spotlights. An additional spotlight can be purchased separately. It is fixed to the ground with a textured matt black painted aluminium flange. An anchoring bolt accessory is available for lawns.	The light source is LED with integrated module. The electric cable is matt black and 7 m long. The driver is not included but is available as an accessory. An electric connector is included for outdoor use.
Apparecchio di illuminazione da terra, a luce diretta, per esterni.	La luce come strumento per condurre le persone lungo i percorsi o creare profondità.	Lo stelo è in AISI 316L. Il proiettore è in alluminio verniciato nero opaco texturizzato ed è orientabile in tutte le direzioni. Ogni palo può ospitare fino a due proiettori. Un proiettore addizionale può essere acquistato separatamente. Il fissaggio al suolo avviene mediante una flangia in alluminio verniciato nero opaco texturizzato. È disponibile l'accessorio tirafondo per i terreni erbosi.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 7 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È incluso un connettore elettrico per esterni.

Finish	.00	Standard
		Custom finish available on request (LED head only). Finitura personalizzata su richiesta (solo per testa LED).




BUBKA

8,4W
Max 700mA DC
2700K - 639lm / 3000K - 639lm
CRI >90
Driver not included
CE IP65

Standard - 2700K	1A3600000.27.20
Standard - 3000K	1A3600000.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00



Anchoring bolt / Tirafondo	Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm	1A3620000.00.00

Lighting modules / Corpi illuminanti




Additional LED head / Testa LED supplementare		Not included
Matt Black	Max 700mA DC - 8,4W 3000K - 639lm - CRI >90	1A3610400.30.20
	Max 700mA DC - 8,4W 2700K - 639lm - CRI >90	1A3610400.27.20





Floor luminaire with direct light for outdoor use.	Light as a tool for guiding people along pathways or for creating depth.	The stem is in AISI 316L stainless steel. The spotlight is in textured matt black painted aluminium and is adjustable in all directions. Each pole can host one or two spotlights. An additional spotlight can be purchased separately. It is fixed to the ground with a textured matt black painted aluminium flange. An anchoring bolt accessory is available for lawns.	The light source is LED with integrated module. The electric cable is matt black and 9 m long. The driver is not included but is available as an accessory. An electric connector is included for outdoor use.
Apparecchio di illuminazione da terra, a luce diretta, per esterni.	La luce come strumento per condurre le persone lungo i percorsi o creare profondità.	Lo stelo è in AISI 316L. Il proiettore è in alluminio verniciato nero opaco texturizzato ed è orientabile in tutte le direzioni. Ogni palo può ospitare fino a due proiettori. Un proiettore addizionale può essere acquistato separatamente. Il fissaggio al suolo avviene mediante una flangia in alluminio verniciato nero opaco texturizzato. È disponibile l'accessorio tirafondo per i terreni erbosi.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 9 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È incluso un connettore elettrico per esterni.

Finish	.00 Standard
	 Custom finish available on request (LED head only). Finitura personalizzata su richiesta (solo per testa LED).




BUBKA BOLLARD

8,4W
Max 700mA DC
2700K - 350lm / 3000K - 350lm
CRI >90
Driver not included
CE IP65

Standard - 2700K	1A1440000.27.20
Standard - 3000K	1A1440000.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore	Not included
220-240V(100-127V) 350mA/17W(15W)/IP68/ON/OFF	1Z0240880

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00



Anchoring bolt / Tirafondo	Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm	1A3620000.00.00

Lighting modules / Corpi illuminanti



Additional LED head / Testa LED supplementare	Not included
Matt Black	
Max 700mA DC - 8,4W 2700K - 639lm - CRI >90	1A3610400.27.20
Max 700mA DC - 8,4W 3000K - 639lm - CRI >90	1A3610400.30.20






Floor luminaire with direct light for outdoor use.	A small luminous elf that you can install in your garden or inside a vase. For illuminating a flower, a plant or simply to accompany us along a path.	The stem is in AISI 316L stainless steel. The spotlight is in matt black anodised aluminium and is adjustable in all directions. Each stem can host one or two spotlights. An additional spotlight can be purchased separately. It is fixed in the ground with a stake.	The light source is LED with integrated module. The electric cable is matt black and 5 m long. The driver is not included but is available as an accessory. An electric connector is included for outdoor use.
--	---	---	---

Apparecchio di illuminazione da terra, a luce diretta, per esterni.	Un piccolo elfo luminoso da installare in giardino o all'interno di un vaso. Per illuminare un fiore, una pianta o semplicemente per accompagnare un percorso.	Lo stelo è in AISI 316L. Il proiettore è in alluminio anodizzato nero opaco ed è orientabile in tutte le direzioni. Ogni stelo può ospitare fino a due proiettori. Un proiettore aggiuntivo può essere acquistato separatamente. Il fissaggio al suolo avviene mediante un picchetto.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 5 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È incluso un connettore elettrico per esterni.
---	--	---	--

Finish	.04 Matt Black
--------	----------------




GRILLO

4,2W
24V DC
2700K - 262lm / 3000K - 282lm
CRI >90
Driver not included
CE IP67

Matt Black - 2700K	1A3570400.27.20
Matt Black - 3000K	1A3570400.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00



Additional stem 1 m / Stelo supplementare 1 m		Not included
Standard	AISI 316L stainless steel	1A3590000.00.00

Lighting modules / Corpi illuminanti



Additional LED head / Testa LED supplementare		Not included
Matt Black	24V DC - 4,2W	1A3580400.27.20
	2700K - 262lm - CRI >90	
	24V DC - 4,2W	1A3580400.30.20
	3000K - 282lm - CRI >90	





Floor luminaire with indirect light for outdoor use.

From the Latin "origo", start, birth, source.
It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner.
Mysterious and enigmatic, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light.

The base is in textured matt black painted steel.
The stem is in matt black fibreglass.
ORIGINE OUTDOOR is also available in the indoor version.

The light source is LED with integrated module.
The electric cable is matt black and 5 m long.
The driver is not included but is available as an accessory.
An electric connector is included for outdoor use.

Apparecchio di illuminazione da terra, a luce indiretta, per esterni.

Dal latino "origo", inizio, nascita, fonte.
Evoca un germoglio che emerge dalla terra e si slancia verso il cielo, lo stelo che diventa sempre più sottile.
Misteriosa ed enigmatica, unisce il fascino dell'incognito al piacere di una luce d'ambiente sofisticata ed elegante.

La base è in acciaio verniciata nero opaco texturizzato.
Lo stelo è in fibra di vetro nero opaco.
ORIGINE OUTDOOR è disponibile anche in versione indoor.

La sorgente luminosa è a LED e a modulo integrato.
Il cavo elettrico è di colore nero opaco e 5 m di lunghezza.
Il driver non è incluso, ma è disponibile come accessorio.
È incluso un connettore elettrico per esterni.

Finish

.04 Matt Black




Custom finish available on request.
Finitura personalizzata su richiesta.



ORIGINE OUTDOOR		
	35W	
	24V DC	
	2700K - 2872lm / 3000K - 2930lm	
	CRI >80	
	Driver not included	
	CE IP65	

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
100-240V	24V/60W/IP67/1-10V	1Z1120260

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00





Recessed luminaire with direct light for outdoor use.	A small black dot that reveals its function only when necessary.	The body is in matt black anodised aluminium. The glass is available with transparent or black finish. BUIO is available in the trim version, with visible edge, and the trimless version, without trim. BUIO is not adjustable. The specific formwork is required for recessed in-ground installation, while the specific fixing spring is required for recessed ceiling (plasterboard) installation.	The light source is LED with integrated module. The electric cable is matt black and 1 m long. The driver is not included but is available as an accessory. An electric connector is included for outdoor use.
Apparecchio di illuminazione da incasso, a luce diretta, per esterni.	Un piccolo punto nero che svela la sua funzione solo quando necessario.	Il corpo è in alluminio anodizzato nero opaco. Il vetro è disponibile trasparente o nero. BUIO è disponibile nella versione trim, con bordo visibile, e trimless, senza battuta. BUIO non è orientabile. Per l'installazione ad incasso a terra è obbligatorio l'utilizzo dell'apposita cassaforma mentre per l'installazione ad incasso a soffitto (cartongesso) è obbligatorio l'utilizzo dell'apposita molla di fissaggio.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 1 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È incluso un connettore elettrico per esterni.




BUIO TRIM - 13°

Black filter
6,4W
24V DC
2700K - 93lm / 3000K - 93lm
CRI >90
Beam 13°
UGR <19
Driver not included



Matt Black - 2700K	1A5120400.27.20
Matt Black - 3000K	1A5120400.30.20




BUIO TRIM - 25°

Black filter
6,4W
24V DC
2700K - 158lm / 3000K - 158lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K	1A5140400.27.20
Matt Black - 3000K	1A5140400.30.20




BUIO TRIM - 32°

Black filter
6,4W
24V DC
2700K - 144lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included



Matt Black - 2700K	1A5130400.27.20
Matt Black - 3000K	1A5130400.30.20




BUIO TRIM ELLIPTICAL

Black filter
6,4W
24V DC
2700K - 91lm / 3000K - 91lm
CRI >90
UGR <19
Driver not included



Matt Black - 2700K	1A5150400.27.20
Matt Black - 3000K	1A5150400.30.20




BUIO TRIM - 13°

Transparent filter
6,4W
24V DC
2700K - 247lm / 3000K - 247lm
CRI >90
Beam 13°
UGR <19
Driver not included



Matt Black - 2700K	1A5160400.27.20
Matt Black - 3000K	1A5160400.30.20




BUIO TRIM - 25°

Transparent filter
6,4W
24V DC
2700K - 257lm / 3000K - 257lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K	1A5180400.27.20
Matt Black - 3000K	1A5180400.30.20




BUIO TRIM - 32°

Transparent filter
6,4W
24V DC
2700K - 297lm / 3000K - 297lm
CRI >90
Beam 32°
UGR <19
Driver not included



Matt Black - 2700K	1A5170400.27.20
Matt Black - 3000K	1A5170400.30.20




BUIO TRIM ELLIPTICAL

Transparent filter
6,4W
24V DC
2700K - 233lm / 3000K - 233lm
CRI >90
UGR <19
Driver not included



Matt Black - 2700K	1A5190400.27.20
Matt Black - 3000K	1A5190400.30.20




BUIO TRIMLESS - 13°

Black filter
6,4W
24V DC
2700K - 93lm / 3000K - 93lm
CRI >90
Beam 13°
UGR <19
Driver not included



Matt Black - 2700K	1A5200400.27.20
Matt Black - 3000K	1A5200400.30.20




BUIO TRIMLESS - 25°

Black filter
6,4W
24V DC
2700K - 158lm / 3000K - 158lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K	1A5220400.27.20
Matt Black - 3000K	1A5220400.30.20




BUIO TRIMLESS - 32°

Black filter
6,4W
24V DC
2700K - 144lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included



Matt Black - 2700K	1A5210400.27.20
Matt Black - 3000K	1A5210400.30.20




BUIO TRIMLESS ELLIPTICAL

Black filter
6,4W
24V DC
2700K - 91lm / 3000K - 91lm
CRI >90
UGR <19
Driver not included



Matt Black - 2700K	1A5230400.27.20
Matt Black - 3000K	1A5230400.30.20




BUIO TRIMLESS - 13°

Transparent filter
6,4W
24V DC
2700K - 247lm / 3000K - 247lm
CRI >90
Beam 13°
UGR <19
Driver not included



Matt Black - 2700K	1A5240400.27.20
Matt Black - 3000K	1A5240400.30.20




BUIO TRIMLESS - 25°

Transparent filter
6,4W
24V DC
2700K - 257lm / 3000K - 257lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K	1A5260400.27.20
Matt Black - 3000K	1A5260400.30.20




BUIO TRIMLESS - 32°

Transparent filter
6,4W
24V DC
2700K - 297lm / 3000K - 297lm
CRI >90
Beam 32°
UGR <19
Driver not included



Matt Black - 2700K	1A5250400.27.20
Matt Black - 3000K	1A5250400.30.20



BUIO TRIMLESS ELLIPTICAL


Transparent filter
6,4W
24V DC
2700K - 233lm / 3000K - 233lm
CRI >90
UGR <19
Driver not included



Matt Black - 2700K	1A5270400.27.20
Matt Black - 3000K	1A5270400.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione




Installation box / Cassaforma			Not included
Standard	For in-ground installation	1A5280000.00.00	



Ceiling spring / Molla da soffitto			Not included
Standard	For recessed installation on plasterboard ceilings	BUIO TRIM	1A6310000.00.00

Drivers / Alimentatori



Driver / Alimentatore			Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620	

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68			Included
	1 Piece	1A1660000.00.00	





Wall or ceiling or floor luminaire with direct light for outdoor use.	A small black dot that reveals its function only when necessary.	The body is in matt black anodised aluminium. The fixing elements are in AISI 316 stainless steel. The glass is available with transparent or black finish. BUIO - SPOT is adjustable in one direction. A range of installation accessories are available.	The light source is LED with integrated module. The electric cable is matt black and 1 m long. The driver is not included but is available as an accessory. An electric connector is included for outdoor use.
Apparecchio di illuminazione da parete o da soffitto o da terra, a luce diretta, per esterni.	Un piccolo punto nero che svela la sua funzione solo quando necessario.	Il corpo è in alluminio anodizzato nero opaco. Gli elementi di fissaggio sono in AISI 316. Il vetro è disponibile trasparente o nero. BUIO - SPOT è orientabile in una direzione. Sono disponibili diversi accessori d'installazione.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 1 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È incluso un connettore elettrico per esterni.




BUIO - 13°

Black filter
6,4W
24V DC
2700K - 93lm / 3000K - 93lm
CRI >90
Beam 13°
UGR <19
Driver not included



Matt Black - 2700K	1A5040400.27.20
Matt Black - 3000K	1A5040400.30.20




BUIO - 25°

Black filter
6,4W
24V DC
2700K - 158lm / 3000K - 158lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K	1A5060400.27.20
Matt Black - 3000K	1A5060400.30.20




BUIO - 32°

Black filter
6,4W
24V DC
2700K - 144lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included



Matt Black - 2700K	1A5050400.27.20
Matt Black - 3000K	1A5050400.30.20




BUIO ELLIPTICAL

Black filter
6,4W
24V DC
2700K - 91lm / 3000K - 91lm
CRI >90
UGR <19
Driver not included



Matt Black - 2700K	1A5070400.27.20
Matt Black - 3000K	1A5070400.30.20




BUIO - 13°

Transparent filter
6,4W
24V DC
2700K - 247lm / 3000K - 247lm
CRI >90
Beam 13°
UGR <19
Driver not included



Matt Black - 2700K	1A5080400.27.20
Matt Black - 3000K	1A5080400.30.20




BUIO - 25°

Transparent filter
6,4W
24V DC
2700K - 257lm / 3000K - 257lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K	1A5100400.27.20
Matt Black - 3000K	1A5100400.30.20




BUIO - 32°

Transparent filter
6,4W
24V DC
2700K - 297lm / 3000K - 297lm
CRI >90
Beam 32°
UGR <19
Driver not included



Matt Black - 2700K	1A5090400.27.20
Matt Black - 3000K	1A5090400.30.20



BUIO ELLIPTICAL


Transparent filter
6,4W
24V DC
2700K - 233lm / 3000K - 233lm
CRI >90
UGR <19
Driver not included




Matt Black - 2700K	1A5110400.27.20
Matt Black - 3000K	1A5110400.30.20

Compulsory accessories / Accessori obbligatori


Installation kits / Kit d'installazione




Wall bracket / Staffa da parete		Not included
Stainless Steel	Brushed INOX	1A4431000.00.00



Ceiling rose / Rosone		Not included
Matt Black	Brushed INOX	1A4441000.00.00




Earth spike / Picchetto		Not included
Stainless Steel	Brushed INOX	1A4451000.00.00



Tree strap / Cinghia per albero		Not included
Standard	Length 1 m	1A4590000.00.00

Drivers / Alimentatori




Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00

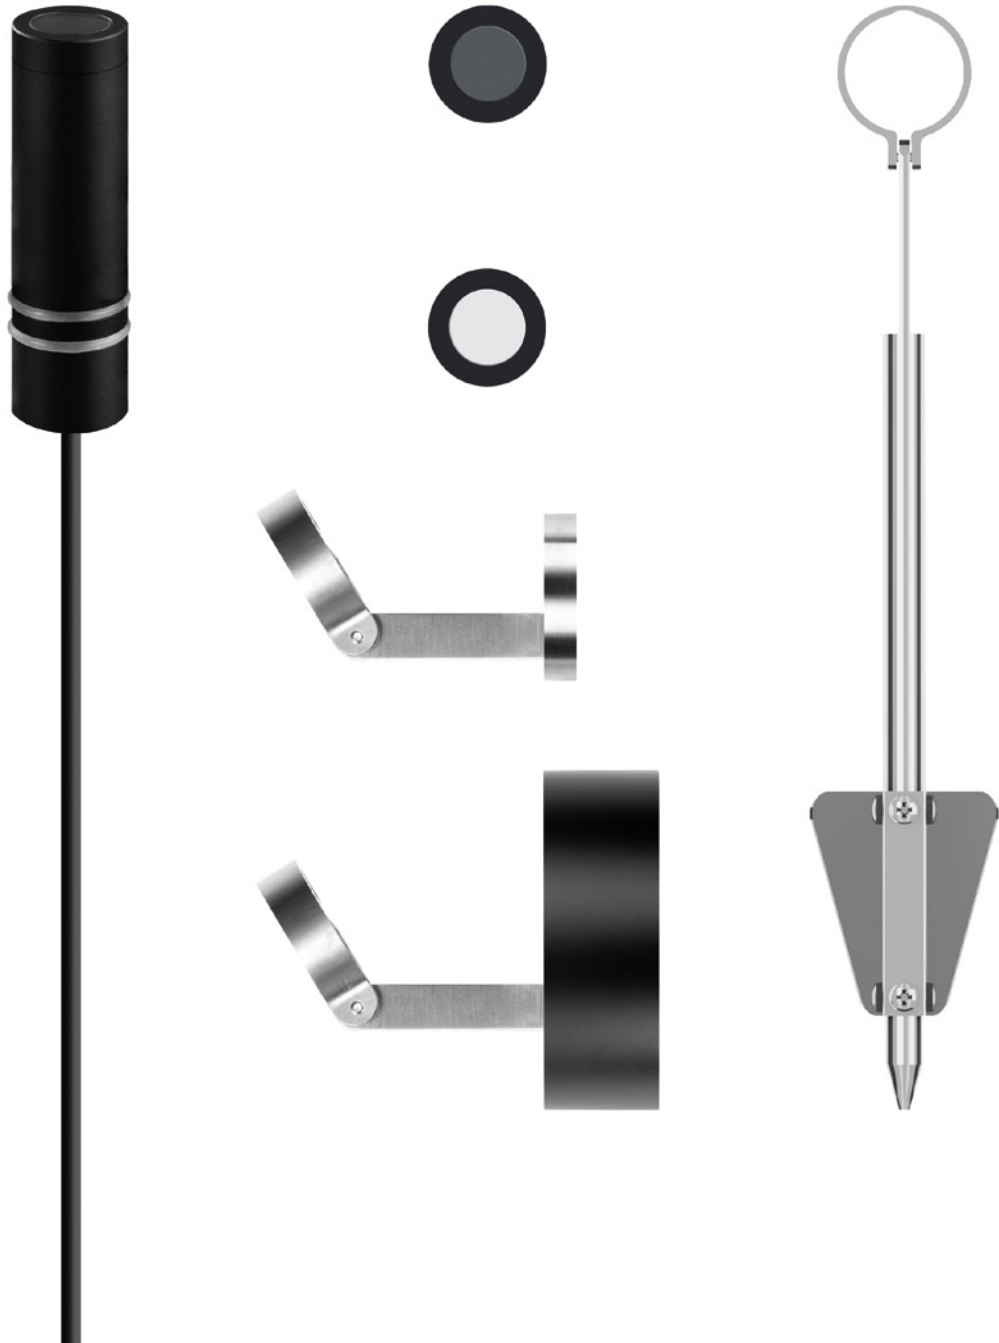



Floor luminaire with diffuse light for outdoor use.	A lantern. Soft and diffuse light. A slow-light project for outdoors.	The structure is in AISI 304 stainless steel. The diffuser is in matt white methacrylate.	It requires an E27 LED bulb, which is not included but is available as an accessory. The electric cable is matt black and 5 m long. An electric connector is included for outdoor use.
Apparecchio di illuminazione da terra, a luce diffusa, per esterni.	Una lanterna, luce morbida e diffusa. Un progetto di slow-light per l'outdoor.	La struttura è in AISI 304. Il diffusore è in metacrilato bianco opaco.	La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio. Il cavo elettrico è di colore nero opaco e 5 m di lunghezza. È incluso un connettore elettrico per esterni.

Finish	.03 Matt White
--------	----------------



LENTA
Max 18W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP65

Matt White - ON/OFF	1A3630300.00.00
---------------------	-----------------

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00

Bulbs / Lampadine



LED - E27 - A60	Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790

Other accessories / Altri accessori




IP65 Schuko adapter / Adattatore Schuko IP65	Not included
IP65	1A2950000.00.00





Floor luminaire with diffuse light for outdoor use.	A lantern. Soft and diffuse light. A slow-light project for outdoors.	The structure is in AISI 304 stainless steel and matt black anodised aluminium. The shade is in nylon and handstitched. SHOJI OUTDOOR is also available in the indoor version.	It requires an E27 LED bulb, which is not included but is available as an accessory. The electric cable is matt black and 5 m long. An electric connector is included for outdoor use.
Apparecchio di illuminazione da terra, a luce diffusa, per esterni.	Una lanterna, luce morbida e diffusa. Un progetto di slow-light per l'outdoor.	La struttura è in AISI 304 e alluminio anodizzato nero opaco. Il paralume è in nylon e cucito a mano. SHOJI OUTDOOR è disponibile anche in versione indoor.	La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio. Il cavo elettrico è di colore nero opaco e 5 m di lunghezza. È incluso un connettore elettrico per esterni.

Finish	.00 Standard
---------------	------------------------



SHOJI OUTDOOR

Max 18W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included

CE IP65

Standard - ON/OFF	1A3640000.00.00
-------------------	-----------------

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00

Bulbs / Lampadine



LED - E27 - A60	Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790

Other accessories / Altri accessori



IP65 Schuko adapter / Adattatore Schuko IP65	Not included
IP65	1A2950000.00.00





Recessed or wall luminaire with indirect light for indoor and outdoor use.

Apparecchio di illuminazione da incasso, da parete, a luce indiretta, per interni ed esterni.

Night has always been a source of inspiration. We walk, and we are not alone.
NUIT is a small travel companion that draws our night-time journeys.

La notte è sempre fonte di ispirazione. Camminiamo e non siamo soli.
NUIT è una piccola compagna di viaggio che disegna i nostri transiti notturni.


The base is in brushed natural, textured matt black or matt white painted AISI 430 stainless steel. The luminaire is in textured matt black painted aluminium.
The specific formwork is required for installation in masonry or concrete walls.
The specific frame is required for installation in plasterboard walls.

La base è in AISI 430 verniciata bianco opaco, nero opaco texturizzato o naturale spazzolato.
Il corpo illuminante è in alluminio verniciato nero opaco texturizzato.
Per l'installazione in pareti in laterizio o in calcestruzzo è obbligatorio l'utilizzo dell'apposita cassaforma.
Per l'installazione in pareti in cartongesso è obbligatorio l'utilizzo dell'apposito frame.

The light source is LED with integrated module.
The driver is not included but is available as an accessory.
An electric connector is included for outdoor use.

La sorgente luminosa è a LED e a modulo integrato.
Il driver non è incluso, ma è disponibile come accessorio.
È incluso un connettore elettrico per esterni.

Finish	.03	Matt White	.27	Gravity Black
	.38	Blasted Inox		
	Custom finish available on request. Finitura personalizzata su richiesta.			



NUIT

1W

24V DC

2700K - 33lm / 3000K - 34lm

CRI >90


Driver not included

CE IP65

Matt White - 2700K	1A1320300.27.20
Matt White - 3000K	1A1320300.30.20
Gravity Black - 2700K	1A1322700.27.20
Gravity Black - 3000K	1A1322700.30.20
Blasted Inox - 2700K	1A1323800.27.20
Blasted Inox - 3000K	1A1323800.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione




Concrete box / Cassaforma per cemento	Not included
Standard	1A4460000.00.00



Plasterboard frame 12,5 mm / Cornice per cartongesso 12,5 mm	Not included
Matt White	Cut-out 100x100 mm
	Minimum space for mounting 110 mm


Drivers / Alimentatori



Driver / Alimentatore	Not included
110-240V	24V/25W/IP67/ON/OFF
	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Adapter plasterboard 25 mm / Adattatore per cartongesso 25 mm	Not included
Standard	1A5030000.00.00




Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00





Floor luminaire with indirect light for outdoor use.	The mirror is always magical. BELLADINOTTE disappears during the day and is revealed at night.	The lamp consists of two matt black anodised aluminium luminaires. The mirror-finished stainless steel screen can be tilted up to 15°. The back of the screen is painted matt green. It is fixed in the ground by two AISI 304 stainless steel stakes.	The light sources are LED, with an integrated module. The electric cables are matt black and 5 m long. The drivers are not included but are available as an accessory. An electric connector is included for outdoor use.
Apparecchio di illuminazione da terra, a luce indiretta, per esterni.	Lo specchio è sempre magico. BELLADINOTTE scompare di giorno e si rivela durante la notte.	L'apparecchio è composto da due corpi illuminanti in alluminio anodizzato nero opaco. Lo schermo è in inox con finitura a specchio e inclinabile fino a 15°. Il retro dello schermo è verniciato verde opaco. Il fissaggio nel terreno avviene mediante due picchetti in AISI 304.	Le sorgenti luminose sono a LED e a modulo integrato. I cavi elettrici sono di colore nero opaco e 5 m di lunghezza. I driver non sono inclusi, ma sono disponibili come accessori. È incluso un connettore elettrico per esterni.




BELLADINOTTE

2x4,2W
24V DC
2700K - 2x262lm / 3000K - 2x282lm
CRI >90
Driver not included
CE IP67

Standard - 2700K	1A3560000.27.20
Standard - 3000K	1A3560000.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00





Wall luminaire with diffuse light for outdoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in matt white painted aluminium. The glass is sanded.	The light source is LED, with an integrated module. The driver is integrated, with a dimmer function. An electric connector is included for outdoor use.
Apparecchio di illuminazione da parete, a luce diffusa, per esterni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato bianco opaco. Il vetro è sabbato.	La sorgente luminosa è a LED e a modulo integrato. Il driver è integrato e dimmerabile. È incluso un connettore elettrico per esterni.

Finish	.03 Matt White
	 Custom finish available on request. Finitura personalizzata su richiesta.



JULIET

18W
220-240V - 50/60Hz
2700K - 827lm / 3000K - 865lm
CRI >80
Driver integrated
TRIAC/IGBT
C E IP65

Matt White - 2700K - TRIAC/IGBT	1A3670300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3670300.30.02

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00





Wall luminaire with direct light for outdoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The base is in textured matt black or matt white painted AISI 304 stainless steel. The spotlight is in textured matt black or matt white painted aluminium and is adjustable in all directions.	The light source is LED with integrated module. The electric cable is matt black and 10 m long. The driver is integrated, with a dimmer function. An electric connector is included for outdoor use.
Apparecchio di illuminazione da parete, a luce diretta, per esterni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	La base è in AISI 304 verniciata bianco opaco o nero opaco texturizzato. Il proiettore è in alluminio verniciato bianco opaco o nero opaco texturizzato ed è orientabile in tutte le direzioni.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 10 m di lunghezza. Il driver è integrato e dimmerabile. È incluso un connettore elettrico per esterni.

Finish	.03 Matt White	.04 Matt Black
	 Custom finish available on request. Finitura personalizzata su richiesta.	




SPOT OUTDOOR

8,4W
Max 700mA DC
2700K - 639lm / 3000K - 639lm
CRI >90
Driver not included
CE IP65

Matt White - 2700K	1A3650300.27.20
Matt White - 3000K	1A3650300.30.20
Matt Black - 2700K	1A3650400.27.20
Matt Black - 3000K	1A3650400.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00





Wall luminaire with direct light for outdoor use.	Light has found a home. A lamp designed to welcome, illuminating the entrance.	The body is in matt black painted AISI 304 stainless steel. The roof is in matt red painted AISI 304 stainless steel.	The light sources are LED, with an integrated module. The electric cable is matt black and 0,5 m long. The driver is not included but is available as an accessory. An electric connector is included for outdoor use.
Apparecchio di illuminazione da parete, a luce diretta, per esterni.	La luce ha trovato casa. Una lampada pensata per dare il benvenuto, per illuminare la soglia.	Il corpo è in AISI 304 verniciato nero opaco. Il tetto è in AISI 304 verniciato rosso opaco.	Le sorgenti luminose sono a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 0,5 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È incluso un connettore elettrico per esterni.

Finish	.00 Standard
	Custom finish available on request. Finitura personalizzata su richiesta.




IMU
5,5W
Max 350mA DC
3000K - 306lm
CRI >80
Driver not included
CE IP65

Standard - 3000K	1A3550000.30.20
------------------	-----------------

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(100-127V)	350mA/17W(15W)/IP68/ON/OFF	1Z0240880

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00





Suspension luminaire with direct light for outdoor use.	The idea is to bring light wherever you like. A simple design: a cable and a LED module.	The spotlight is in matt oxidised copper or textured matt black painted aluminium. NEURO OUTDOOR is also available in the indoor version.	The light source is LED with integrated module. The electric cable is matt black and 10 m long. The driver is not included but is available as an accessory. An electric connector is included for outdoor use.
Apparecchio di illuminazione a sospensione, a luce diretta, per esterni.	È l'idea di portare la luce dove si desidera. Un progetto semplice: un cavo e un modulo LED.	Il proiettore è in alluminio verniciato nero opaco texturizzato o rame ossidato opaco. NEURO OUTDOOR è disponibile anche in versione indoor.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 10 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È incluso un connettore elettrico per esterni.

Finish	.04 Matt Black	.32 Copper Oxide
	 Custom finish available on request. Finitura personalizzata su richiesta.	




NEURO OUTDOOR

4,2W
24V DC
2700K - 262lm / 3000K - 282lm
CRI >90
Driver not included
CE IP65

Matt Black - 2700K	1A4030400.27.20
Matt Black - 3000K	1A4030400.30.20
Copper Oxide - 2700K	1A4033200.27.20
Copper Oxide - 3000K	1A4033200.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00





Floor luminaire with indirect light for outdoor use.	A piece of architecture to be used in space.	The body is in concrete. The spotlight is in AISI 316L stainless steel. Q² is also available in the indoor version.	The light source is LED with integrated module. The electric cable is matt black and 2,5 m long. The driver is not included but is available as an accessory. An electric connector is available as an accessory for outdoor use.
Apparecchio di illuminazione da terra, a luce indiretta, per esterni.	Un pezzo di architettura da utilizzare nello spazio.	Il corpo è in calcestruzzo. Il proiettore è in AISI 316L. Q² è disponibile anche in versione indoor.	La sorgente luminosa è a LED e a modulo integrato. Il cavo elettrico è di colore nero opaco e 2,5 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È disponibile, come accessorio, un connettore elettrico per esterni.




Q²
20W
Max 500mA DC
3000K - 2058lm
CRI >90
Driver not included
CE  IP67

Standard - 3000K	1A1150000.30.20
------------------	-----------------

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(110-127V)	500mA/24W(15W)/IP68/ON/OFF	1Z0241170

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00





Wall or ceiling luminaire with direct light for outdoor use.	An element of light. Light is incorporated into the space, becoming an architectural element.	The body is in textured matt white painted aluminium. The fixing elements are in textured matt white painted AISI 316L stainless steel. The glass is transparent. CHILLOUT is adjustable in one direction.	It requires an E27 LED bulb, which is not included but is available as an accessory. The luminaire is not supplied with a power cable but can be connected internally. An electric connector is available as an accessory for outdoor use.
Apparecchio di illuminazione da parete o da soffitto, a luce diretta, per esterni.	Elemento di luce. La luce si integra con lo spazio diventando elemento architettonico.	Il corpo è in alluminio verniciato bianco opaco texturizzato. Gli elementi di fissaggio sono in AISI 316L verniciati bianco opaco texturizzato. Il vetro è trasparente. CHILLOUT è orientabile in una direzione.	La lampadina prevista è a LED, con attacco E27, e non è inclusa, ma disponibile come accessorio. L'apparecchio non è fornito con un cavo di alimentazione, ma è collegabile internamente. È disponibile, come accessorio, un connettore elettrico per esterni.

Finish	.03 Matt White
	 Custom finish available on request. Finitura personalizzata su richiesta.



CHILLOUT
Max 12W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP65

Matt White - ON/OFF	1A3660300.00.00
---------------------	-----------------

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68	Not included
1 Piece	1A1660000.00.00

Bulbs / Lampadine



LED - E27 - PAR30s	Not included
220-240V - 9,5W - 25° 3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	1Y0330730





Wall or ceiling luminaire with direct light for outdoor use.

We have always been thrilled by bare, abandoned lamps. On the walls of mountain huts, in the countryside of our plain. Unfinished works, lamps still to be decided, ephemeral thoughts that become poetry.

The socket is in matt black polycarbonate. The nail is in polished chrome galvanised aluminium.


The bulb required is LED with E27 (36V DC) socket, and is included. The electric cables are matt black or matt and 1,5 m long. The driver is not included but is available as an accessory. An electric connector is included for outdoor use.

Apparecchio di illuminazione da parete o da soffitto, a luce diretta, per esterni.

Ci hanno sempre emozionato le lampadine abbandonate, nude. Sui muri delle case di montagna, nelle campagne della nostra pianura. Lavori non ancora finiti, lampade ancora da decidere, pensieri effimeri che diventano poesia.

Il portalampada è in policarbonato nero opaco. Il chiodo è in alluminio galvanizzato cromo lucido.

La lampadina prevista è a LED, con attacco E27 (36V DC), ed è inclusa. I cavi elettrici sono di colore nero opaco e rosso opaco e 1,5 m di lunghezza. Il driver non è incluso, ma è disponibile come accessorio. È incluso un connettore elettrico per esterni.




HAZARD
0,6W - E27
36V DC
2200K - 50lm
CRI 80
Driver not included
Bulb included
CE  IP65

Standard - 2200K	1A4210000.22.20
------------------	-----------------

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	36V/36W/IP67/ON/OFF	1Z1120590




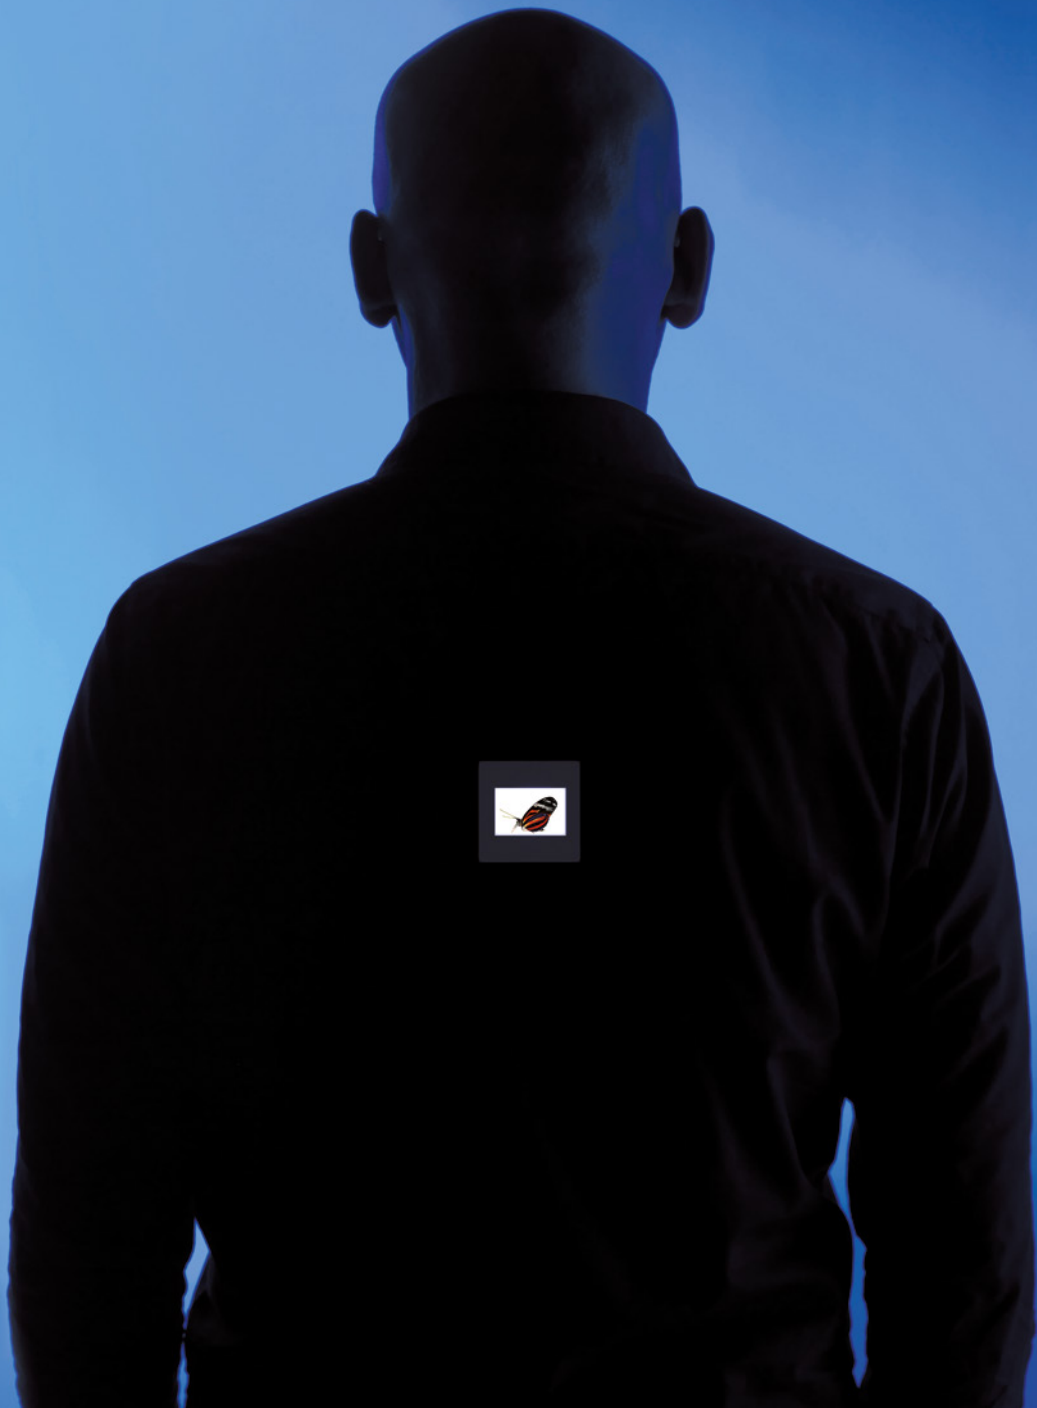OBJECTS / OGGETTI




Luminaire with diffuse light powered by a disposable battery.	Our smallest lamp, that you can wear. The idea comes from the poetic reuse of the classic 35 mm photo slide. A small suspended frame, essential and light, that reinvents itself with each picture it holds. With 35MM, light narrates, frames and thrills.	The visible part of the frame is in matt white polycarbonate; the black is polished black. The black suspension cord is elastic and is closed by a magnet. Not included, the image may be a slide or a frame printed on translucent material.	The light is intermittent, while power is provided by two disposable batteries, which are included. The switch is positioned on the upper part of the lamp.
Oggetto luminoso alimentato da una batteria non ricaricabile e a luce diffusa.	La più piccola delle nostre lampade e da indossare. L'idea nasce dal riuso poetico della classica diapositiva fotografica da 35 mm. Una piccola cornice sospesa, essenziale e leggera, capace di reinventarsi ogni volta grazie all'immagine che custodisce. Con 35MM la luce racconta, incornicia, emoziona.	La parte visibile del telaio è in polycarbonato bianco opaco mentre il retro è nero lucido. Il cordino nero di sospensione è elastico ed è chiuso da un magnete. L'immagine, non inclusa, può essere una pellicola da diapositiva oppure un frame stampato su materiale traslucido.	La luce è intermittente mentre l'alimentazione è fornita da due batterie non ricaricabili incluse. L'interruttore è posizionato sulla parte superiore della lampada.

Finish	.00	Standard
--------	-----	----------



35MM
0,3W
ON/OFF
Batteries 2xCR2032 included
CE  IP20

Standard - ON/OFF	1A2640000.00.00
-------------------	-----------------

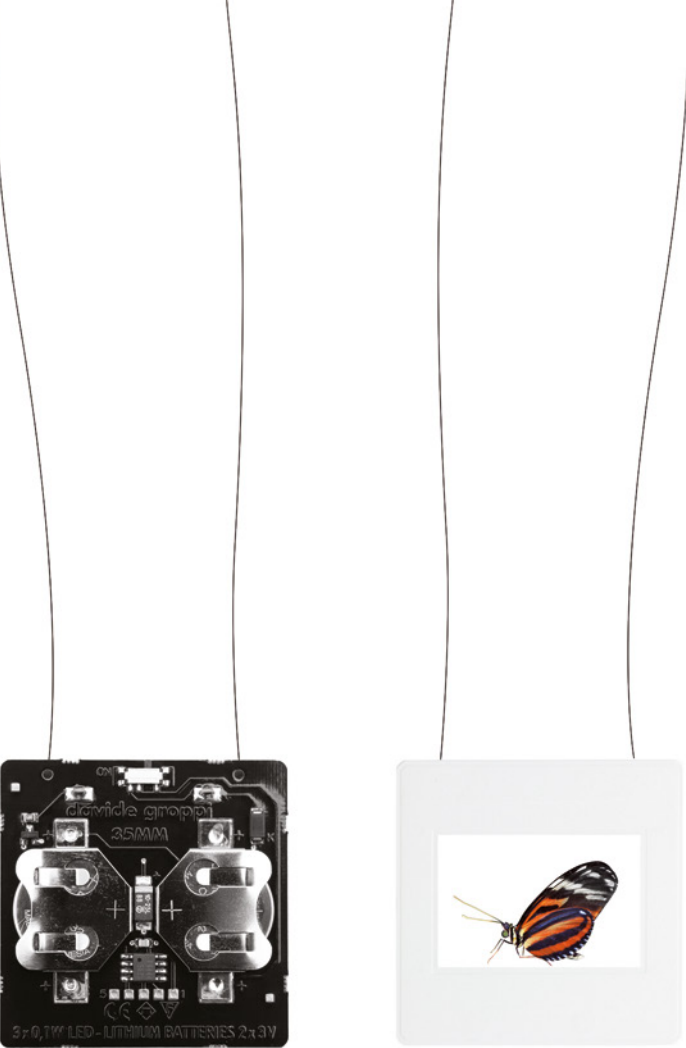




Wall luminaire with diffuse light for indoor use.	A luminous short film. Telling a story in light, a series of old 35 mm slides are lit from behind, pulsating and shown at random.	The body is in textured matt black painted steel. The visible part of the frame is in white polycarbonate. The photographs can be assembled and replaced as you like. Create your own personal message. Not included, the images may be slide films or frames printed on translucent material.	The light is intermittent. FILM has no switch. The power supply is plug-in and not included, but is available as an accessory. The luminaire can also be powered by a remote driver, available as an accessory.
---	--	--	--

Oggetto da parete, a luce diffusa, per interni.	Un cortometraggio luminoso. Per raccontare una storia con la luce retroilluminando, in modo pulsante e casuale, le vecchie diapositive da 35 mm.	Il corpo è in acciaio verniciato nero opaco texturizzato. La parte visibile del telaio è in polycarbonato bianco. Le fotografie possono essere montate e sostituite a piacimento. La scelta del messaggio da comunicare è del tutto personale. Le immagini, non incluse, possono essere delle pellicole da diapositiva oppure dei frame stampati su materiale traslucido.	La luce è intermittente. FILM non è dotata di interruttore. L'alimentatore è a spina e non è incluso, ma è disponibile come accessorio. L'apparecchio può essere alimentato anche mediante un driver remoto disponibile come accessorio.
---	---	---	---

Finish	.00	Standard
--------	-----	----------




FILM
3W
5V DC
Driver not included
ON/OFF
CE IP20


Standard - ON/OFF	1A3410000.00.00
-------------------	-----------------

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 15W - IP40	1Z1470180



Driver / Alimentatore		Not included
100-240V	5V/17,5W/IP20/ON/OFF	1Z1120180





Candlestick.

We think so far ahead that
sometimes we go backwards.
Before LEDs, fire.
A minimal, rational candlestick.

The vase is in transparent
borosilicate glass.
The support is in polished stainless
steel.
Two T-Light format candles are
included.


Oggetto portacandela.

Pensiamo talmente avanti che talvolta
torniamo indietro.
Prima dei LED, il fuoco.
Un portacandela minimo e razionale.

Il vaso è in vetro borosilicato
trasparente.
Il supporto è in acciaio inossidabile
lucido.
Sono incluse due candele in formato
T-Light.

Finish

.11 Polished Stainless Steel



ANTE LITTERAM
2 candles included

Polished Stainless Steel	1A5421100.00.00
--------------------------	-----------------

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Candles / Candele	Not included
10 Pieces	1A5430000.00.00



Flower holder.

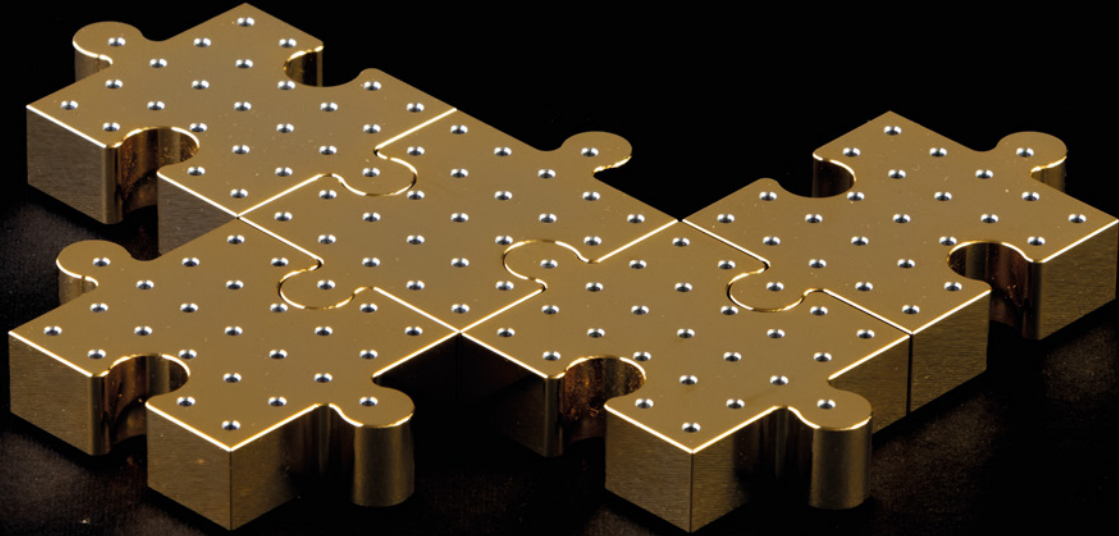
We like to combine the letters of our luminous alphabet to create anagrams, words, light stories. ANAGRAMMA is a holder designed for flowers, thoughts, love notes.

The matt black versions are in polyamide, while the polished gold version is in galvanised aluminium. The pieces of the puzzle can be composed as you like.


Oggetto porta fiori.

Ci piace combinare le lettere del nostro alfabeto luminoso per costruire anagrammi, parole, racconti di luce. ANAGRAMMA è un supporto per fiori, pensieri, messaggi d'amore.

Le versioni nero opaco sono in poliammide mentre la versione oro lucido è in alluminio galvanizzato. È possibile comporre a piacere le tessere del puzzle.




Finish	.04 Matt Black	.19 Polished Gold
--------	----------------	-------------------




ANAGRAMMA 10

Matt Black	1A5440400.00.00
------------	-----------------



ANAGRAMMA 15

Polished Gold	1A5471900.00.00
---------------	-----------------



ANAGRAMMA 20


Matt Black	1A5480400.00.00
------------	-----------------





Perfume holder.	Our perfume. The memory of our light. A container, a lid and two diffuser sticks.	The vase is in transparent borosilicate glass. The cap is in sanded black anodised aluminium. Two diffuser sticks are included.	The perfume is not included but is available as an accessory.
Oggetto contenitore di profumo.	Il nostro profumo. La memoria della nostra luce. Un contenitore, un tappo e due bacchette diffondenti.	Il vaso è in vetro borosilicato trasparente. Il tappo è in alluminio anodizzato nero sabbato. Sono incluse due bacchette diffondenti.	Il profumo non è incluso, ma disponibile come accessorio.

Finish	.04 Matt Black
--------	----------------



OMBRA

2 black wooden sticks included

Matt Black	1A5290400.00.00
------------	-----------------

Compulsory accessories / Accessori obbligatori


Other accessories / Altri accessori



Home fragrance / Profumatore per ambienti	Not included
200 ml	1A5410000.00.00

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Wooden sticks / Bastoncini neri	Not included
Matt Black 10 Pieces	1A5510400.00.00



BULBS / LAMPADINE

	Socket	Voltage	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	E27	220-240V	11,2W	360°	2700K	1521lm	>90	D	X	1Y0330790
	E27	220-240V	20W	200°	2700K	2452lm	>80	E	X	1Y2160020
	E27	220-240V	9,5W	25°	3000K	760lm	>80	F	X	1Y0330730
	GU10	220-240V	4,9W	120°	3000K	550lm	>80	E	-	1Y0330740
	GU10	220-240V	5,5W	25°	2700K	355lm	>97	G	X	1Y0330770
	GU10	220-240V	5,5W	25°	3000K	375lm	>97	G	X	1Y0330500
	GU10	230V	7,5W	10°	2700K	390lm	>95	G	X	1Y1580210
	GU10	230V	7,5W	10°	3000K	410lm	>95	G	X	1Y1580010
	R7s	220-240V	4W	330°	3000K	450lm	>80	E	-	1Y0000138

DG111 LED MODULES / MODULI LED DG111

	Current	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	350mA DC	11,7W	15°	2700K	990lm	>90	F	X	1A4700000.27.20
	350mA DC	11,7W	15°	3000K	1053lm	>90	F	X	1A4700000.30.20
	350mA DC	11,7W	22°	2700K	1322lm	>90	F	X	1A3890000.27.20
	350mA DC	11,7W	22°	3000K	1382lm	>90	F	X	1A3890000.30.20
	350mA DC	11,7W	36°	2700K	1276lm	>90	F	X	1A3900000.27.20
	350mA DC	11,7W	36°	3000K	1343lm	>90	F	X	1A3900000.30.20
	500mA DC	16,7W	15°	2700K	1349lm	>90	F	X	1A4700000.27.20
	500mA DC	16,7W	15°	3000K	1434lm	>90	F	X	1A4700000.30.20
	500mA DC	16,7W	22°	2700K	1859lm	>90	F	X	1A3890000.27.20
	500mA DC	16,7W	22°	3000K	1943lm	>90	F	X	1A3890000.30.20
	500mA DC	16,7W	36°	2700K	1795lm	>90	F	X	1A3900000.27.20
	500mA DC	16,7W	36°	3000K	1890lm	>90	F	X	1A3900000.30.20

DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	50W	220-240V	1400mA	TRIAC - PUSH	IP20	1Z0241370.1400
	55W(40W)	220-240V(110-120V)	1400mA	DALI - PUSH - 1-10V	IP20	1Z0240830.1400
	8W	220-240V	200mA	TRIAC/IGBT	IP20	1Z2270060.200
	10,8W(10,8W)	220-240V(110-127V)	200mA	DALI - PUSH - 1-10V	IP20	1Z0241270.200
	50W	100-240V	24V	ON/OFF	IP20	1Z1120490
	80W	100-240V	24V	ON/OFF	IP20	1Z1120440
	20W	220-240V	24V	TRIAC/IGBT	IP20	1Z0240850.24
	22W(12W)	220-240V(100-127V)	24V	ON/OFF	IP20	1Z0240410
	22W(13,5W)	220-240V(110-127V)	24V	DALI - PUSH - 1-10V	IP20	1Z0241270.24
	3W	100-277V	250mA	TRIAC/IGBT	IP20	1Z0400900
	12,5W	220-240V	250mA	TRIAC/IGBT	IP20	1Z0241280

DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	13,5W(13,5W)	220-240V(110-127V)	250mA	DALI - PUSH - 1-10V	IP20	1Z0241270.250
	14W	220-240V	350mA	TRIAC/IGBT	IP20	1Z2270060.350
	17W	220-240V	350mA	TRIAC/IGBT	IP20	1Z0240850.350
	18W(18W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0240530.350
	18,9W(13,5W)	220-240V(110-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0241270.350
	19W	220-240V	400mA	TRIAC/IGBT	IP20	1Z0240850.400
	20W	220-240V	450mA	TRIAC/IGBT	IP20	1Z0240850.450
	24,3W(13,5W)	220-240V(110-127V)	450mA	DALI - PUSH - 1-10V	IP20	1Z0241270.450
	60W	220-240V	48V	DALI	IP20	1Z0830820
	20W	220-240V	500mA	TRIAC/IGBT	IP20	1Z0240850.500
	25W(13,5W)	220-240V(110-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0241270.500

DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	25W(13,5W)	220-240V(110-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0241270.550
	20W	220-240V	550mA	TRIAC/IGBT	IP20	1Z0240850.550
	17,5W	100-240V	5V	ON/OFF	IP20	1Z1120180
	30W	220-240V	600mA	TRIAC/IGBT	IP20	1Z2270050.600
	25W(13,5W)	220-240V(110-127V)	600mA	DALI - PUSH - 1-10V	IP20	1Z0241270.600
	120W	100-240V	24V	1-10V	IP67	1Z1120240
	150W	100-240V	24V	1-10V	IP67	1Z1120500
	60W	100-240V	24V	1-10V	IP67	1Z1120260
	96W	100-240V	24V	1-10V	IP67	1Z1120540
	25W	110-240V	24V	ON/OFF	IP67	1Z1120620
	36W	110-240V	36V	ON/OFF	IP67	1Z1120590


DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	150W	100-240V	48V	1-10V	IP67	1Z1120250
	240W	100-240V	48V	1-10V	IP67	1Z1120390
	60W	100-240V	48V	ON/OFF	IP67	1Z1120640
	80W	100-240V	48V	1-10V	IP67	1Z1120400
	17W(15W)	220-240V(100-127V)	350mA	ON/OFF	IP68	1Z0240880
	24W(15W)	220-240V(110-127V)	500mA	ON/OFF	IP68	1Z0241170
	30W(15W)	220-240V(100-127V)	700mA	ON/OFF	IP68	1Z0241110



Driver with plug / Alimentatore con spina

	EU plug adapter	All power supplies with plugs include an adapter/plug that complies with the standard of the country of sale. Tutti gli alimentatori con spina includono l'adattatore/spina conforme allo standard del paese di vendita.
	UK plug adapter	
	AU plug adapter	

COMMON ACCESSORIES / ACCESSORI COMUNI

	Power	Input	Output	Dimming	Protection	Code
Controller Casambi - Radio signal 2.4 - 2.486 GHz						
		220-240V - 50Hz		DALI	IP20	1Z0400740
		220-240V - 50Hz		1-10 V	IP20	1Z0400660
	(75W) 150W	(110V) 240V - 50/60Hz		TRIAC	IP20	1Z0400670

COMMON ACCESSORIES / ACCESSORI COMUNI

	Size	Cut-out	Finish	Code
Plasterboard trapdoors / Botole in cartongesso				
	200x200 mm	205x205 mm	Standard	1A3780000.00.00
	400x400 mm	415x415 mm	Standard	1A3790000.00.00
Clamp / Bloccacavo				
	Ø 50x20 mm		Matt White	1X0110300.02.00
			Matt Black	1X0110400.02.00
Wall and ceiling rose / Rosone da parete e soffitto				
	Ø 80x28 mm		Matt White	1X0030300.01.00
			Matt Black	1X0030400.01.00
Wall adapter plate for mounting on brick masonry walls / Piastra di adattamento da parete per il montaggio su pareti in muratura				
	Ø 120x11 mm		Matt White	1X0050300.01.00
Driver connector IP68 / Connettore driver IP68				
			Standard	1A1660000.00.00

*For Class III suspension luminaire only. / Solo per le lampade a sospensione in Classe III.

General terms.

This document replaces any other previous one.
Davide Groppi s.r.l. reserves the right to change its products without notice. In this case, the descriptions printed here are not binding.
The sizes are expressed in millimeters.

Shipment.

Returned merchandise must be authorized in writing by Davide Groppi s.r.l.
Any claim must be made in writing to Davide Groppi s.r.l. within 7 days of the delivery date. If not, it will not be accepted.

Warranty.

All products are guaranteed for 24 months from the date of delivery.
The warranty is not valid for damage caused by third parties.
Any damage resulting from improper installation or changes to products cannot be considered the responsibility of Davide Groppi s.r.l.

Rights.

No part of this document may be reproduced or transmitted in any form or by any means: electronic, mechanical or otherwise,
without the written permission of Davide Groppi s.r.l.

Jurisdiction.

For any dispute, Piacenza, Italy, will be the court of jurisdiction.

Privacy.

Davide Groppi s.r.l. protects the confidentiality of personal data as provided to articles 12, 13 and 14 of the European Regulation n. 679/2016 (GDPR).

Condizioni generali.

Il presente documento annulla e sostituisce ogni edizione precedente.
Davide Groppi s.r.l. si riserva la facoltà di modificare i propri prodotti senza preavviso pertanto le descrizioni riportate in questo documento non sono vincolanti.
Le dimensioni sono espresse in millimetri.

Spedizioni.

Resi di materiale sono accettati previa autorizzazione scritta dell'azienda.
Eventuali reclami sono considerati solo se comunicati per iscritto entro 7 giorni dalla data di consegna della merce.

Garanzia.

I prodotti di Davide Groppi s.r.l. sono garantiti per 24 mesi dalla data di consegna.
La garanzia non ha valore per danni causati da terzi.
Eventuali danni derivanti da errata installazione o da modifiche apportate ai prodotti non possono essere considerati responsabilità di Davide Groppi s.r.l.

Diritti.

Nessuna parte di questo documento può essere riprodotta o trasmessa in qualsiasi forma o con qualsiasi mezzo elettronico,
meccanico o altro senza l'autorizzazione scritta di Davide Groppi s.r.l.

Foro Competente.

Per eventuali controversie è competente il Foro di Piacenza.

Privacy.

La Davide Groppi s.r.l. tutela la riservatezza dei dati personali come previsto degli art. 12, 13 e 14 del Regolamento Europeo n. 679/2016 (GDPR).

davidegroppi.com

Davide Groppi s.r.l.
Via Belizzi 20 / 22
29122 Piacenza - Italia
+39.0523.571590
info@davigroppi.com

Davide Groppi s.r.l. © 2026
Company with sole shareholder under the direction and coordination of Dexelance s.p.a.