KOS ROUND 7495

astro

SKU 1326004



PRODUCT SPECIFICATION

GENERAL

FINISH: Black CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Mild Steel **GROSS WEIGHT:** 0.417 (kg) Ø:80mm D:80mm **DIMENSIONS:** CLASS: CE (Class II) INSTALLATION ORIENTATION: Ceiling Mount IP RATING: IP65 **CUT OUT HOLE:** Not Applicable **BATHROOM ZONE:** Zone 1, 2, 3 **RECESS DEPTH:** Not Applicable VOLTAGE: Mains 230 (V) FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting

LAMP

LIGHT SOURCE: LED GU10 MACADAM ELIPSE: Not Applicable MAXIMUM WATTAGE: 6W Max UGR: Not Applicable MAXIMUM LAMP LENGTH: 58mm/2.28" **BEAM ANGLE:** Lamp Dependant LAMP INCLUDED? No TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** Lamp Dependent **ROTATION ADJUSTMENT ANGLE:** Not Applicable AVERAGE LIFESPAN: **COLOUR TEMP:** Lamp Dependent Lamp Dependent CRI: L70: Lamp Dependent Not Applicable

R9: Lamp Dependent

ELECTRICAL

SWITCHED: SUPPLY FREQUENCY: Nο Not Applicable DIMMABLE: Yes DRIVER/BALLAST VOLTAGE: Not Applicable DIMMING METHOD: Lamp Dependent DRIVER AVERAGE LIFESPAN: Not Applicable **DRIVER OUTPUT CURRENT:** Not Applicable EFFICACY: Lamp Dependent DRIVER OUTPUT VOLTAGE: DRIVER/BALLAST INCLUDED? Not Applicable Not Applicable

ADDITIONAL INFORMATION

ϵ


ONEROUS ENVIRONMENTS


All of our exterior products are covered by a 3 year guarantee; however this does not apply to any that are installed within 5 miles of the coast or in a high salt environment. For these environments, please filter products on the Astro website by "Salt Spray Tested". These products have passed a test for 1000 hours in a hot salt pray cabinet.



BOX QUANTITY X 12

on flammable materials

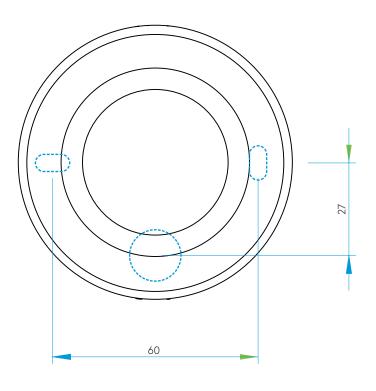

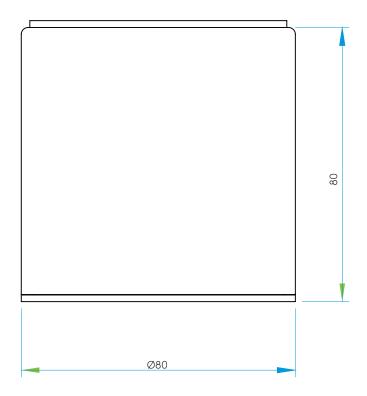

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com