

Class


2820

Design By Sebastian Herkner

VIBIA

The Class wall lamp brings matter and light together in a single body. The matt black of the lamp's stem contrasts with the fluted surface of the glass cylinder, bathing a wide area of outdoor space with its soft light.

Model Sheet

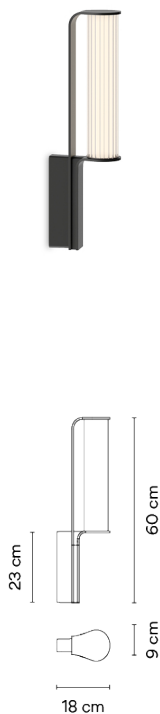

Finish

11 Black
NCS S 8500-N

LED

2700 K

Dimming

Casambi / DALI / Push

Installation type

Wall mount / Remote basic

LED

CRI>90 495 lm 141
2700 K

Driver

Constant Current 150 220~240 V V
50~60 Hz HZ

Application

Outdoor lamps

Packaging


1 Box
0.796 m x 0.292 m x 0.312 m
Gross weight 4.4
Net weight 2.9
Vol. 0.0725





Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

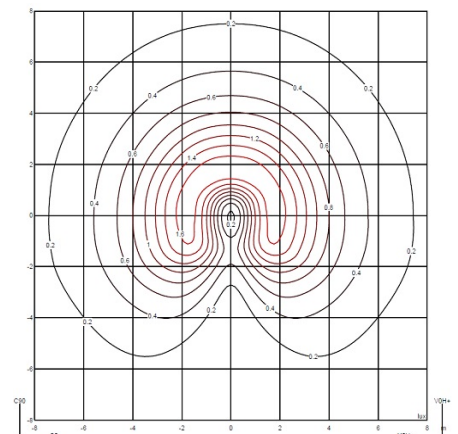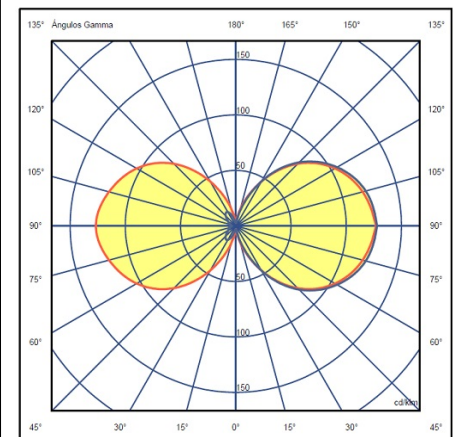

Efficiency
Coordinate System
Total Flux
Maximum Value

94.86 lm/W
CG
332.01 lm
129.48 cd/klm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Class



2825

Design By Sebastian Herkner

VIBIA

The Class wall lamp brings matter and light together in a single body. The matt black of the lamp's stem contrasts with the fluted surface of the glass cylinder, bathing a wide area of outdoor space with its soft light.

Model Sheet

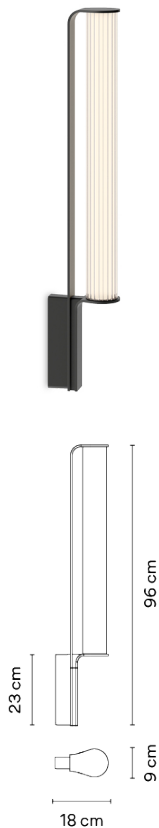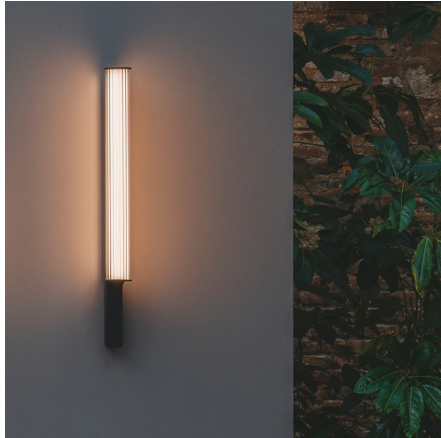

Finish

11 Black
NCS S 8500-N

LED

2700 K

Dimming

Casambi / DALI / Push

Installation type

Wall mount / Remote basic

LED

CRI>90 990 lm 141
2700 K

Driver

Constant Current 300 220~240 V V
50~60 Hz HZ

Dimmable LED IP65 50-60Hz PUSH

Application

Outdoor lamps

Packaging

1 Box
1.132 m x 0.3 m x 0.3 m
Gross weight 6.4
Net weight 4.4
Vol. 0.1018



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

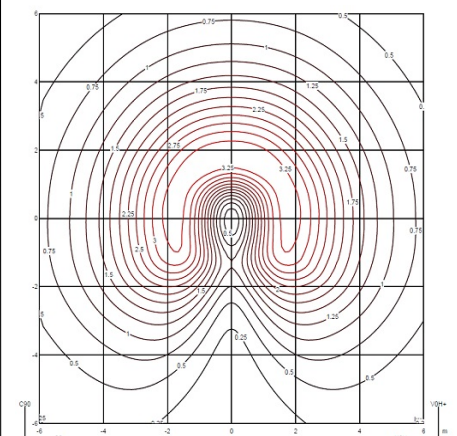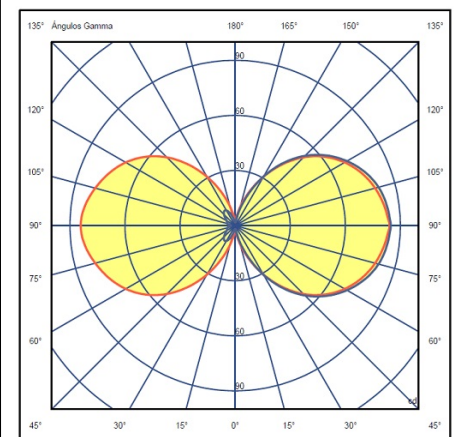

Efficiency 94.86 lm/W
Coordinate System CG
Total Flux 664.03 lm
Maximum Value 85.98 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com