

Circus solo

0176

Design By Antoni Arola

VIBIA

The versatile hanging Circus Solo accent spotlight allows for the definition of spaces and creation of different ambiances. The narrower angles of under 20° are perfect for generating high contrasts and distant projections.

Model Sheet



Finish

04 Black
NCS S 8500N

24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K

Control

PUSH DALI / CASAMBI

Electrical connection Built-in XS / Surface

Light source

1 x LED 7,2W 400mA



LED

CRI>90 680 lm 94,4
2700 K / 3000 K / 3500 K

Driver

Constant Current 400 mA 220~240
V 50~60 Hz

Dimmable LED IP20 50-60Hz

Application

Hanging


Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 1.39 kg
Net weight 1.09 kg
Vol. 0.0033 m3



Lighting effect

Accent Spotlight


Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

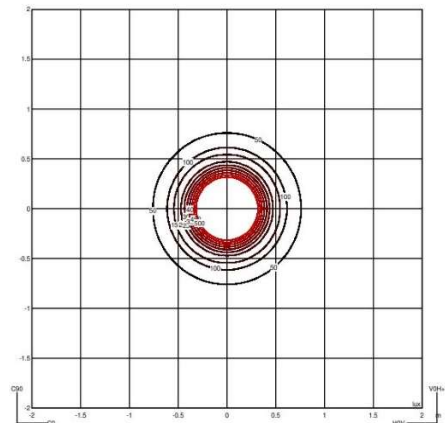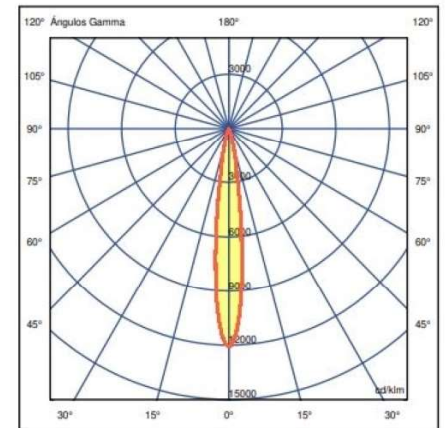

Efficiency 76.753 lm/W
Coordinate System CG
Total Flux 575.6 lm
Maximum Value 12087.14 cd/klm

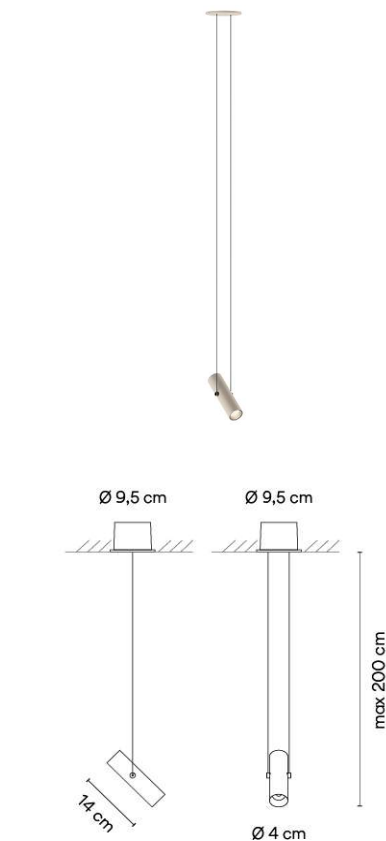

Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Circus solo


0177

Design By Antoni Arola

The hanging Circus Solo spotlight is inspired by a trapeze artist providing definition of spaces using medium contrasts and medium-distance projections. This model allows for comprehensive temperature regulation. By controlling the Leds individually the temperature can be precisely controlled from cold to warm white and red according to the desired effect.

VIBIA

Model Sheet

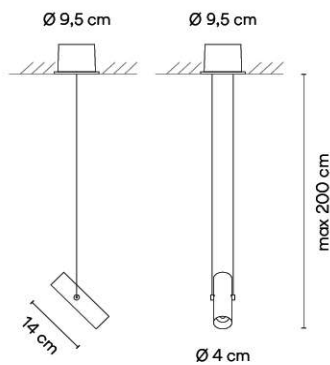

Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable
Red / Tunable White

Control

CASAMBI / PUSH DALI

Electrical connection Built-in XS / Surface

Light source 1 x LED 7,2W 400mA



LED

CRI>90 680 lm 94,4
2700 K / 3000 K / 3500 K / Tunable
Red / Tunable White

Driver

Constant Current 400 mA 220~240
V 50~60 Hz



Application

Hanging

Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 1.39 kg
Net weight 1.09 kg
Vol. 0.0033 m3



Lighting effect

Accent Spotlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

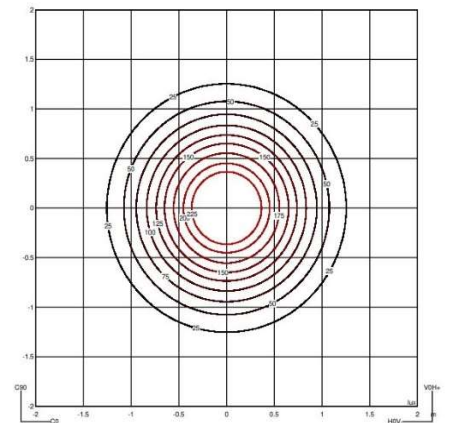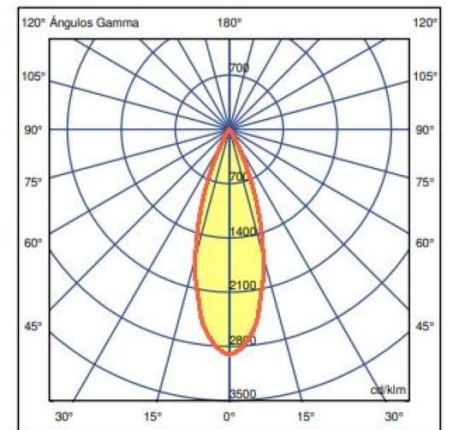

Efficiency
Coordinate System
Total Flux
Maximum Value

78.001 lm/W
CG
585.0 lm
2905.10 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Circus solo



0178

VIBIA

Design By Antoni Arola

The Circus Solo with its hanging spotlight over 40° generates moderate contrasts and nearer-distance projections. This model allows the temperature to be controlled precisely from cold to warm white and red according to the desired effect.

Model Sheet

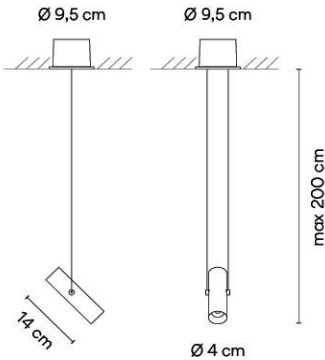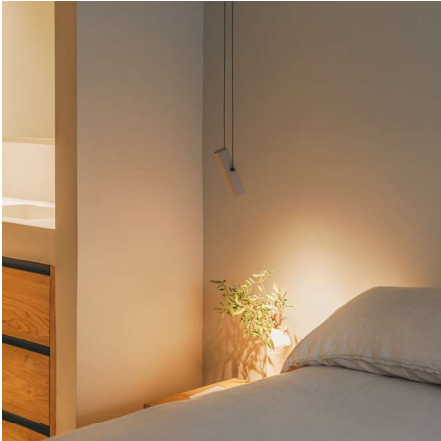

Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

CASAMBI / PUSH DALI

Electrical connection Surface / Built-in XS

Light source

1 x LED 7,2W 400mA



LED

CRI>90 680 lm 94,4
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 400 mA 220~240 V 50~60 Hz



Application

Hanging

Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 1.39 kg
Net weight 1.09 kg
Vol. 0.0033 m3



Lighting effect

Accent Spotlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

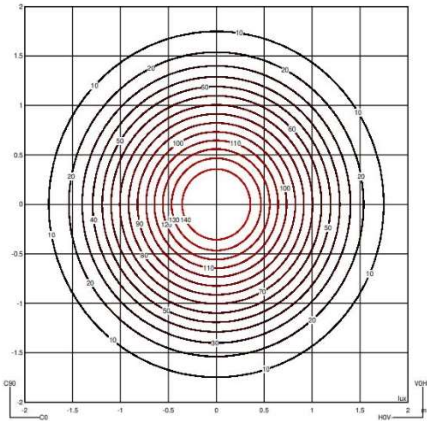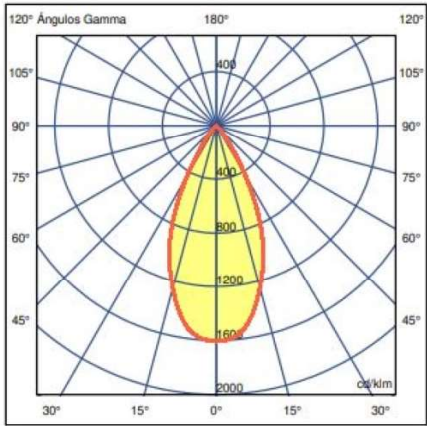

Efficiency

79.258 lm/W

Coordinate System

CG

Total Flux

594.4 lm

Maximum Value

1606.43 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Circus solo

0182

VIBIA

Design By Antoni Arola

The hanging Circus Solo provides a subtly directed diffuse light, perfect for close-up user lighting applications. This model is available in several temperatures from cold to warm white and red according to the effect to be created.

Model Sheet



Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

Finish	 04 Black NCS S 8500N
	 24 Beige M1 NCS S 2005-Y50R
LED	2700 K / 3000 K / 3500 K / Tunable Red / Tunable White
Control	CASAMBI / PUSH DALI

Electrical connection Built-in XS / Surface

Light source	1 x LED 12,8W 400mA 
LED	CRI>90 1763 lm 137.7 2700 K / 3000 K / 3500 K / Tunable Red / Tunable White
Driver	Constant Current 400 mA 220~240 V 50~60 Hz  Dimmable LED IP20 50-60Hz
Application	Hanging
Packaging	1 Box 0.51 m x 0.51 m x 0.165 m Gross weight 1.42 kg Net weight 3 kg Vol. 0.0429 m3



Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user



Photometric Data

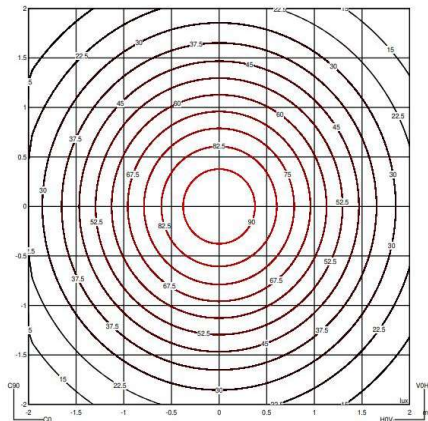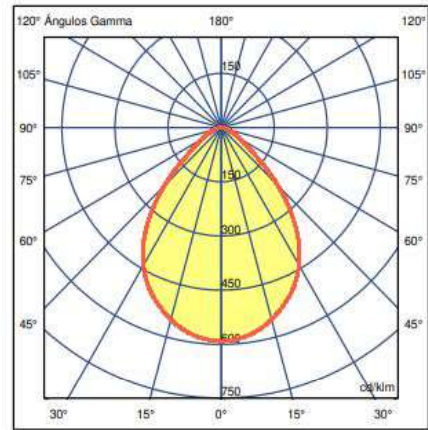

Efficiency	75.802 lm/W
Coordinate System	CG
Total Flux	1008.2 lm
Maximum Value	591.08 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Circus solo


0185

Design By Antoni Arola

VIBIA

The individual hanging Circus Solo provides a subtly directed diffuse lighting. This model is available in several temperatures from cold to warm white and red according to the effect to be created.

Model Sheet

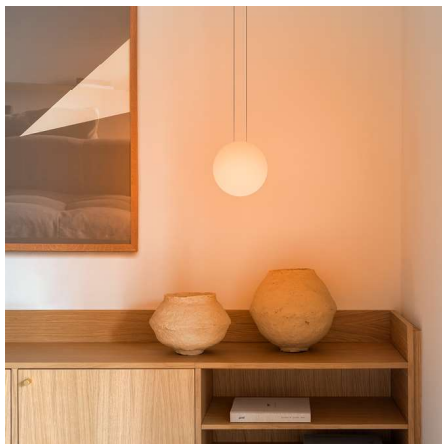

Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

Finish

24 Beige M1
NCS S 2005-Y50R

04 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K / Tunable
Red / Tunable White

Control

CASAMBI / PUSH DALI

Electrical connection Surface / Built-in XS

Light source

1 x LED 6,7W 400mA



LED

CRI>90 759 lm 113.4
2700 K / 3000 K / 3500 K / Tunable
Red / Tunable White

Driver

Constant Current 400 mA 220~240
V 50~60 Hz

 Dimmable LED IP20 50-60Hz

Application

Hanging


Packaging

1 Box
0.26 m x 0.26 m x 0.32 m
Gross weight 1.96 kg
Net weight 1.03 kg
Vol. 0.0216 m3



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

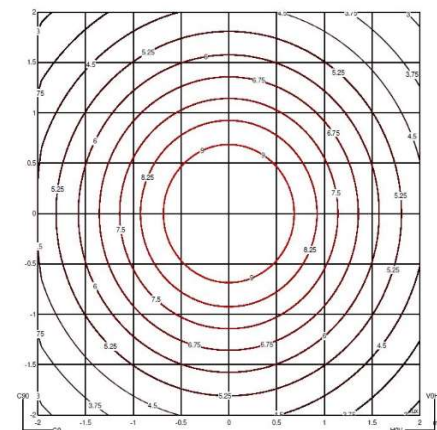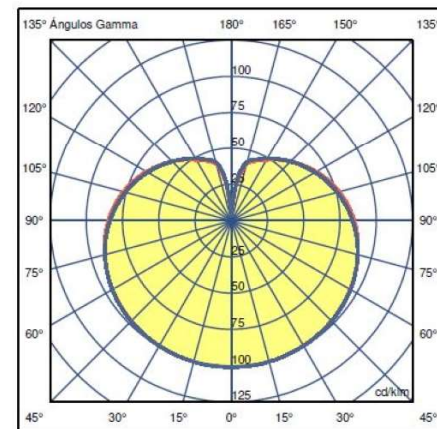

Efficiency 86.569 lm/W
Coordinate System CG
Total Flux 623.3 lm
Maximum Value 100.91 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Circus solo

0187

Design By Antoni Arola

The large dimension hanging model of Circus Solo provides a voluminous diffuse effect as well as the option of controlling the temperature from cold to warm white and red according to the desired effect.

VIBIA

Model Sheet



Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

Finish

24 Beige M1
NCS S 2005-Y50R

04 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K / Tunable
Red / Tunable White

Control

PUSH DALI / CASAMBI

Electrical connection Built-in XS / Surface

Light source

1 x LED 19,6W 600mA



LED

CRI>90 2588 lm 132
2700 K / 3000 K / 3500 K / Tunable
Red / Tunable White

Driver

Constant Current 600 mA 220~240
V 50~60 Hz



Application

Hanging


Packaging

1 Box
0.625 m x 0.605 m x 0.605 m
Gross weight 5.1 kg
Net weight 2.85 kg
Vol. 0.2287 m3



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

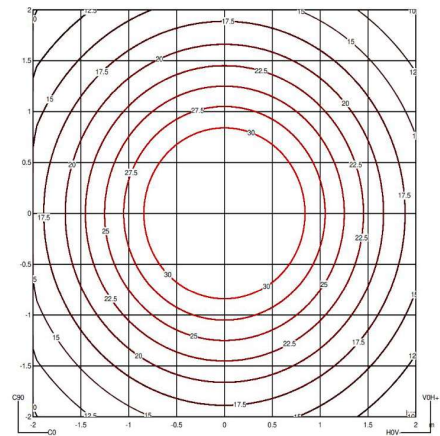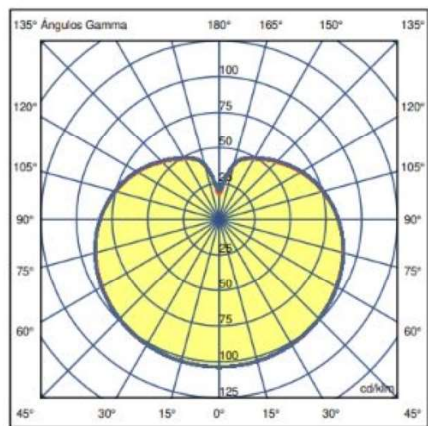

Efficiency 103.014 lm/W
Coordinate System CG
Total Flux 2142.7 lm
Maximum Value 103.44 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Circus solo



0193

VIBIA

Design By Antoni Arola

Hanging model with two spheres suspended from a slim track that provides a voluminous diffuse lighting. Perfect for creating warm ambiances.

Model Sheet

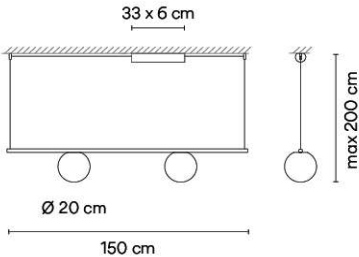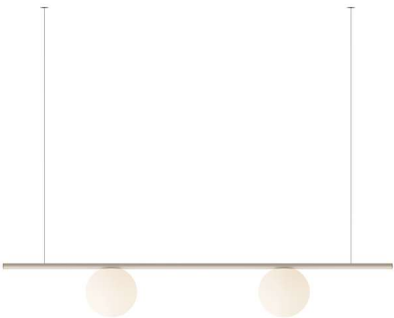

Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K

Control

CASAMBI / PUSH DALI

Electrical connection Built-in XS / Surface / Remote Micro

Light source

2 x LED 6,7W 400mA



LED

CRI>90 1518 lm 113.4
2700 K / 3000 K / 3500 K

Driver

Constant Current 400 mA 220~240
V 50~60 Hz

☐ F ☒ Dimmable LED IP20 50-60Hz

Application

Hanging


Packaging

1 Box
1.832 m x 0.3 m x 0.3 m
Gross weight 3.5 kg
Net weight 2.22 kg
Vol. 0.1648 m3

Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Circus solo


0196

VIBIA

Design By Antoni Arola

The hanging Circus Solo lamp with double shade provides a subtly directed diffuse lighting establishing a smooth hierarchy of light over the illuminated surface. This model is available in several temperatures from cold to warm white and red with the aim of creating distinctive ambiances.

Model Sheet

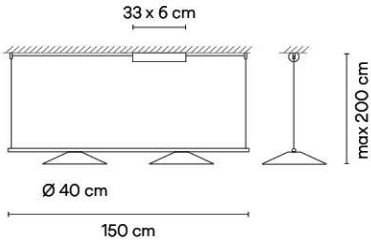

Optional : Extra cable length

Min. quantity, upcharge and extra lead time apply

Finish

24 Beige M1
NCS S 2005-Y50R

04 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K

Control

CASAMBI / PUSH DALI

Electrical connection Remote Micro / Surface / Built-in XS

Light source

2 x LED 11,1W 350mA



LED

CRI>90 3104 lm 139.8
2700 K / 3000 K / 3500 K

Driver

Constant Current 700 mA 220~240
V 50~60 Hz

☐ ☒ Dimmable LED IP20 50-60Hz

Application

Hanging

Packaging


1 Box

Gross weight 5.6 kg
Net weight 3.1 kg

Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

VIBIA

Assembly instructions / Instrucciones de montaje / Montageanleitung
Istruzioni di montaggio / Instructions de montage

Circus

Design by Antoni Arola






Step 1/2


Product Spec Sheet

Technical specifications / Especificaciones técnicas / Technische Daten
Specifiche tecniche / Caractéristiques techniques

A146

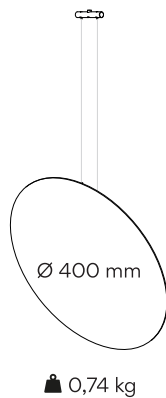

A147

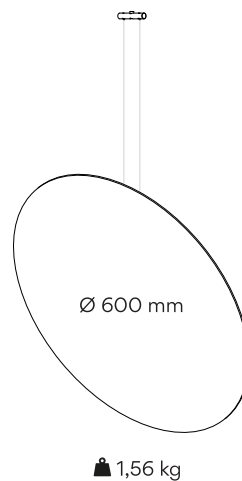

Caution

Before assembling and installing this product, carefully read the following:

- To install on the ceiling, always choose the most adequate fixing tools for the ceiling material.
- This lamp is for indoor use only, excluding bathrooms or any type of humid surface.
- We recommend reading the manual before installing the lamp. Keep this instructions for future reference.
- Do not disassemble, modify or try to repair this fitting. In order to get technical assistance contact VIBIA.com/support. Any change or modification to the light fitting can null the manufacturer's guarantee.



Precaución

Antes de proceder al montaje e instalación de esta luminaria, leer detenidamente las siguientes consideraciones:

- Para el montaje de la luminaria al techo elegir los elementos de fijación mas adecuados en función del soporte de instalación.
- Esta luminaria es apta únicamente para su uso en interior, excepto en baños o cualquier tipo de superficie húmeda.
- Recomendamos leer el manual antes de iniciar la instalación de la luminaria. Guardar estas instrucciones para futuras consultas.
- No desmonte, modifique, ni intente reparar la luminaria. Para recibir asistencia técnica, póngase en contacto con VIBIA.com/support. Cualquier cambio o modificación en la luminaria puede anular la garantía del fabricante.

Vorsicht

Bevor Sie mit der Montage dieser Leuchte beginnen, sollten Sie die folgenden Hinweise in aller Ruhe lesen und berücksichtigen:

- Wählen Sie passend zu der Vorrichtung für die Deckenmontage der Leuchte das dafür geeignetste Befestigungsmaterial.
- Diese Leuchte ist ausschliesslich für den Gebrauch im Innenbereich vorgesehen, ausser Bädern oder anderen Feuchträumen.
- Wir empfehlen vor Montagebeginn die Anleitung zu lesen. Bewahren Sie die Anleitung für etwaige zukünftige Fragen auf.
- Die Leuchte nicht auseinanderbauen, baulich ändern oder reparieren. Für technische Hilfe VIBIA.com/support kontaktieren. Eigenmächtig vorgenommene Änderungen an der Leuchte führen zu einem Verlust der Garantie.

Attention

Prima di procedere al montaggio e all'installazione di questo apparecchio, leggere attentamente le seguenti considerazioni:

- Per il montaggio della lampada al soffitto, usare gli strumenti di fissaggio più adeguati in base alla superficie di installazione.
- Questo apparecchio è adatto solo per uso interno, ad eccezione dei bagni o di qualsiasi tipo di superficie bagnata.
- Si consiglia di leggere il manuale prima di iniziare l'installazione dell'apparecchio. Salva queste istruzioni per future consultazioni.
- Non smontare, modificare né cercare di riparare la lampada. Per richiedere assistenza tecnica, mettersi in contatto con VIBIA.com/support. Qualsiasi cambiamento o modifica alla lampada può annullare la garanzia del fabbricante.

Attenzione


Avant de procéder à l'assemblage et à l'installation de ce luminaire, lisez attentivement les considérations suivantes:

- Pour fixer le luminaire au plafond, utilisez les éléments de fixation les mieux adaptés au support.
- Ce luminaire ne convient que pour une utilisation en intérieur, sauf dans les salles de bains ou tout type de surface humide.
- Nous vous recommandons de lire le manuel avant de commencer l'installation du luminaire. Sauvegardez ces instructions pour futures consultations.
- Ne démontez pas le luminaire, ne le modifiez pas et n'essayez pas de le réparer. Pour bénéficier d'une assistance technique, contactez VIBIA.com/support. Toute altération ou modification du luminaire peut annuler la garantie du fabricant.




Step 2/2
Assembly Process

1.

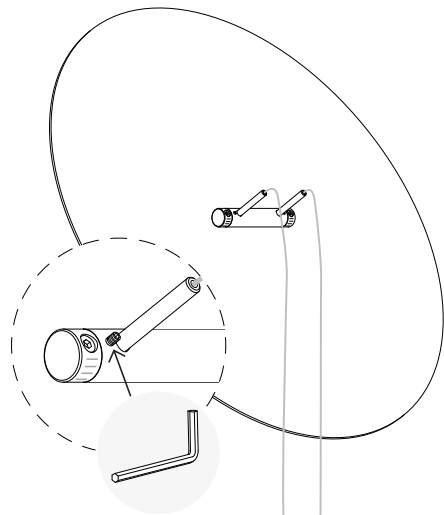


45°	60°	75°	90°


2.

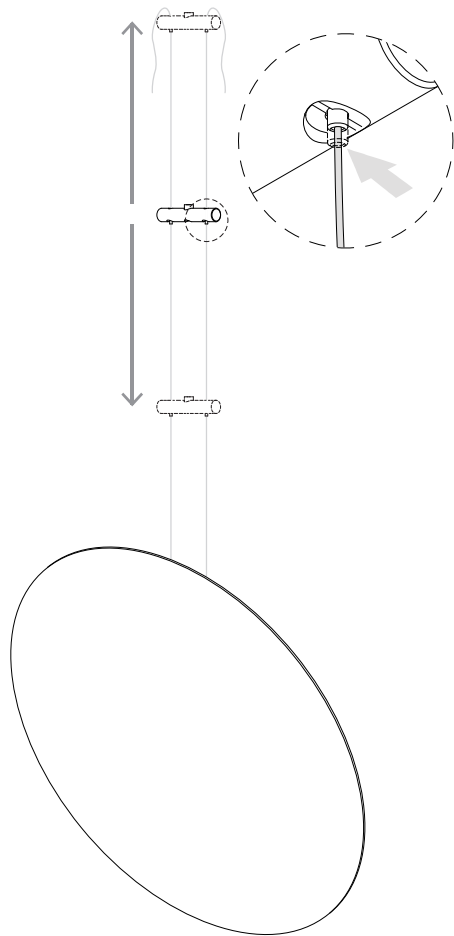


3.

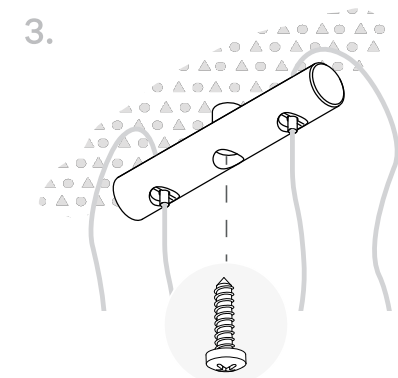


4.

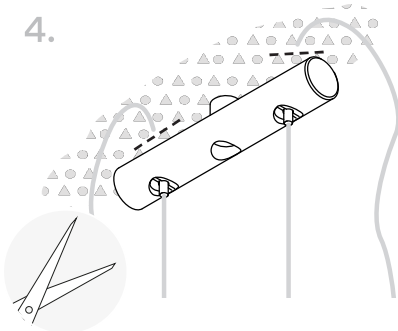

5.

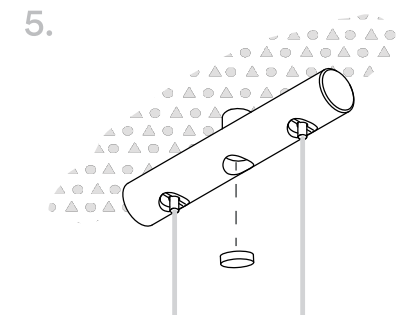

6.

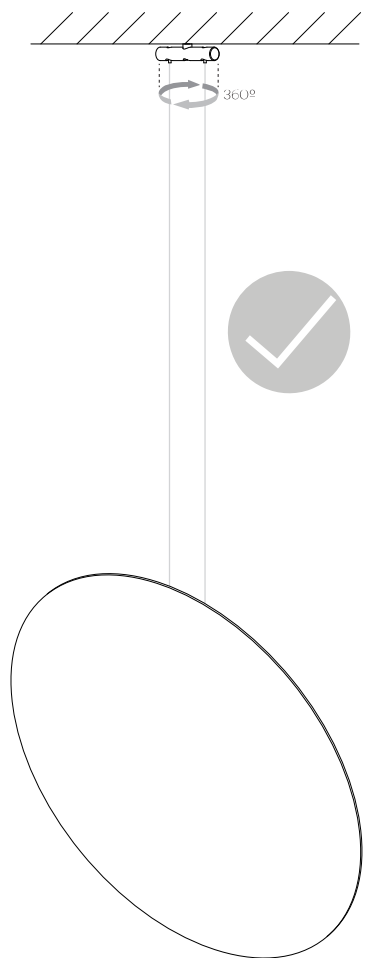

Maintenance

Use a slightly-wet cotton cloth for cleaning.

In case of malfunction or damage, please contact the retailer who sold the lamp.

Mantenimiento

Para limpiar la luminaria, usar un paño de algodón ligeramente humedecido en agua.

En caso de avería o incidente con la luminaria, contactar directamente con el establecimiento en que se adquirió.

Instandhaltung

Zur Reinigung der Leuchte nutzen Sie einen leicht angefeuchteten Baumwoll-Lappen.

Im Falle des Ausfalls oder einer Fehlfunktion der Leuchte setzen Sie sich direkt mit dem Unternehmen in Verbindung bei dem Sie die Leuchte bezogen haben.

Manutenzione

Per la pulizia della lampada, usare un panno di cotone leggermente inumidito con acqua.

In caso di guasto o incidente con la lampada, rivolgersi direttamente al rivenditore da cui è stata acquistata.

Entretien

Pour nettoyer le luminaire, utilisez un chiffon en coton légèrement humidifié d'eau.

En cas d'incident ou de défaillance du luminaire, contactez directement l'établissement où vous l'avez acheté.

Vibia Lighting, S.L.U.

Spain & Portugal T. +34 934 796 970

International T. +34 934 796 971

US & Canada T. +1 609 732 417 1700

vibialighting@vibialighting.com

www.vibia.com

VIBIA