


Coordinates Suspension 2

by Michael Anastassiades , 2020



Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne or argent moon finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.5-m cables. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose.



Mounting	Pendant
Environment	Indoor
Weight	2,7 Kg
Light sources available	1 x Strip Led 55W [i] 2700K 2960lm CRI95
Emergency	Without
Dimmer	Included 1-10/Push/Dali
Voltage	120-277V
Power	55W
Battery	No
Supply included	Yes
Materials	Aluminum, Platinic silicone extruded opal
Colors	F1862033 - Argent Moon F1862044 - Anodized Champagne




Coordinates Suspension 2 CLIII



by Michael Anastassiades , 2020



Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.5-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

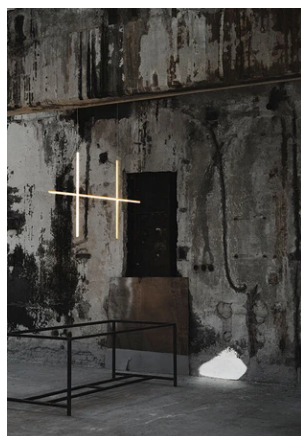

Mounting	Pendant
Environment	Indoor
Weight	1,7 Kg
Light sources available	1 x Strip Led 55W [i] 2700K 2960lm CRI95
Emergency	Without
Voltage	48V
Power	55W
Battery	No
Supply included	No
Materials	Extruded aluminum, Platinic silicone extruded opal
Colors	 F1844044 - Anodized Champagne



Coordinates Suspension 2 CLIII

by Michael Anastassiades , 2020



RF29208
HLG – 80H – 48A



RF26994
Dimmer Led