Duo petra

4871

Design By Ramos & Bassols

Dua Petra is a surface installation ceiling light where its interior natural slate appearance is combined with the technical elegance of its aluminium outer shell.

Model Sheet

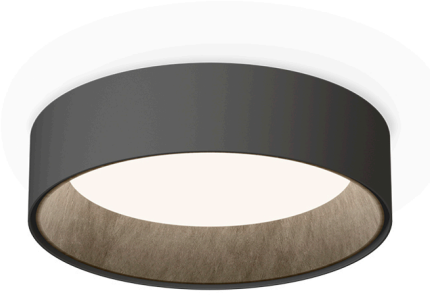



Min. quantity, upcharge and extra lead time apply

Finish	93 White RAL 9016
	58 Cream RAL 7044
	18 Graphite ADAPTA RF 9913
LED	2700 K / 3500 K / Tunable White
Control	PUSH 1-10V DALI / CASAMBI / DALI
Optional	Casambi / Casambi / Casambi
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 26W 500mA
LED	CRI>90 2206 lm 98 2700 K / 3500 K / Tunable White
Driver	Constant Current 500 mA 110~240 V 50~60 Hz
	IP20 Bi-volt 50-60Hz
Application	Ceiling
Packaging	1 Box 0.558 m x 0.558 m x 0.255 m Gross weigth 7 kg Net weigth 6 kg Vol. 0.0793 m3

Lighting effect

General

First layer of basic, general illumination



Photometric Data

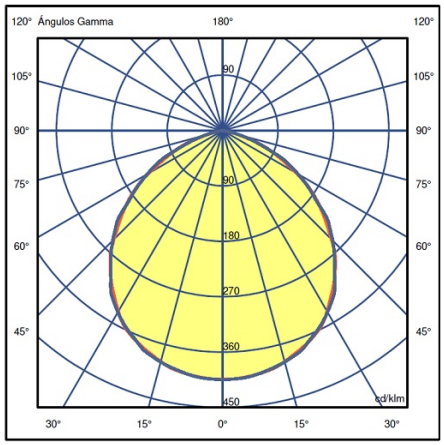

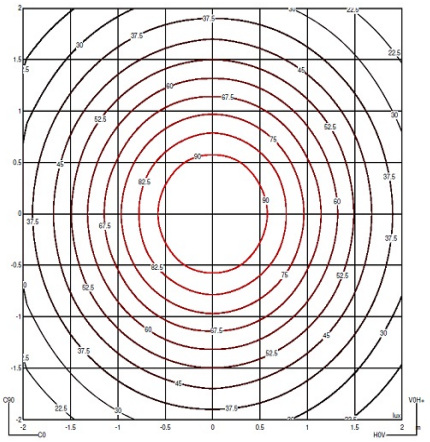

Efficiency	69.505 lm/W
Coordinate System	CG
Total Flux	1796.0 lm
Maximum Value	404.43 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo petra

4873

Design By Ramos & Bassols

Duo Petra is a surface installation ceiling light where the natural appearance of slate on the inside is combined with the technical elegance of the aluminium metal casing on the outside. Its large dimensions and diffuse lighting help illuminate large spaces with a single electrical connection.

Model Sheet

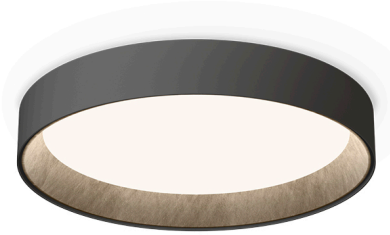



Min. quantity, upcharge and extra lead time apply

Finish	18 Graphite ADAPTA RF 9913
	58 Cream RAL 7044
	93 White RAL 9016
LED	2700 K / 3500 K / Tunable White
Control	CASAMBI / DALI / PUSH 1-10V DALI
Optional	Casambi / Casambi / Casambi
Electrical connection	Surface Canopy

	F
LED	CRI>90 3958.8 lm 98 2700 K / 3500 K / Tunable White
Driver	Constant Current 500 mA 110~240 V 50~60 Hz
	Dimmable LED IP20 Bi-volt 50-60Hz
Application	Ceiling
Packaging	1 Box 0.896 m x 0.882 m x 0.249 m Gross weigth 19 kg Net weigth 17 kg Vol. 0.1967 m3

Lighting effect

General

First layer of basic, general illumination



Photometric Data

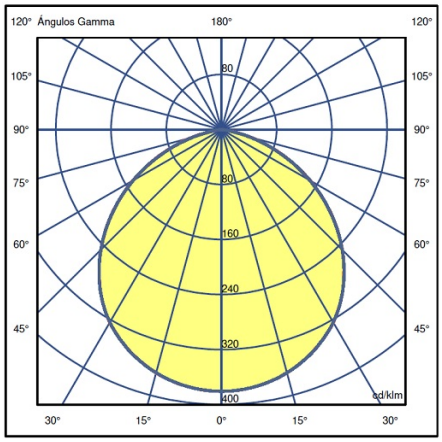

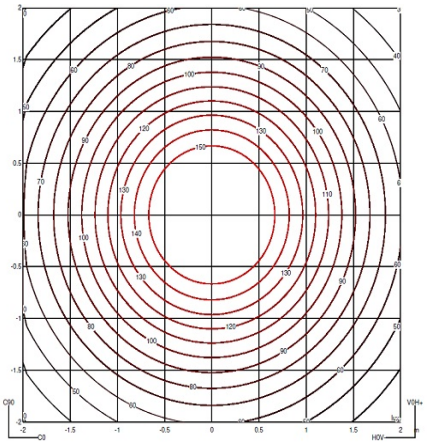

Efficiency	77.317 lm/W
Coordinate System	CG
Total Flux	3580.0 lm
Maximum Value	380.69 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo petra

4875

Design By Ramos & Bassols

Duo Petra is a surface installation ceiling lamp where the interior features the natural appearance of slate. The Duo Petrea ceiling light becomes a focal point without needing to be suspended.

Model Sheet



Min. quantity, upcharge and extra lead time apply

Finish	18 Graphite ADAPTA RF 9913 93 White RAL 9016 58 Cream RAL 7044
LED	2700 K / 3500 K / Tunable White
Control	PUSH 1-10V / CASAMBI / DALI
Optional	DALI or Casambi / DALI or Casambi / DALI or Casambi
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 12W 350mA G
LED	CRI>90 1100 lm 91.66 2700 K / 3500 K / Tunable White
Driver	Constant Current 350 mA 110~240 V 50~60 Hz F Dimmable IP20 Bi-volt 50-60Hz
Application	Ceiling
Packaging	1 Box 0.436 m x 0.436 m x 0.348 m Gross weigth 5 kg Net weigth 4 kg Vol. 0.0661 m3

Lighting effect

General

First layer of basic, general illumination



Photometric Data

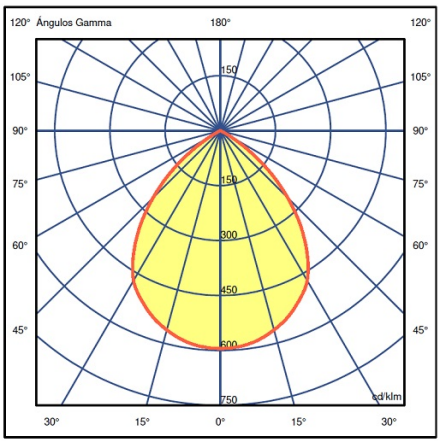

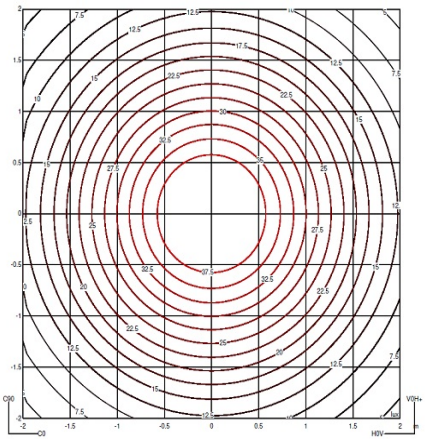

Efficiency	45.317 lm/W
Coordinate System	CG
Total Flux	571.0 lm
Maximum Value	594.57 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo petra

4877

Design By Ramos & Bassols

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The angled ceiling model is perfect for directing its diffuse lighting towards the required location.

Model Sheet



Min. quantity, upcharge and extra lead time apply

Finish	58 Cream RAL 7044
	93 White RAL 9016
	18 Graphite ADAPTA RF 9913
LED	2700 K / 3500 K / Tunable White
Control	DALI / CASAMBI / PUSH 1-10V
Optional	DALI or Casambi / DALI or Casambi / DALI or Casambi
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 12W 350mA
	G
LED	CRI>90 1100 lm 91.66 2700 K / 3500 K / Tunable White
Driver	Constant Current 350 mA 110~240 V 50~60 Hz
	F Dimmable LED IP20 Bi-volt 50-60Hz
Application	Ceiling
Packaging	1 Box 0.436 m x 0.436 m x 0.348 m Gross weigth 5 kg Net weigth 4 kg Vol. 0.0661 m3

Lighting effect

General

First layer of basic, general illumination



Photometric Data

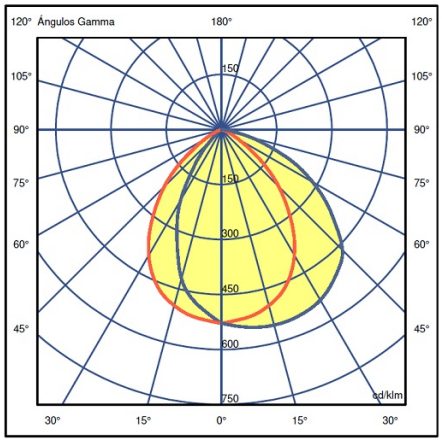

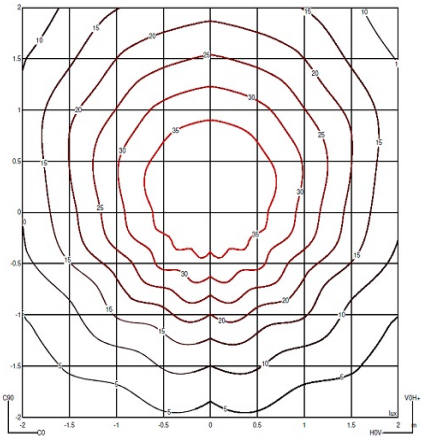

Efficiency	44.282 lm/W
Coordinate System	CG
Total Flux	612.4 lm
Maximum Value	552.42 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo petra

4879

Design By Ramos & Bassols

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The Duo Petrea ceiling light becomes a focal point without needing to be suspended.

Model Sheet

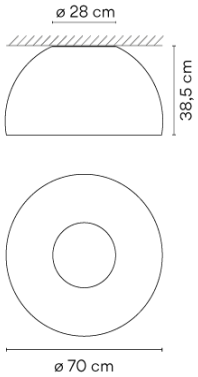

Min. quantity, upcharge and extra lead time apply

Finish	18 Graphite ADAPTA RF 9913
	58 Cream RAL 7044
	93 White RAL 9016
LED	2700 K / 3500 K / Tunable White
Control	PUSH 1-10V DALI / CASAMBI / DALI
Optional	Casambi / Casambi / Casambi
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 26W 500mA F
LED	CRI>90 2206 lm 98 2700 K / 3500 K / Tunable White
Driver	Constant Current 500 mA 110~240 V 50~60 Hz F Dimmable LED IP20 Bi-volt 50-60Hz
Application	Ceiling
Packaging	1 Box 0.593 m x 0.785 m x 0.785 m Gross weigth 16 kg Net weigth 14 kg Vol. 0.3654 m3

Lighting effect

General

First layer of basic, general illumination



Photometric Data

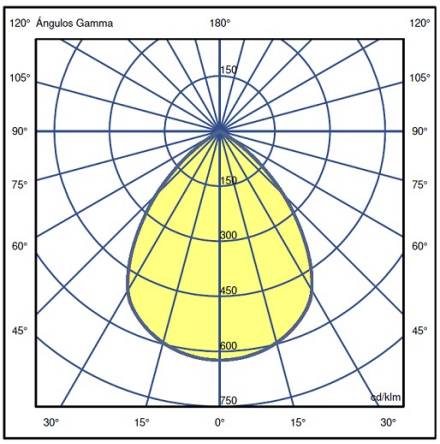

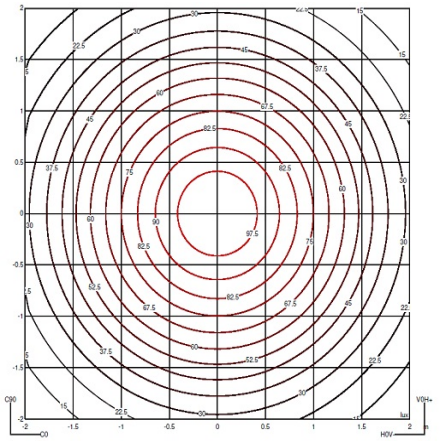

Efficiency	46.739 lm/W
Coordinate System	CG
Total Flux	1201.8 lm
Maximum Value	623.60 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo petra

4881

Design By Ramos & Bassols

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The angled ceiling model is perfect for directing its diffuse lighting towards the required location

Model Sheet

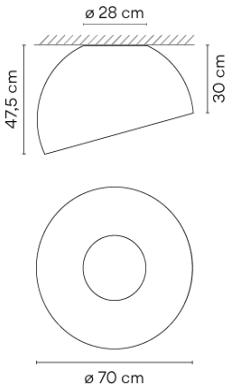

Min. quantity, upcharge and extra lead time apply

Finish	23 Warm White test ral
	58 Cream RAL 7044
	93 White RAL 9016
	18 Graphite ADAPTA RF 9913
	24 Beige M1 test ral
LED	2700 K / 3500 K / Tunable White
Control	CASAMBI / PUSH 1-10V DALI / DALI
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 26W 500mA F
LED	CRI>90 2068 lm 109 2700 K / 3500 K / Tunable White
Driver	Constant Current 500 mA 110~240 V 50~60 Hz F Dimmable LED IP20 Bi-volt 50-60Hz
Application	Ceiling
Packaging	1 Box 0.593 m x 0.785 m x 0.785 m Gross weigth 16 kg Net weigth 14 kg Vol. 0.3654 m3

Lighting effect

General

First layer of basic, general illumination



Photometric Data

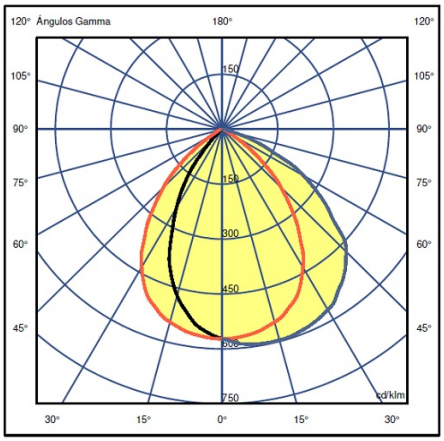

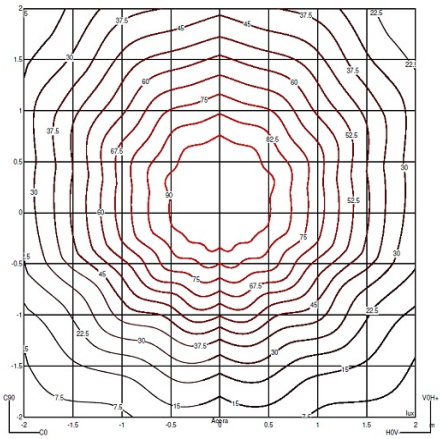

Efficiency	47.803 lm/W
Coordinate System	CG
Total Flux	1251 lm
Maximum Value	596.17 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com