

Duo


4870

Design By Ramos & Bassols

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

VIBIA

Model Sheet



Finish

- 93 White
RAL 9016
- 58 Cream
RAL 7044
- 18 Graphite
ADAPTA RF 9913

LED

2700 K / 3500 K / Tunable White

Control

Casambi / Push; 1-10V; DALI-2

Optional

Casambi / Casambi

Electrical connection

Surface Canopy

Light source

1 x LED PLATE 26W 500mA



LED

CRI>90 2206 lm 98
2700 K / 3500 K / Tunable White

Driver

Constant Current 500 mA 110-240 V
50-60 Hz

Dimmable IP20 Bi-volt 50-60Hz

Application

Ceiling


Packaging

1 Box
0.558 m x 0.558 m x 0.255 m
Gross weight 7 kg
Net weight 6 kg
Vol. 0.0793 m³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

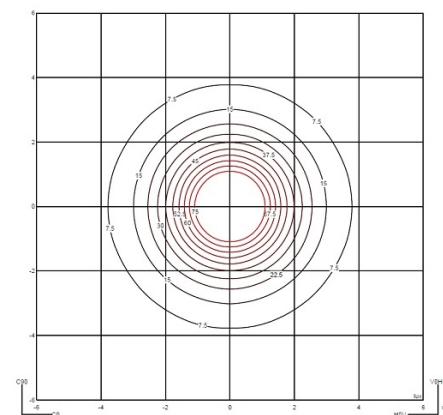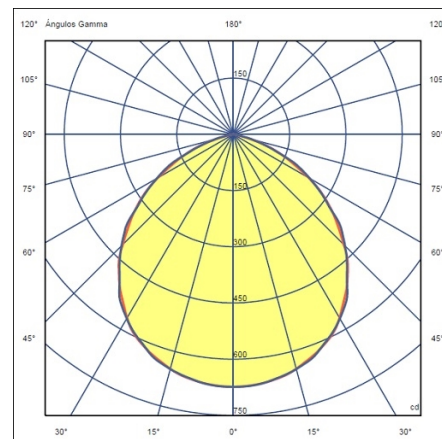

Efficiency 64.48 lm/W
Coordinate System CG
Total Flux 1666.07 lm
Maximum Value 673.81 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo



4872

Design By Ramos & Bassols

VIBIA

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

Model Sheet



Finish

- 58 Cream
RAL 7044
- 93 White
RAL 9016
- 18 Graphite
ADAPTA RF 9913

LED

2700 K / 3500 K / Tunable White

Control

Push; 1-10V; DALI-2 / Casambi

Optional

Casambi / Casambi

Electrical connection

Surface Canopy

Light source

1 x LED PLATE 46W 500mA



LED

CRI>90 3958.8 lm 98
2700 K / 3500 K / Tunable White

Driver

Constant Current 500 mA 110-240 V
50-60 Hz



Dimmable LED IP20 Bi-volt 50-60Hz

Application

Ceiling


Packaging

1 Box
0.896 m x 0.882 m x 0.249 m
Gross weight 24.1 kg
Net weight 17 kg
Vol. 0.1967 m³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

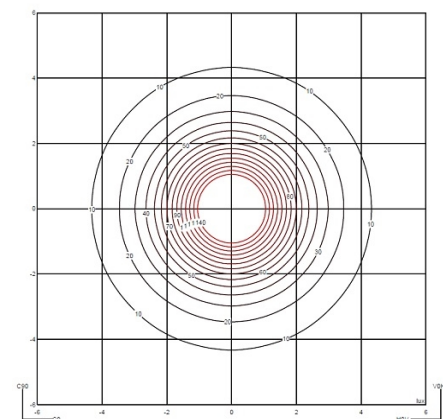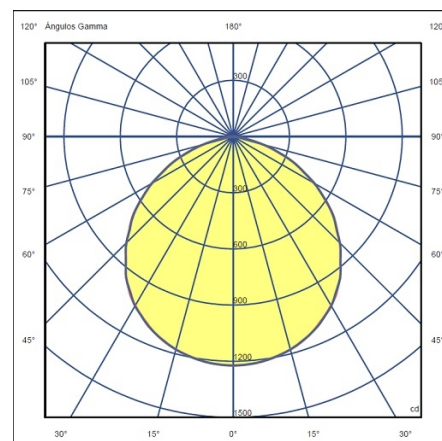

Efficiency 72.08 lm/W
Coordinate System CG
Total Flux 3299.98 lm
Maximum Value 1222.08 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo


4874

Design By Ramos & Bassols

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

VIBIA

Model Sheet



Finish

- 93 White
RAL 9016
- 18 Graphite
ADAPTA RF 9913
- 58 Cream
RAL 7044

LED

2700 K / 3500 K / Tunable White

Control

Push; 1-10V / DALI-2 / Casambi

Optional

DALI or Casambi / DALI or Casambi / DALI or Casambi

Electrical connection

Surface Canopy

Light source

1 x LED PLATE 12W 350mA



LED

CRI>90 1100 lm 91.66
2700 K / 3500 K / Tunable White

Driver

Constant Current 350 mA 110~240 V
50~60 Hz



Dimmable IP20 Bi-volt 50-60Hz

Application

Ceiling


Packaging

1 Box
0.436 m x 0.436 m x 0.348 m
Gross weight 6 kg
Net weight 4 kg
Vol. 0.0661 m³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

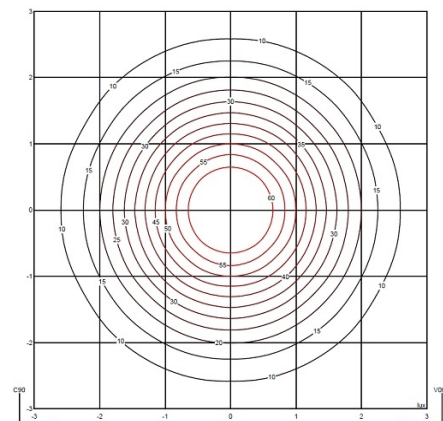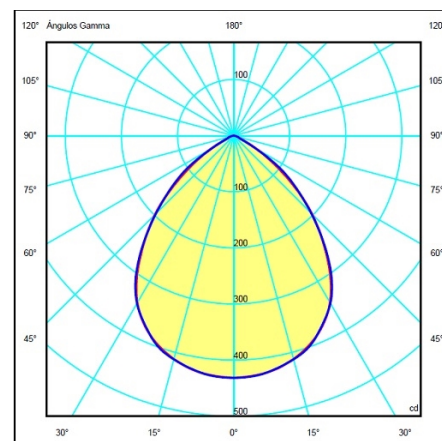

Duo


4876

Design By Ramos & Bassols

VIBIA

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

Model Sheet



Finish

- 93 White
RAL 9016
- 58 Cream
RAL 7044
- 18 Graphite
ADAPTA RF 9913

LED

2700 K / 3500 K / Tunable White

Control

Push; 1-10V / DALI-2 / Casambi

Optional

DALI or Casambi / DALI or Casambi / DALI or Casambi

Electrical connection

Surface Canopy

Light source

1 x LED PLATE 12W 350mA



LED

CRI>90 1100 lm 91.66
2700 K / 3500 K / Tunable White

Driver

Constant Current 350 mA 110~240 V
50~60 Hz



Dimmable LED IP20 Bi-volt 50-60Hz

Application

Ceiling


Packaging

1 Box
0.436 m x 0.436 m x 0.348 m
Gross weight 6 kg
Net weight 4 kg
Vol. 0.0661 m³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

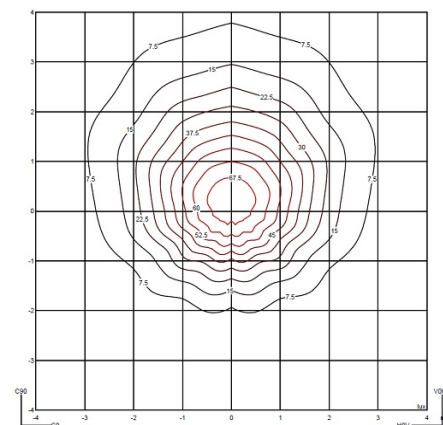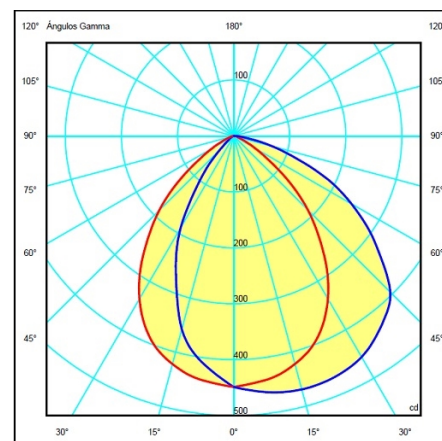

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Duo


4878

Design By Ramos & Bassols

VIBIA

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

Model Sheet

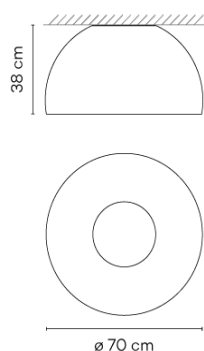

Finish

- 93 White
RAL 9016
- 18 Graphite
ADAPTA RF 9913
- 58 Cream
RAL 7044

LED

2700 K / 3500 K / Tunable White

Control

DALI-2 / Push; 1-10V; DALI-2 / Casambi

Optional

Casambi / Casambi / Casambi

Electrical connection

Surface Canopy

Light source

1 x LED PLATE 26W 500mA



LED

CRI>90 2206 lm 98
2700 K / 3500 K / Tunable White

Driver

Constant Current 500 mA 110~240 V
50~60 Hz



Dimmable LED IP20 Bi-volt 50-60Hz

Application

Ceiling


Packaging

1 Box
0.593 m x 0.785 m x 0.785 m
Gross weight 20.3 kg
Net weight 14 kg
Vol. 0.3654 m³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

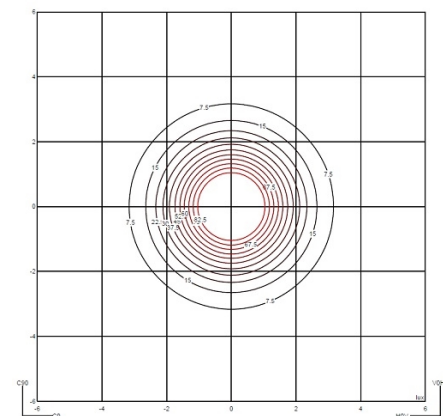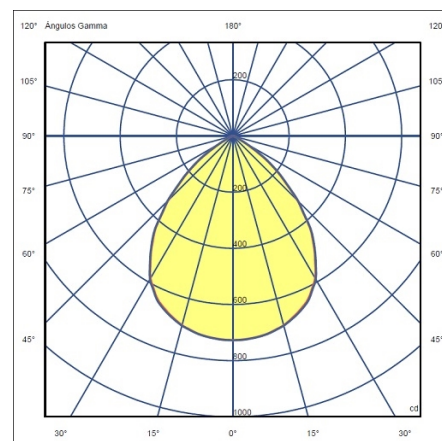

Efficiency
Coordinate System
Total Flux
Maximum Value

49.81 lm/W
CG
1284.41 lm
727.04 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Duo



4880

Design By Ramos & Bassols

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

VIBIA

Model Sheet



Min. quantity, upcharge and extra lead time apply

Finish

- 93 White
RAL 9016
- 58 Cream
RAL 7044
- 18 Graphite
ADAPTA RF 9913

LED

2700 K / 3500 K / Tunable White

Control

Casambi / Push; 1-10V; DALI-2

Optional

Casambi / Casambi

Electrical connection

Surface Canopy

Light source

1 x LED PLATE 26W 500mA



LED

CRI>90 2068 lm 109
2700 K / 3500 K / Tunable White

Driver

Constant Current 500 mA 110~240 V
50~60 Hz



Dimmable LED IP20 Bi-volt 50-60Hz

Application

Ceiling


Packaging

1 Box
0.593 m x 0.785 m x 0.785 m
Gross weight 20.6 kg
Net weight 14 kg
Vol. 0.3654 m³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

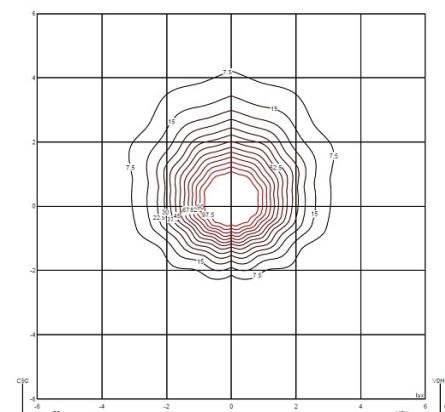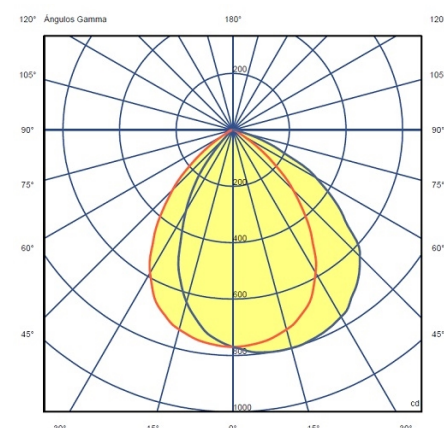

Efficiency 51.35 lm/W
Coordinate System CG
Total Flux 1343.81 lm
Maximum Value 801.14 cd

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

customer.service@vibia.com
vibia.com