


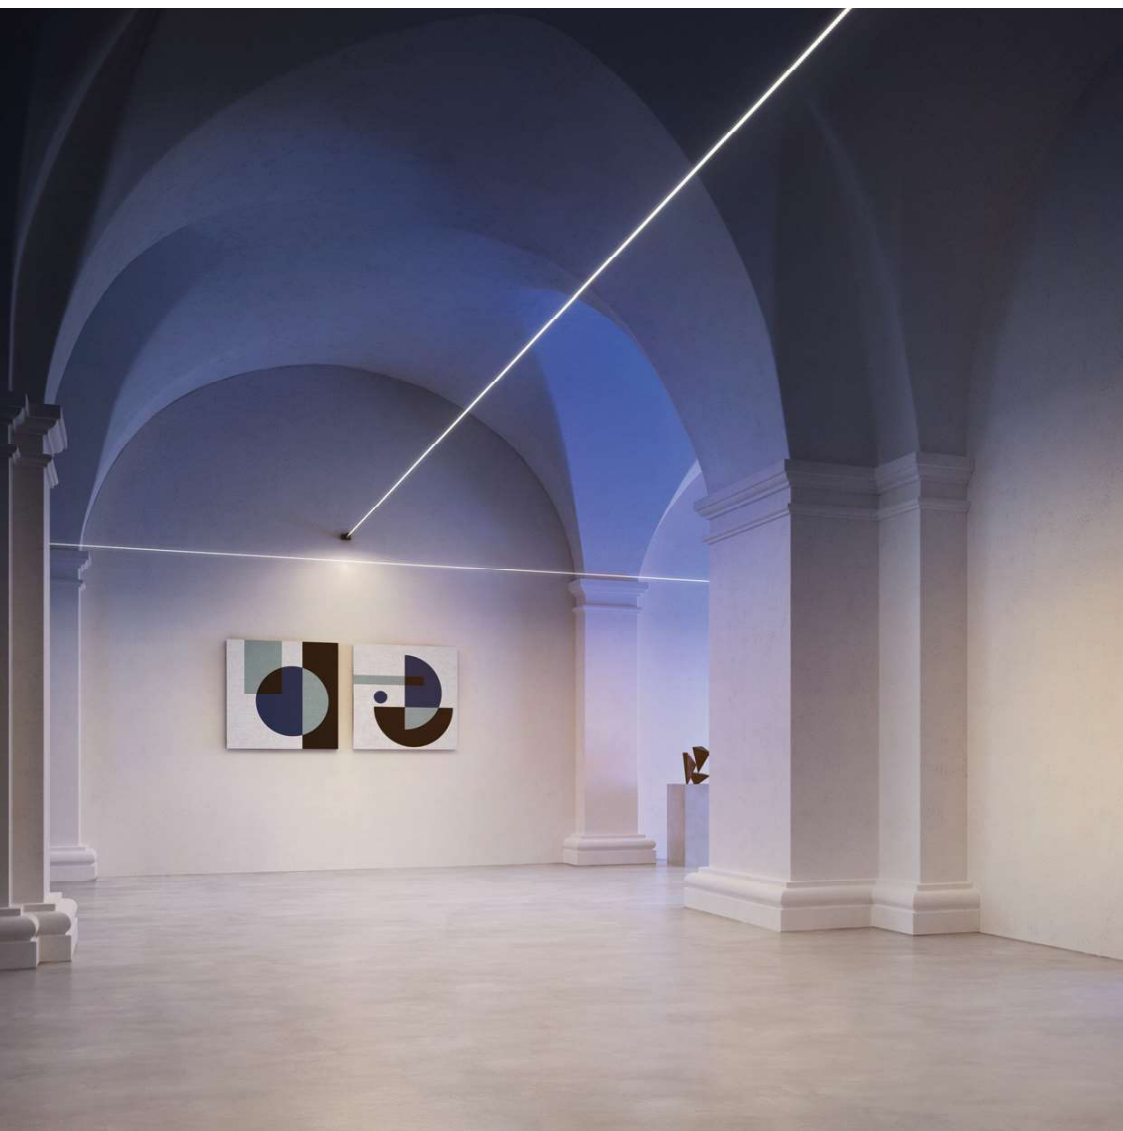

FLASH

Davide Groppi / 2017


It is our Infinito model turned around, with the light flowing downwards.
The 9 mm wide stainless steel strip can run perfectly up to 36 metres in length
(standard versions at 6 / 12 / 18 metres in length).
The ideal solution for direct illumination of spaces with very high ceilings.
Its name pays homage to the famous comic book superhero,
who can run seven times the speed of light.
Luminaire designed also to be powered by ENDLESS system.

È la declinazione del nostro modello Infinito, ma con la luce diretta verso il basso.
Il nastro in acciaio inossidabile, largo 9 millimetri, può essere teso perfettamente
fino a 36 metri di lunghezza (lampada standard 6 / 12 / 18 metri).
La soluzione ideale per l'illuminazione diretta di spazi con grande altezza.
Il nome è un omaggio al leggendario supereroe dei fumetti.
Famoso perché corre sette volte più veloce della luce...
Apparecchio illuminante alimentabile anche con il sistema ENDLESS.


FLASH 6 - FLASH 12 - FLASH 18

Davide Groppi / 2017

How to order -
FLASH 6

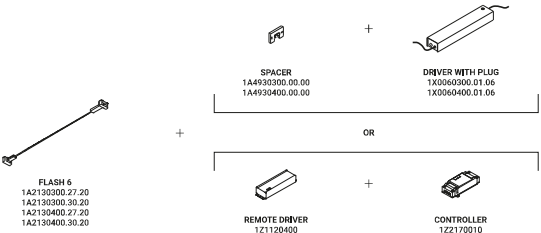

How to order -
FLASH 12

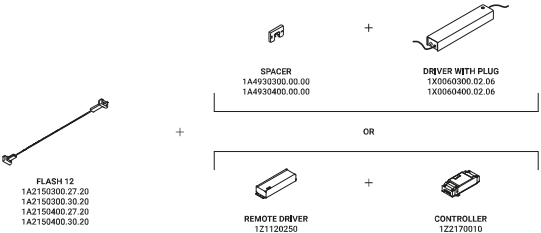

How to order -
FLASH 18



The sizes are expressed in millimeters.

FLASH

Davide Groppi / 2017


Wall-Systems / Direct / Indoor

Material	Metal
Finish	.03 Matt White .04 Matt Black

Note

Special stainless steel tape (9 mm) running from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Dual Emission (DE) and Tunable White (TW - 5 / 10 m) versions. LED strip that can be divided every 96,6 mm. DE versions are available with dual on/off (two drivers required). FLASH 6 and FLASH 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models.


Speciale nastro (9 mm) in acciaio inox teso da parete a parete. Disponibile da 6/12/18 m con un'unica alimentazione e illuminamento uniforme. Disponibile in versione a Doppia Emissione (DE) e in versione Tunable White (TW - 5 / 10 m). Strip LED sezionabile ogni 96,6 mm. Le versioni DE sono realizzabili con doppia accensione (necessari due driver). FLASH 6 e FLASH 12: apparecchi illuminanti alimentabili anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS.



FLASH 6
57W - 1,48A
48V DC
2700K - 6576lm / 3000K - 6708lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K


1A2130300.27.20
1A2130300.30.20
1A2130400.27.20
1A2130400.30.20



FLASH 12
114W - 2,97A
48V DC
2700K - 13152lm / 3000K - 13416lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A2150300.27.20
1A2150300.30.20
1A2150400.27.20
1A2150400.30.20



FLASH 18
171W
48V DC
2700K - 19728lm / 3000K - 20124lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A2900300.27.20
1A2900300.30.20
1A2900400.27.20
1A2900400.30.20


FLASH 6 DE - FLASH 12 DE - FLASH 18 DE

Davide Groppi / 2017


How to order -
FLASH 6 DE



How to order -
FLASH 12 DE




How to order -
FLASH 18 DE



The sizes are expressed in millimeters.

FLASH


Davide Groppi / 2017



FLASH 6 DE
Dual emission
114W
48V DC
2700K - Up 6576lm - Down 6576lm /
3000K - Up 6708lm - Down 6708lm
CRI >90
Driver not included
C E IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K


1A1290300.27.20
1A1290300.30.20
1A1290400.27.20
1A1290400.30.20



FLASH 12 DE
Dual emission
228W
48V DC
2700K - Up 13152lm - Down 13152lm /
3000K - Up 13416lm - Down 13416lm
CRI >90
Driver not included
C E IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1300300.27.20
1A1300300.30.20
1A1300400.27.20
1A1300400.30.20



FLASH 18 DE
Dual emission
342W
48V DC
2700K - Up 19728lm - Down 19728lm /
3000K - Up 20124lm - Down 20124lm
CRI >90
Driver not included
C E IP20


Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1310300.27.20
1A1310300.30.20
1A1310400.27.20
1A1310400.30.20


FLASH 5 TW - FLASH 10 TW

Davide Groppi / 2017

How to order -
FLASH 5 TW



How to order -
FLASH 10 TW




The sizes are expressed in millimeters.

Davide Groppi / 2017


FLASH

Note Tunable White describes the variable colour temperature controls from warm white to cool white light. *Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*



FLASH 5 TW
Tunable White
96W
24V DC
2700K - 4690lm / 6500K - 5190lm
CRI >90
Driver not included
C E IP20

Matt White - 2700K / 6500K	1A4820300.96.20
Matt Black - 2700K / 6500K	1A4820400.96.20




FLASH 10 TW
Tunable White
192W
24V DC
2700K - 9380lm / 6500K - 10380lm
CRI >90
Driver not included
C E IP20

Matt White - 2700K / 6500K	1A4830300.96.20
Matt Black - 2700K / 6500K	1A4830400.96.20


FLASH 5 DE TW - FLASH 10 DE TW

Davide Groppi / 2017

How to order -
FLASH 5 DE TW



How to order -
FLASH 10 DE TW




The sizes are expressed in millimeters.

FLASH

Davide Groppi / 2017


Note Tunable White describes the variable colour temperature controls from warm white to cool white light. *Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*



FLASH 5 DE TW
Dual emission - Tunable White
192W
24V DC
2700K - 9380lm / 6500K - 10380lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4840300.96.20
1A4840400.96.20



FLASH 10 DE TW
Dual emission - Tunable White
384W
24V DC
2700K - 18760lm / 6500K - 20760lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K


1A4850300.96.20
1A4850400.96.20

FLASH


Davide Groppi / 2017

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	FLASH 6	1X0060300.01.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	FLASH 6	1X0060400.01.06	




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	FLASH 12	1X0060300.02.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	FLASH 12	1X0060400.02.06	




Driver / Alimentatore				Not included
100-240V	48V/80W/IP67/1-10V	FLASH 6 / FLASH 6 DE	1Z1120400	



Driver / Alimentatore				Not included
100-240V	48V/150W/IP67/1-10V	FLASH 12 / FLASH 12 DE	1Z1120250	



Driver / Alimentatore				Not included
100-240V	48V/240W/IP67/1-10V	FLASH 18 / FLASH 18 DE	1Z1120390	



Driver / Alimentatore				Not included
100-240V	24V/120W/IP67/1-10V	FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z1120240	

The sizes are expressed in millimeters.

FLASH

Davide Groppi / 2017

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Controller			Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 18 DE	1Z2170010	



Controller Casambi - Tunable White			Not included
	FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z2360010	

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Spacer / Distanziale			Not included
Matt White	For driver kit with plug	FLASH 6 / FLASH 12	1A4930300.00.00
Matt Black	For driver kit with plug	FLASH 6 / FLASH 12	1A4930400.00.00



Ceiling installation kit / Kit d'installazione da soffitto			Not included
Matt White			1A0080300.00.00
Matt Black			1A0080400.00.00



Kit wall connection vertical sloped 45° / Kit attacco da parete per inclinazione verticale 45°			Not included
Matt White			1A0120300.00.00
Matt Black			1A0120400.00.00




Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro			Not included
Matt White			1A0340300.00.00
Matt Black			1A0340400.00.00




Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro			Not included
Matt White			1A0350300.00.00
Matt Black			1A0350400.00.00




Swallows / Rondini			Not included
Matt Black			1A0800400.00.00

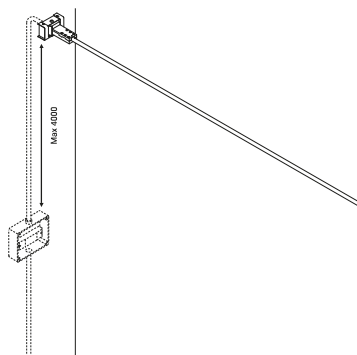


Example of installation with remote driver

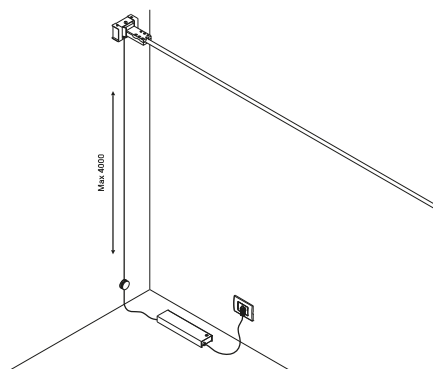


Example of installation with driver with plug

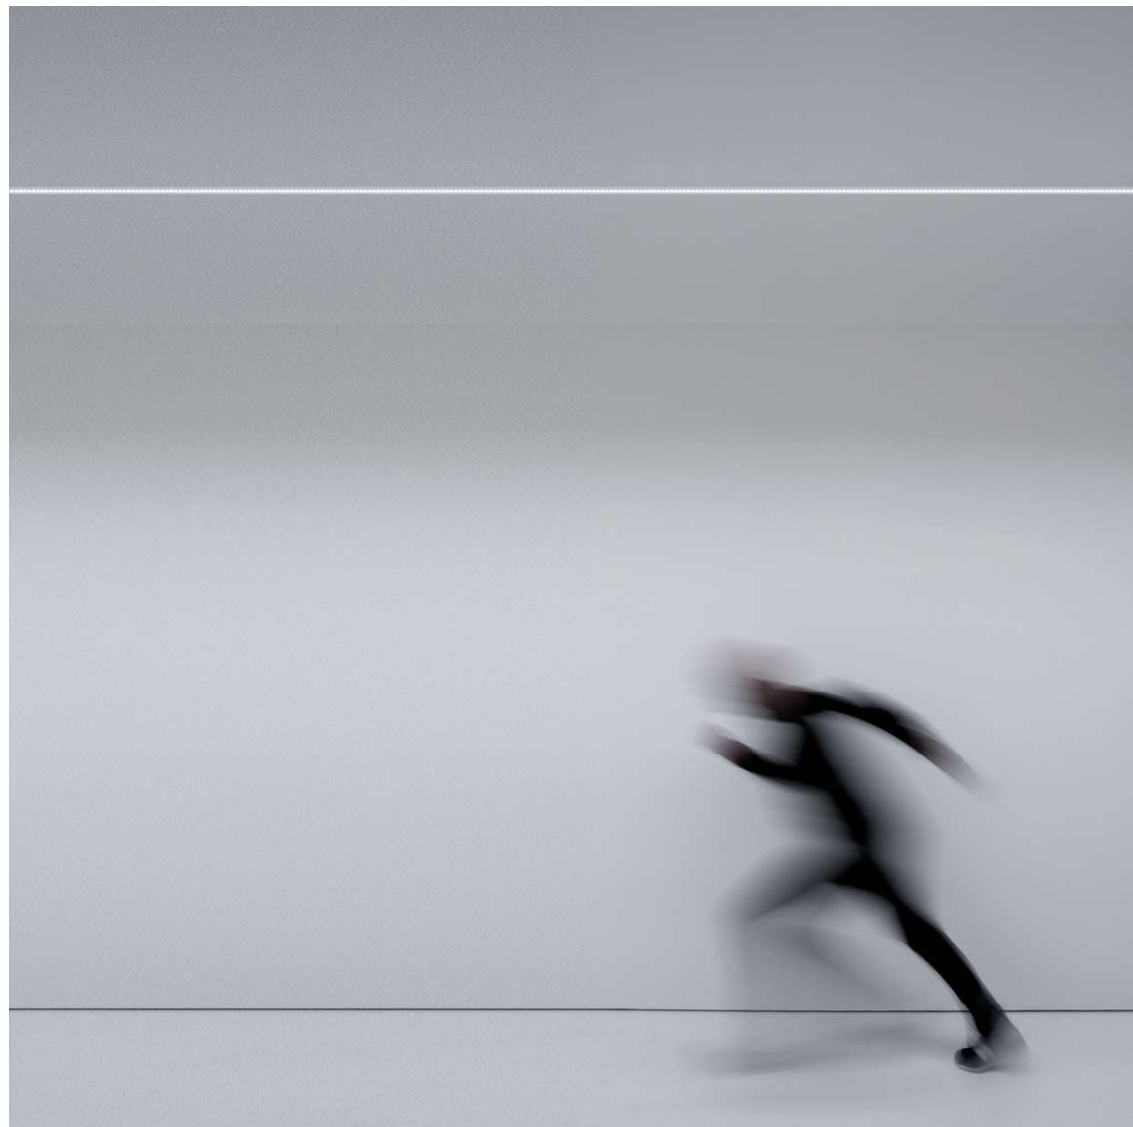


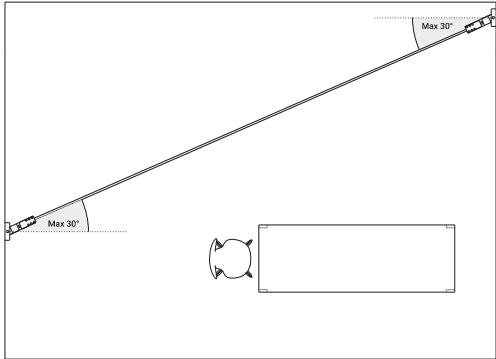


Example of installation with max rotation 30°

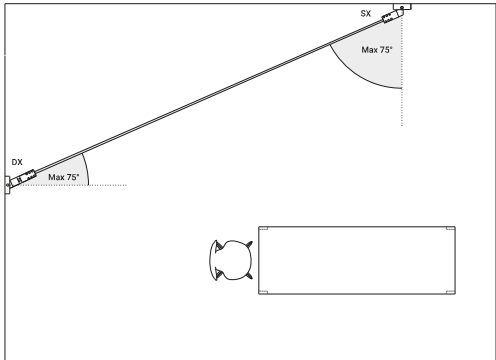

1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

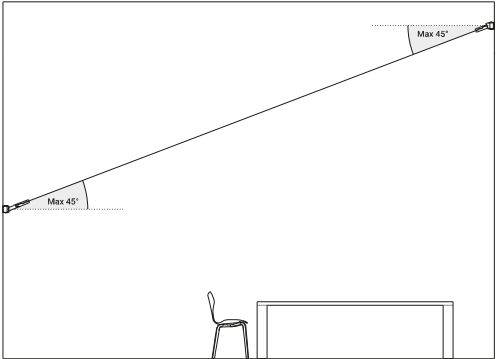

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

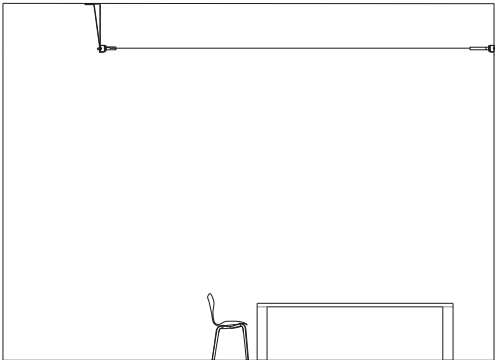

1A0080400.00.00 - Example of installation with ceiling installation kit