

Fountain Ring 9x 2 Watt TRILED RGB


PROLED®



The PROLED FOUNTAIN RING is conceived for underwater illumination of fountains and water gardens.

- dimmable, autom. colour change, DMX 512, DALI, 1-10 V controllable by MBNLED RGB MULTI power supplies or MBNLED PRO CONTROLLER RGB MULTI

This IP68 luminaire can not be operated out of water for over 15 minutes (cooling).

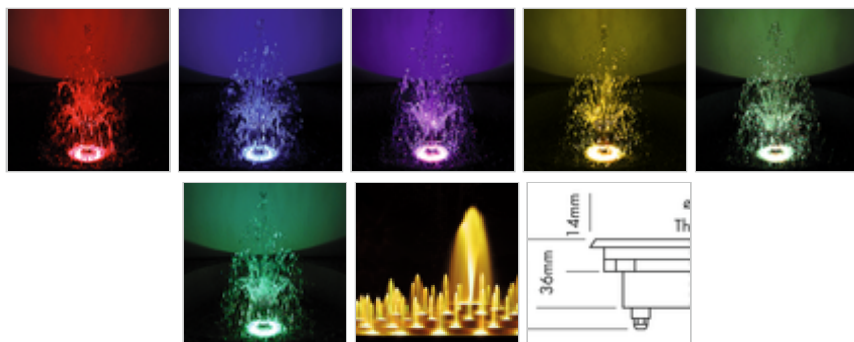

TECHNICAL DATA

IP classification:	IP68 (for underwater use max. 1 m)
Power source:	24 VDC Common Cathode (CC)
Housing:	stainless steel 316, 5 mm tempered glass
Electrical connection:	1x cable 3 m H05RN-F 4x 1,0 mm ² with 4-PIN IP68 connector male
Operating temperature range:	-10° C till +40° C

PHOTOMETRIC DATA

LED type:	HARVATEK RGB 3-in-1 LEDs
Luminous flux:	red 210 Lumen green 450 Lumen blue 120 Lumen r+g+b (white) 770 Lumen
Wave length:	red 621 nm green 525 nm blue 469 nm

Beam angle:	25°
Due to conditions of production photometric data can vary from production batch to production batch within the EU directive.	

PRODUCT TYPES

order code	colour	LED pcs	LED power	power consumption*	weight	EEI
L1340	RGB	9	18 Watt	28 Watt	2,7 kg	B

*Actual power consumption