



## Model Sheet

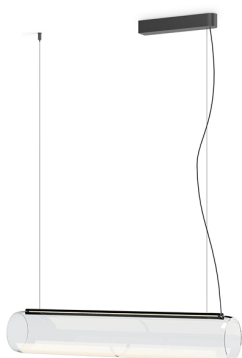

**Optional : Extra cable length**  
Min. quantity, upcharge and extra lead time apply

|                              |                                   |
|------------------------------|-----------------------------------|
| <b>Finish</b>                | 18 Graphite<br>ADAPTA RF 9913 WX  |
| <b>LED temperature color</b> | 3000 K                            |
| <b>Dimming</b>               | Optical sensor / DALI-2 / Casambi |
| <b>Installation type</b>     | Surface Canopy                    |


|                     |                                                                                                                                                                                               |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Materials</b>    | Profile: Aluminum<br>Diffuser: Borosilicate                                                                                                                                                   |
| <b>Light source</b> | 1 x LED STRIP 24V 30W<br>G                                                                                                                                                                    |
| <b>LED</b>          | CRI>90 2613.6 lm 87.12<br>3000 K                                                                                                                                                              |
| <b>Driver</b>       | Constant Voltage 100~240 V V<br>50~60 Hz HZ                                                                                                                                                   |
| <b>Remarks</b>      | The glass is made of borosilicate. It is typical for the glass to have small air bubbles, some inclusions and tiny scratches. These do not affect the quality or the resistance of the glass. |

|                    |                                                                                        |
|--------------------|----------------------------------------------------------------------------------------|
| <b>Application</b> | Hanging lamps                                                                          |
| <b>Packaging</b>   | 1 Box<br>1.18 m x 0.35 m x 0.37 m<br>Gross weight 9.5<br>Net weight 7.5<br>Vol. 0.1528 |



### Lighting effect

#### Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface




### Photometric Data

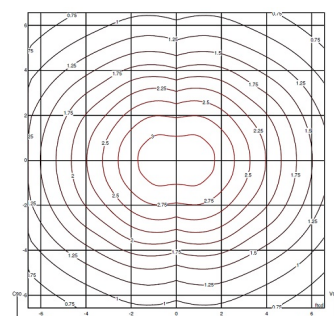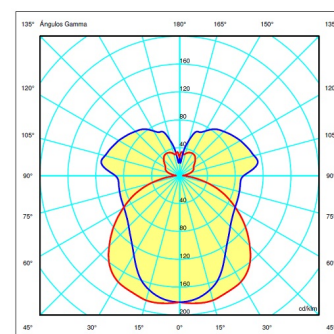


|                          |               |
|--------------------------|---------------|
| <b>Efficiency</b>        | 1             |
| <b>Coordinate System</b> | CG            |
| <b>Total Flux</b>        | 1158.86 lm    |
| <b>Maximum Value</b>     | 185.32 cd/klm |

### Other Applications



Model Sheet

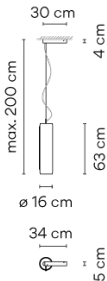

Optional : Extra cable length  
Min. quantity, upcharge and extra lead time  
apply



|                       |                                   |
|-----------------------|-----------------------------------|
| Finish                | 18 Graphite<br>ADAPTA RF 9913 WX  |
| LED temperature color | 3000 K                            |
| Dimming               | Optical sensor / Casambi / DALI-2 |
| Instalation type      | Surface Canopy                    |

|              |                                                                                                                                                                                               |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Materials    | Profile: Aluminum<br>Diffuser: Borosilicate                                                                                                                                                   |
| Light source | 1 x LED STRIP 24V 20W<br>G                                                                                                                                                                    |
| LED          | CR>90 1742.4 lm 87.12<br>3000 K                                                                                                                                                               |
| Driver       | Constant Voltage 110~240 V V<br>50~60 Hz HZ                                                                                                                                                   |
| Remarks      | The glass is made of borosilicate. It is typical for the glass to have small air bubbles, some inclusions and tiny scratches. These do not affect the quality or the resistance of the glass. |
|              | Dimmer LED<br>IP20 Bi-volt Dry Location 50-60Hz                                                                                                                                               |


|             |                                                                                      |
|-------------|--------------------------------------------------------------------------------------|
| Application | Hanging lamps                                                                        |
| Packaging   | 1 Box<br>0.87 m x 0.35 m x 0.37 m<br>Gross weigth 7.5<br>Net weigth 5<br>Vol. 0.1126 |

Lighting effect

**Volumetric Diffuser**  
Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface

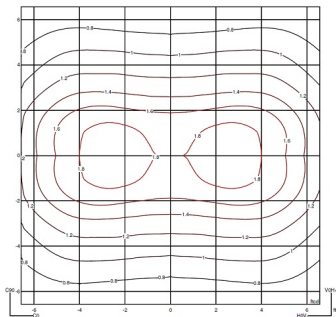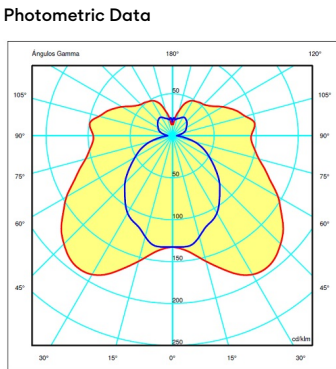


|                   |               |
|-------------------|---------------|
| Efficiency        | 1             |
| Coordinate System | CG            |
| Total Flux        | 905.64 lm     |
| Maximum Value     | 195.12 cd/klm |

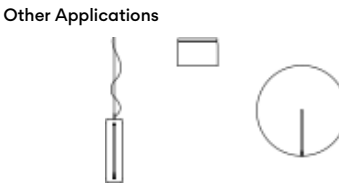

Vibia presents a pendant lamp where the light source is invisible, emanating directly from the material. The light is equipped with a counterweight placed on the ground with a cable with plug for this reason it is not necessary to have a light point on the ceiling.

## Model Sheet

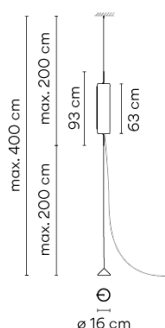

**Optional : Extra cable length**  
Min. quantity, upcharge and extra lead time apply

**Finish** 18 Graphite  
ADAPTA RF 9913 WX

**LED temperature color** 3000 K

**Dimming** Optical sensor

**Installation type** Surface Canopy

**Materials** Profile: Aluminum  
Diffuser: Borosilicate

**Light source** 1 x LED STRIP 24V 20W



**LED** CRI>90 1742.4 lm 87.12  
3000 K

**Driver** Constant Voltage 100~240 V V  
50~60 Hz HZ

**Remarks** The glass is made of borosilicate. It is typical for the glass to have small air bubbles, some inclusions and tiny scratches. These do not affect the quality or the resistance of the glass.

☐ ☒ **Dimmer** **LED**

**IP20** **Bi-volt** **Dry Location** **50-60Hz**


**Application** Hanging lamps

**Packaging** 1 Box  
1.18 m x 0.35 m x 0.37 m  
Gross weight 8.2  
Net weight 5  
Vol. 0.1528



### Lighting effect

#### Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



### Photometric Data

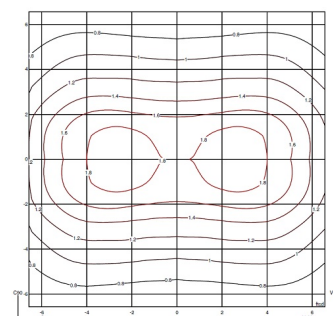
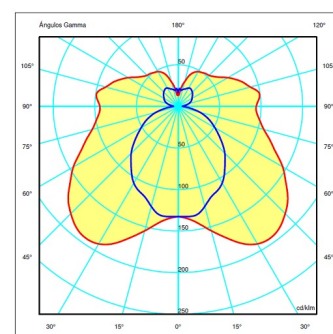


**Efficiency** 1  
**Coordinate System** CG  
**Total Flux** 905.64 lm  
**Maximum Value** 195.12 cd/klm

### Other Applications



### Model Sheet

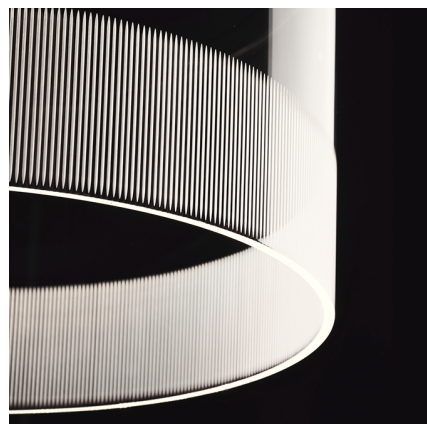


**Optional : Extra cable length**  
Min. quantity, upcharge and extra lead time apply

|                              |                                                                                                                                                                                                                           |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Finish</b>                | 18 Graphite<br>ADAPTA RF 9913 WX                                                                                                                                                                                          |
| <b>LED temperature color</b> | 3000 K                                                                                                                                                                                                                    |
| <b>Dimming</b>               | Push; 1-10V / DALI-2 / Casambi / Optical sensor                                                                                                                                                                           |
| <b>Installation type</b>     | Surface Canopy                                                                                                                                                                                                            |
| <b>Materials</b>             | Ceiling rose: Steel<br>Body: Aluminum                                                                                                                                                                                     |
| <b>Light source</b>          | 1 x LED STRIP 24V 12W<br>G                                                                                                                                                                                                |
| <b>LED</b>                   | CRI>90 1069 lm 118 3000 K                                                                                                                                                                                                 |
| <b>Driver</b>                | Constant Voltage 110~240 V V<br>50~60 Hz HZ                                                                                                                                                                               |
| <b>Remarks</b>               | Sensor on the LED base<br><div> <div> <div></div> <div>F</div> <div>Dimmer</div> </div> <div> <div></div> <div>LED</div> </div> </div> <div> <div>IP20</div> <div>Bi-volt</div> <div>50-60Hz</div> <div>PUSH</div> </div> |
| <b>Application</b>           | Hanging lamps                                                                                                                                                                                                             |
| <b>Packaging</b>             | 1 Box<br>0.385 m x 0.385 m x 0.3 m<br>Gross weight 3.3<br>Net weight 2.1<br>Vol. 0.0444                                                                                                                                   |



#### Lighting effect

##### Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



#### Photometric Data

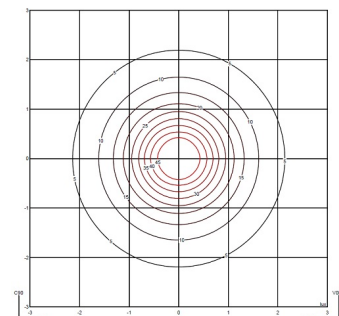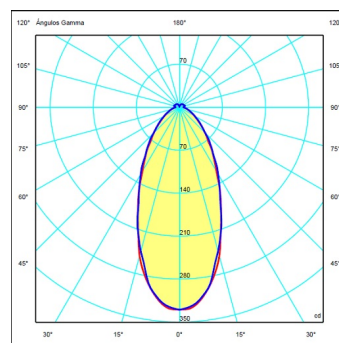


|                          |            |
|--------------------------|------------|
| <b>Efficiency</b>        | 26.02 lm/W |
| <b>Coordinate System</b> | CG         |
| <b>Total Flux</b>        | 398.74 lm  |
| <b>Maximum Value</b>     | 329.76 cd  |

#### Other Applications



### Model Sheet




**Optional : Extra cable length**  
Min. quantity, upcharge and extra lead time apply

|                              |                                                                                                                                                                  |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Finish</b>                | 18 Graphite<br>ADAPTA RF 9913 WX                                                                                                                                 |
| <b>LED temperature color</b> | 3000 K                                                                                                                                                           |
| <b>Dimming</b>               | DALI-2 / Casambi / Push; 1-10V / Optical sensor                                                                                                                  |
| <b>Installation type</b>     | Surface Canopy                                                                                                                                                   |
| <b>Materials</b>             | Ceiling rose: Steel<br>Body: Aluminum                                                                                                                            |
| <b>Light source</b>          | 1 x LED STRIP 24V 18W<br>G                                                                                                                                       |
| <b>LED</b>                   | CRI>90 1325 lm 118 3000 K                                                                                                                                        |
| <b>Driver</b>                | Constant Voltage 220~240 V V<br>50~60 Hz HZ                                                                                                                      |
| <b>Remarks</b>               | Sensor on the LED base<br><div> <div></div> <div>F</div> <div>Dimmer</div> <div>LED</div> </div> <div> <div>IP20</div> <div>50-60Hz</div> <div>PUSH</div> </div> |
| <b>Application</b>           | Hanging lamps                                                                                                                                                    |
| <b>Packaging</b>             | 1 Box<br>0.54 m x 0.54 m x 0.42 m<br>Gross weight 11.7<br>Net weight 9.7<br>Vol. 0.1224                                                                          |



#### Lighting effect

##### Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



#### Photometric Data

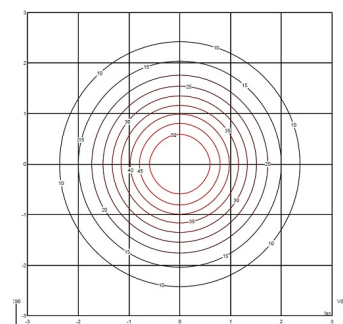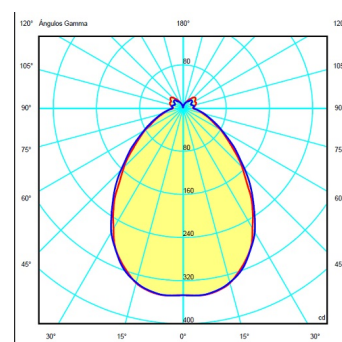

|                          |            |
|--------------------------|------------|
| <b>Efficiency</b>        | 38.65 lm/W |
| <b>Coordinate System</b> | CG         |
| <b>Total Flux</b>        | 868.47 lm  |
| <b>Maximum Value</b>     | 348.73 cd  |

#### Other Applications

