


Wall light for reading. Designed by Lievore, Altherr, Molina. The mechanisms for rotating the head and the base are concealed, thanks to the high technical quality of all the processes involved in the creation of this piece. Switch in the base for convenience.

Model Sheet



Finish

25 Beige D1
NCS S 4005-Y50R

42 Blue M1
NCS S 5010-B10G

37 Terra Red
NCS S 4040-Y70R

21 Black Grey
NCS S 7000-N

10 White
NCS S 0300-N

LED 2700 K


Dimming On/Off

Installation type Wall mount



LED CRI>90 671 lm 115.69
2700 K

Driver Constant Current 350 220~240 V V
50~60 Hz HZ




Application Wall Lamps

Packaging 1 Box
0.21 m x 0.48 m x 0.21 m
Gross weight 1.1
Net weight 0.8
Vol. 0.0211



Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user



Photometric Data

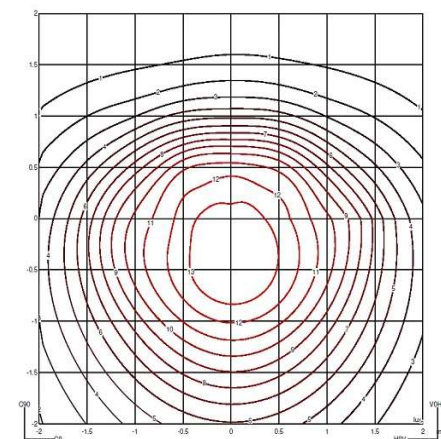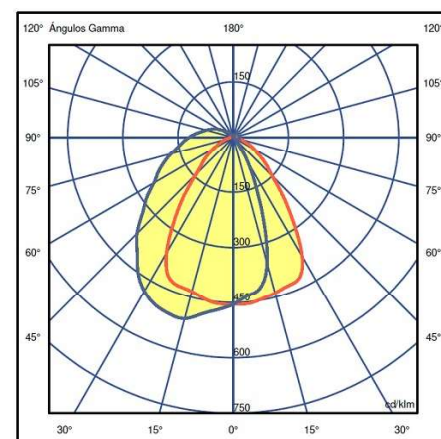

Efficiency 58.04 lm/W
Coordinate System CG
Total Flux 186 lm
Maximum Value 510.94 cd

Min. quantity, upcharge and extra lead time apply



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By Lievore Altherr Molina

Wall light for reading. Designed by Lievore, Altherr, Molina. The mechanisms for rotating the head and the base are concealed, thanks to the high technical quality of all the processes involved in the creation of this piece.

Model Sheet

Icono 0721 ambiente



Finish

- 10 White
NCS S 0300-N
- 21 Black Grey
NCS S 7000-N
- 37 Terra Red
NCS S 4040-Y70R
- 25 Beige D1
NCS S 4005-Y50R
- 42 Blue M1
NCS S 5010-B10G

LED

2700 K

Dimming

PROTOPIXEL / PUSH DALI / On/Off / CASAMBI

Installation type


Remote basic / Wall mount



LED

CRI>90 671 lm 115.69
2700 K

Driver

Constant Current 350 220~240 V V
50~60 Hz HZ

Application

Wall Lamps

Packaging

1 Box
0.21 m x 0.48 m x 0.21 m
Gross weight 1.1
Net weight 0.8
Vol. 0.0211

Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user

Icono 0721 luminica

Photometric Data

Icono 0721 polar

Icono 0721 isolux

Efficiency	58.04 lm/W
Coordinate System	CG
Total Flux	186 lm
Maximum Value	510.94 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty