

Inground 1R Mono


PROLED®



The PROLED INGROUND series is designed for floor integration and offers various design possibilities in architectural illumination.

- dimmable or DMX 512, DALI, 1-10 V controllable by MBNLED MULTI power supplies or MBNLED PRO CONTROLLER MULTI
- incl. PVC plastic mounting sleeve

➤ EULUMDAT/IES information

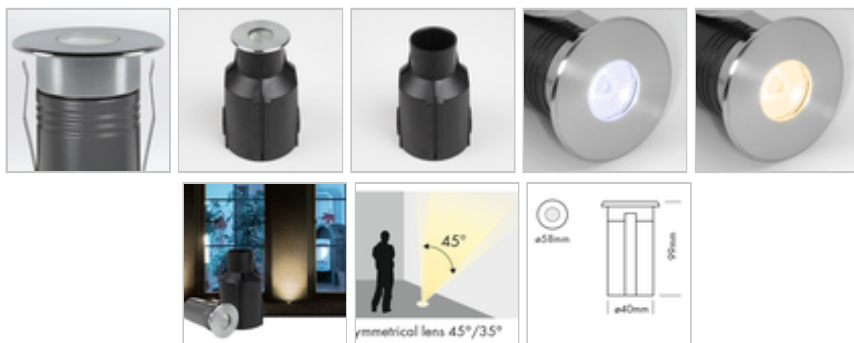

TECHNICAL DATA

IP classification:	IP67 (for outdoor use)
Power source:	24 VDC
Ring:	stainless steel 316
Housing:	powder coated aluminium grey, 7 mm tempered glass
Mounting sleeve:	PVC plastic
Load capacity:	full area = 1700 kg

PHOTOMETRIC DATA

LED type:	OSRAM 2 Watt high power
Luminous flux:	white 150 Lumen warm white 130 Lumen
Colour temperature:	white 6500 K warm white 3000 K
CRI:	white 70 warm white 80

Electrical connection cable 0,5 m H05BN-F 2x 1,0 mm ² to open wires				Beam angle: 15° (optional), 30° and asymmetrical 45°/35°			
order code	product colour	beam angle	LED pcs	LED power	power consumption	weight	EEI
Operating temperature range: -10° C till +45° C				Due to conditions of production photometric data can vary from production batch to production batch within the EU directive.			

PRODUCT TYPES

order code	colour	beam angle	LED pcs	LED power	power consumption*	weight	EEL
L17114R1Y	white	15°	1	2 Watt	3 Watt	0,37 kg	A
L17114R3Y	white	30°	1	2 Watt	3 Watt	0,37 kg	A
L17114RAY	white	asym. 45°/35°	1	2 Watt	3 Watt	0,37 kg	A
L17116R3Y	warm white	30°	1	2 Watt	3 Watt	0,37 kg	A
L17116RAY	warm white	asym. 45°/35°	1	2 Watt	3 Watt	0,37 kg	A

*Actual power consumption

ACCESSORIES

product description		size	
	Ring stainless steel round	ø 58 mm	»
	Ring stainless steel square	58 x 58 mm	»
	Ring stainless steel cambered round	ø 58 mm	»
	Ring stainless steel cambered square	58 x 58 mm	»
	Ring stainless steel chrome round	ø 58 mm	»
	Ring stainless steel chrome square	58 x 58 mm	»

product description		size
	PVC plastic mounting sleeve	»