



6434

Design By Sebastian Herkner

The convex shade pendant features an open frame imbedded with LEDs that contains a reflector formed from a rounded sheet of metal. It floats from nearly invisible cables overhead, casting a diffuse glow that evokes the look of raining light.

Model Sheet

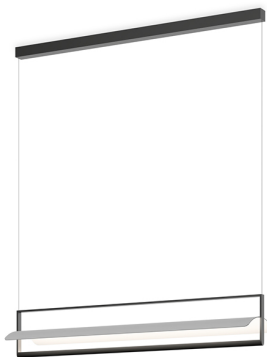

Optional: Extra cable length
Min. quantity, upcharge and extra lead time apply

Finish 11 Black
NCS S 8500-N

LED temperature color 2200 K / 2700 K / 3000 K / 3500 K
Optional 2200 K / 2700 K / 3000 K / 3500 K
Min. quantity, upcharge and extra lead time apply

Dimming 1-10V / DALI / Push / Casambi

Installation type Wall mount


Materials Body: Aluminum
Reflector: Aluminum
Driver box: Aluminum

Light source 1 x LED STRIP 20,8W 750mA



LED CRI>90 2165 lm 104
2200 K / 2700 K / 3000 K / 3500 K

Driver Constant Current 750 90~305
V V 50~60 Hz HZ




Application Hanging lamps

Packaging 1 Box
1.132 m x 0.3 m x 0.3 m
Gross weight 6.5
Net weight 4.5
Vol. 0.1018



Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the product




Photometric Data

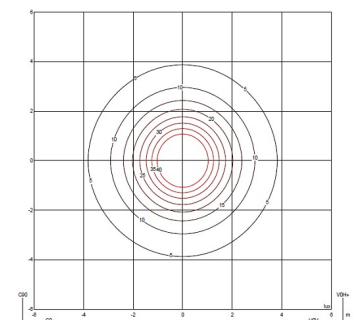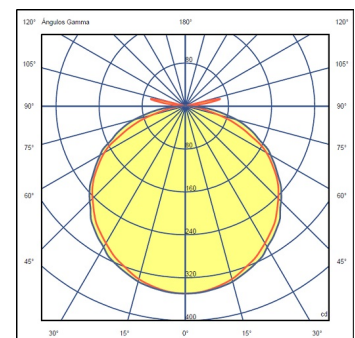

Efficiency 45.26 lm/W
Coordinate System CG
Total Flux 1117.95 lm
Maximum Value 349.46 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

6436

Design By Sebastian Herkner

The convex shade pendant features an open frame imbedded with LEDs that contains a reflector formed from a rounded sheet of metal. It floats from nearly invisible cables overhead, casting a diffuse glow that evokes the look of raining light.

Model Sheet

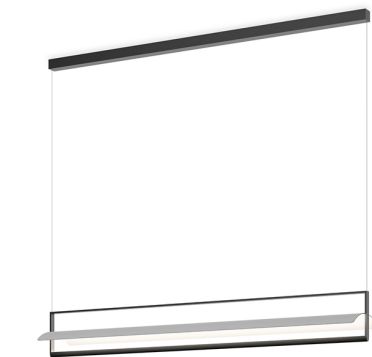


Optional: Extra cable length
Min. quantity, upcharge and extra lead time apply

Finish	11 Black NCS S 8500-N
LED temperature color	2200 K / 2700 K / 3000 K / 3500 K Optional 2200 K / 2700 K / 3000 K / 3500 K Min. quantity, upcharge and extra lead time apply
Dimming	1-10V / DALI / Push / Casambi
Installation type	Wall mount
Materials	Body: Aluminum Reflector: Aluminum Driver box: Aluminum
Light source	1 x LED STRIP 27,9W 750mA E
LED	CRI>90 2907 lm 104 2200 K / 2700 K / 3000 K / 3500 K
Driver	Constant Current 750 90~305 V V 50~60 Hz HZ Dimmable LED IP20 Multi-volt 50-60Hz 1-10V TRIAC
Application	Hanging lamps
Packaging	1 Box 1.43 m x 0.3 m x 0.3 m Gross weight 7 Net weight 5 Vol. 0.1287



Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the product




Photometric Data

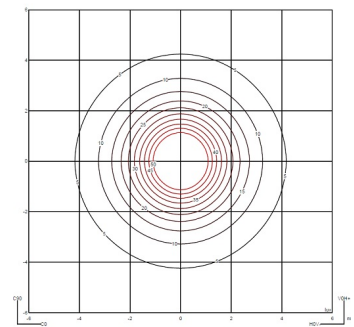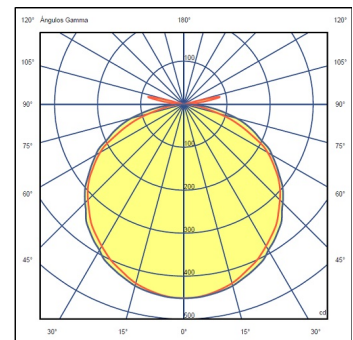

Efficiency	45.27 lm/W
Coordinate System	CG
Total Flux	1443.83 lm
Maximum Value	451.32 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970




customer.service@vibia.com
vibia.com

6438

Design By Sebastian Herkner

The convex shade pendant features an open frame imbedded with LEDs that contains a reflector formed from a rounded sheet of metal. It floats from nearly invisible cables overhead, casting a diffuse glow that evokes the look of raining light.

Model Sheet

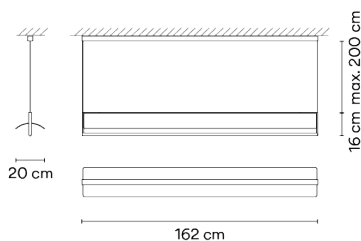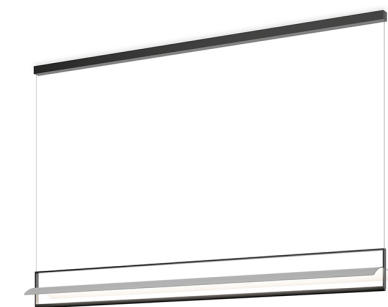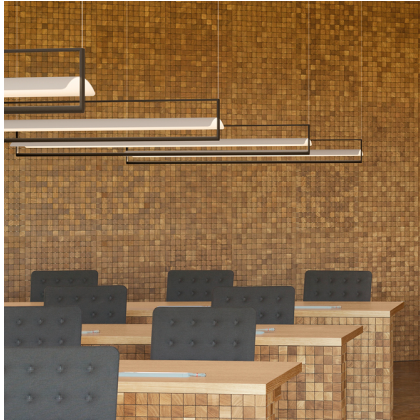

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply

Finish 11 Black
NCS S 8500-N

LED temperature color 2200 K / 2700 K / 3000 K / 3500 K
Optional 2200 K / 2700 K / 3000 K / 3500 K
Min. quantity, upcharge and extra lead time apply

Dimming 1-10V / Push / DALI / Casambi

Installation type Wall mount

Materials Body: Aluminum
Reflector: Aluminum
Driver box: Aluminum

Light source 1 x LED STRIP 37,2W 750mA



LED CRI>90 3876 lm 104
2200 K / 2700 K / 3000 K / 3500 K

Driver Constant Current 750 90-305 V V 50-60 Hz HZ



Application Hanging lamps

Packaging 1 Box
1.832 m x 0.3 m x 0.3 m
Gross weight 8
Net weight 5.5
Vol. 0.1648



Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the product




Photometric Data

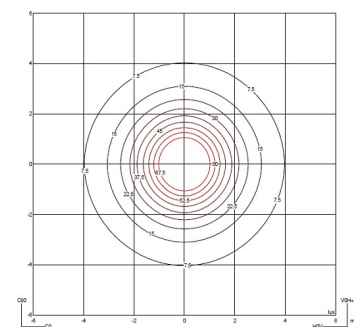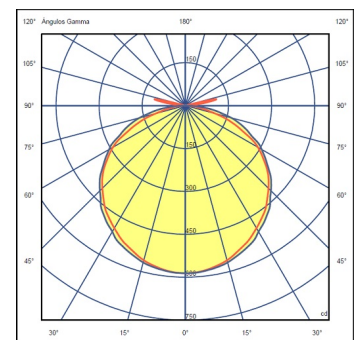

Efficiency 45.27 lm/W
Coordinate System CG
Total Flux 1874.16 lm
Maximum Value 585.84 cd

Other Applications




6474

Design By Sebastian Herkner

The glass shade pendant features an open metal frame imbedded with LEDs that contains a cylindrical diffuser made of mouthblown opaline glass. It floats from nearly invisible overhead cables, generating a warm, 360-degree glow as if from a fire.

Model Sheet




Optional: Extra cable length
Min. quantity, upcharge and extra lead time apply

Finish	11 Black NCS S 8500-N
LED temperature color	2200 K / 2700 K / 3000 K Optional 2200 K / 2700 K / 3000 K Min. quantity, upcharge and extra lead time apply
Dimming	Casambi / DALI / 1-10V / Push
Installation type	Wall mount
Materials	Body: Aluminum Shade: opal triplex glass Driver box: Aluminum
Light source	1 x LED STRIP 20,8W 750mA E
LED	CRI>90 2165 lm 104 2200 K / 2700 K / 3000 K
Driver	Constant Current 750 90~305 V V 50~60 Hz HZ
	F Dimmable LED IP20 Multi-volt 50-60Hz 1-10V TRIAC
Application	Hanging lamps
Packaging	1 Box 1.132 m x 0,3 m x 0,3 m Gross weight 9,5 Net weight 7 Vol. 0.1018



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface




Photometric Data

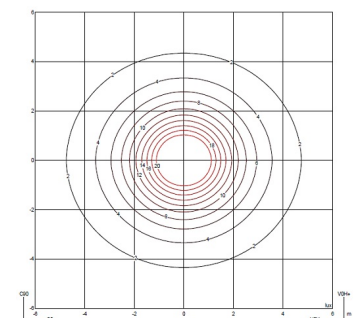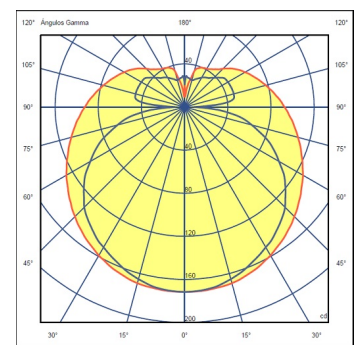

Efficiency	41.96 lm/W
Coordinate System	CG
Total Flux	1034.74 lm
Maximum Value	171.64 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970


customer.service@vibia.com
vibia.com

6476

Design By Sebastian Herkner

The glass shade pendant features an open metal frame imbedded with LEDs that contains a cylindrical diffuser made of mouthblown opaline glass. It floats from nearly invisible overhead cables, generating a warm, 360-degree glow as if from a fire.

Model Sheet



Optional: Extra cable length
Min. quantity, upcharge and extra lead time apply

Finish	11 Black NCS S 8500-N
LED temperature color	2200 K / 2700 K / 3000 K Optional 2200 K / 2700 K / 3000 K Min. quantity, upcharge and extra lead time apply
Dimming	1-10V / DALI / Push / Casambi
Installation type	Wall mount
Materials	Body: Aluminum Shade: opal triplex glass Driver box: Aluminum
Light source	1 x LED STRIP 27,9W 750mA E
LED	CRI>90 2907 lm 104 2200 K / 2700 K / 3000 K
Driver	Constant Current 750 90~305 V V 50~60 Hz HZ
	F Dimmable LED IP20 Multi-volt 50-60Hz 1-10V TRIAC
Application	Hanging lamps
Packaging	1 Box 1.43 m x 0.3 m x 0.3 m Gross weight 11 Net weight 8 Vol. 0.1287



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface




Photometric Data

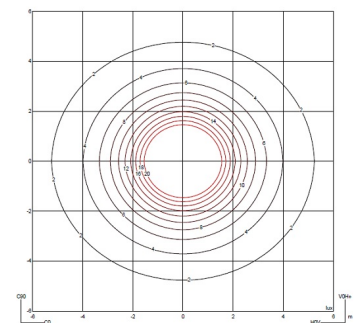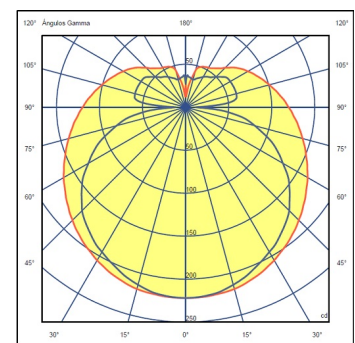

Efficiency	41.96 lm/W
Coordinate System	CG
Total Flux	1338.37 lm
Maximum Value	222.01 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com