



The convex shade wall light features an open metal frame imbedded with LEDs that contains a reflector formed from a rounded sheet. The black frame is affixed to the wall and casts a diffuse glow that evokes the look of raining light.

Model Sheet

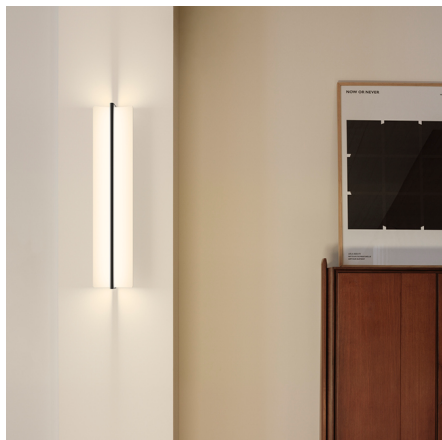

Finish

11 Black
NCS S 8500-N

LED

2200 K / 2700 K / 3000 K

Control

Casambi / 1-10V / DALI / Push

Optional

DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi

Electrical connection

Surface Canopy

Light source

1 x LED STRIP 20,8W 750mA



LED

CRI>90 2165 lm 104
2200 K / 2700 K / 3000 K

Driver

Constant Current 750 mA 90~305 V
50~60 Hz



Dimmable LED IP20 Multi-volt

Application

Wall


Packaging

1 Box
1.132 m x 0.3 m x 0.3 m
Gross weight 6 kg
Net weight 4 kg
Vol. 0.1018 m3



Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the



Photometric Data

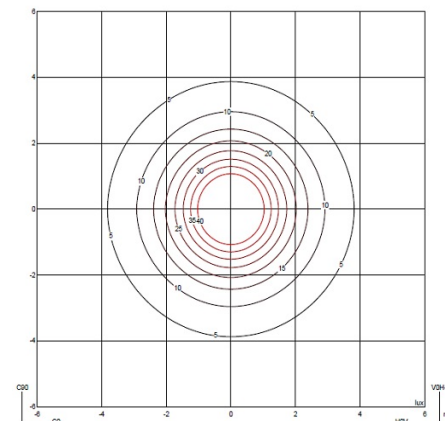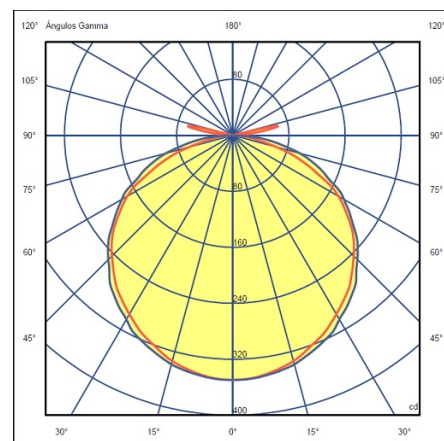


Efficiency 45.26 lm/W
Coordinate System CG
Total Flux 1117.95 lm
Maximum Value 349.46 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

The convex shade wall light features an open frame imbedded with LEDs that contains a reflector formed from a rounded sheet of metal. The black frame is affixed to the wall and casts a diffuse glow that evokes the look of raining light.

Model Sheet




Finish	11 Black NCS S 8500-N
LED	2200 K / 2700 K / 3000 K / 3500 K
Control	DALI / 1-10V / Push / Casambi
Optional	DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi
Electrical connection	Surface Canopy

Light source	1 x LED STRIP 27,9W 750mA E
LED	CRI>90 2907 lm 104 2200 K / 2700 K / 3000 K / 3500 K
Driver	Constant Current 750 mA 90~305 V 50~60 Hz Dimmable LED IP20 Multi-volt
Application	Wall
Packaging	1 Box 1.43 m x 0.3 m x 0.3 m Gross weight 6.5 kg Net weight 4.5 kg Vol. 0.1287 m3



Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the



Photometric Data

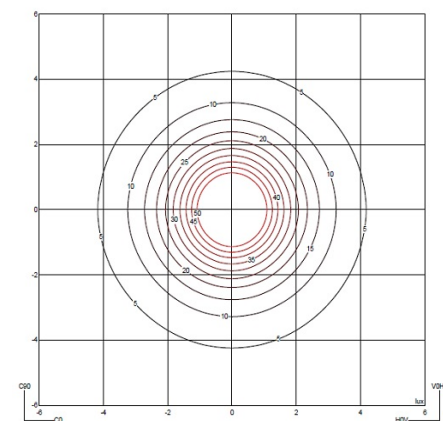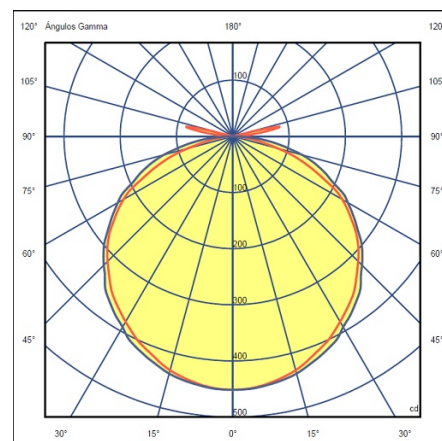


Efficiency	45.27 lm/W
Coordinate System	CG
Total Flux	1443.83 lm
Maximum Value	451.32 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

The convex shade wall light features an open frame imbedded with LEDs that contains a reflector formed from a rounded sheet of metal. The black frame is affixed to the wall and casts a diffuse glow that evokes the look of raining light.

Model Sheet




Finish	11 Black NCS S 8500-N
LED	2200 K / 2700 K / 3000 K / 3500 K
Control	1-10V / Push / DALI / Casambi
Optional	DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi
Electrical connection	Surface Canopy

Light source	1 x LED STRIP 37,2W 750mA E
LED	CRI>90 3876 lm 104 2200 K / 2700 K / 3000 K / 3500 K
Driver	Constant Current 750 mA 90~305 V 50~60 Hz Dimmable LED IP20 Multi-volt
Application	Wall
Packaging	1 Box 1.832 m x 0.3 m x 0.3 m Gross weight 7.5 kg Net weight 5 kg Vol. 0.1648 m3



Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the



Photometric Data

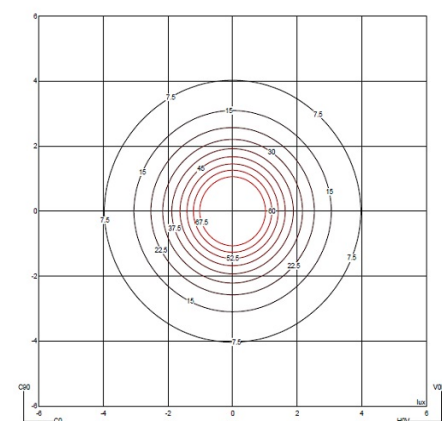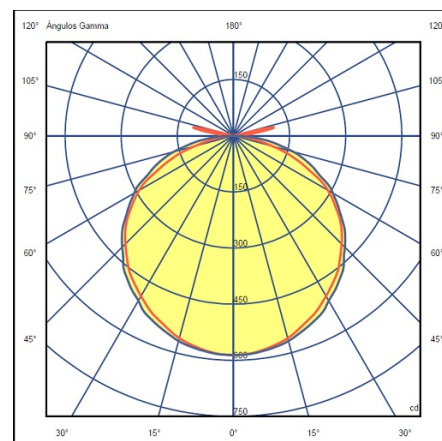

Efficiency	45.27 lm/W
Coordinate System	CG
Total Flux	1874.16 lm
Maximum Value	585.84 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Kontorno



6444

Design By Sebastian Herkner

VIBIA

The glass shade wall light features an open metal frame imbedded with LEDs that contains a cylindrical diffuser made of mouthblown opaline glass. The black frame is affixed to the wall, generating a warm, 360-degree glow as if from a fire. Install in a vertical position.

Model Sheet

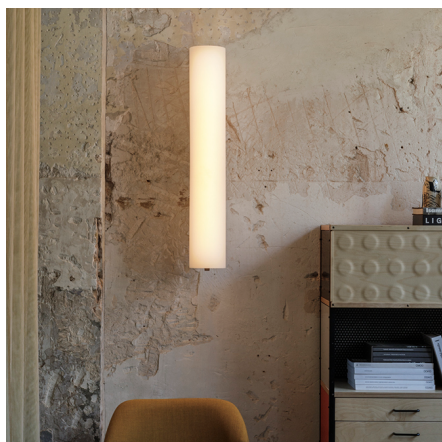


Finish	11 Black NCS S 8500-N
LED	2200 K / 2700 K / 3000 K / 3500 K
Control	Push / 1-10V / Casambi / DALI
Optional	DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi
Electrical connection	Surface Canopy

Light source	1 x LED STRIP 20,8W 750mA G
LED	CRI>90 2165 lm 104 2200 K / 2700 K / 3000 K / 3500 K
Driver	Constant Current 750 mA 90~305 V 50~60 Hz F Dimmable LED IP20 Multi-volt
Application	Wall
Packaging	1 Box 1.132 m x 0.3 m x 0.3 m Gross weight 8 kg Net weight 6.5 kg Vol. 0.1018 m ³



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

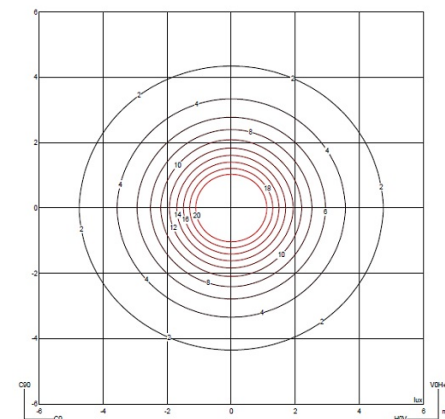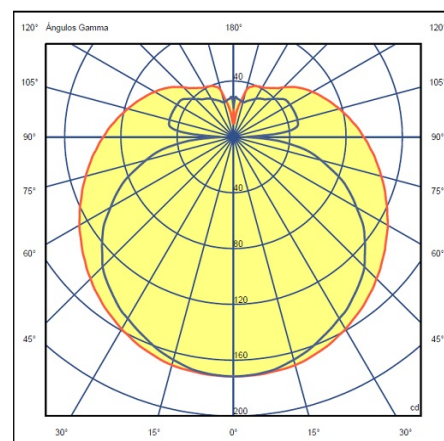

Efficiency	41.95 lm/W
Coordinate System	CG
Total Flux	1034.74 lm
Maximum Value	171.64 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.


Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

The glass shade wall light features an open metal frame imbedded with LEDs that contains a cylindrical diffuser made of mouthblown opaline glass. The black frame is affixed to the wall, generating a warm, 360-degree glow as if from a fire. Install in a vertical position.

Model Sheet




Finish	11 Black NCS S 8500-N
LED	2200 K / 2700 K / 3000 K / 3500 K
Control	Casambi / DALI / Push / 1-10V
Optional	DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi
Electrical connection	Surface Canopy

Light source	1 x LED STRIP 27,9W 750mA E
LED	CRI>90 2907 lm 104 2200 K / 2700 K / 3000 K / 3500 K
Driver	Constant Current 750 mA 90~305 V 50~60 Hz Dimmable LED IP20 Multi-volt
Application	Wall
Packaging	1 Box 1.43 m x 0.3 m x 0.3 m Gross weight 11.5 kg Net weight 7.5 kg Vol. 0.1287 m3



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

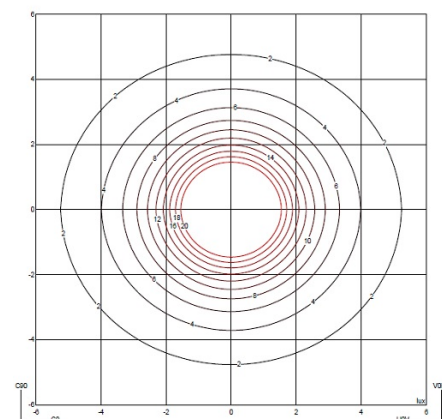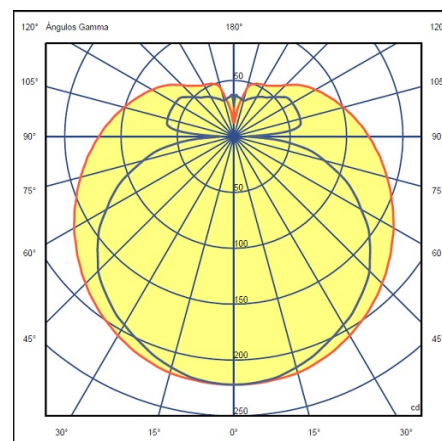

Efficiency	41.96 lm/W
Coordinate System	CG
Total Flux	1338.37 lm
Maximum Value	222.01 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty