




Design By undefined

The Line ceiling light ensures subtle integration within the surrounding architecture. The homogeneous light quality of the High Comfort diffuser is designed to create a calming, rich and relaxing atmosphere, guaranteeing soft illumination across the entire ceiling surface. Model with frame.

Model Sheet

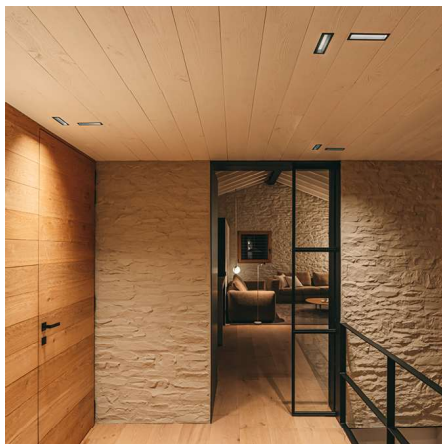

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

PUSH DALI / CASAMBI / On/Off / NO DRIVER

Optional

DALI or Push or Casambi / PUSH DALI / DALI or Push or Casambi / CASAMBI / DALI or Push or Casambi

Electrical connection Built-in

Light source

1 x LED STRIP 7,4W 350mA



LED

CRI>90 897 lm 123,9
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 350 mA 220~240 V
50~60 Hz

☐ F LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 0.02 kg
Net weight 0.01 kg
Vol. 0.0033 m3



Lighting effect

Linear High Comfort

Linear lighting applications with High lighting and comfort levels (UGR <19) for illumination in close



Photometric Data

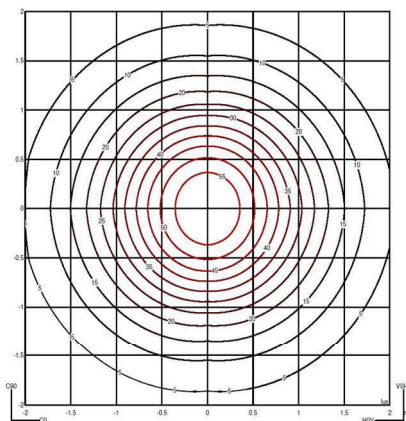
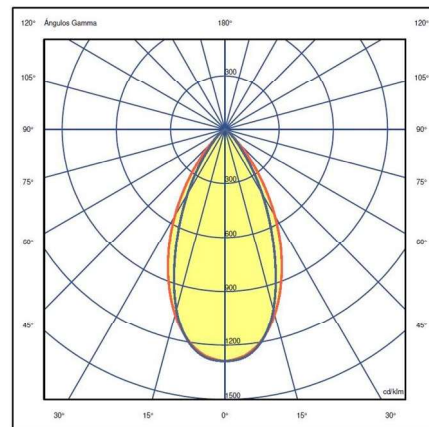


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

The Line ceiling light ensures subtle integration within the surrounding architecture. The homogeneous light quality of the High Comfort diffuser is designed to create a calming, rich and relaxing atmosphere, guaranteeing soft illumination across the entire ceiling surface. Frameless model.

Model Sheet

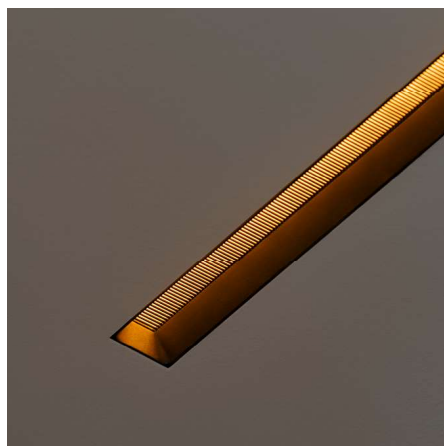

Finish

23 Warm White
NCS S 0502-Y50R

04 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

NO DRIVER / On/Off / CASAMBI / PUSH DALI

Optional

DALI or Push or Casambi / NO DRIVER / DALI or Push or Casambi / On/Off / DALI or Push or Casambi /

Electrical connection Built-in

Light source

1 x LED STRIP 7,4W 350mA



LED

CRI>90 897 lm 123,9
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 350 mA 220~240 V
50~60 Hz

☐ F LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0033 m3



Lighting effect

Linear High Comfort

Linear lighting applications with High lighting and comfort levels (UGR <19) for illumination in close



Photometric Data

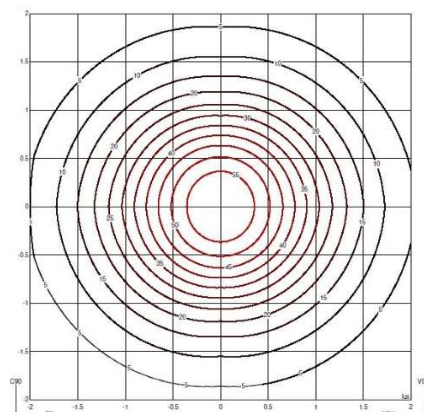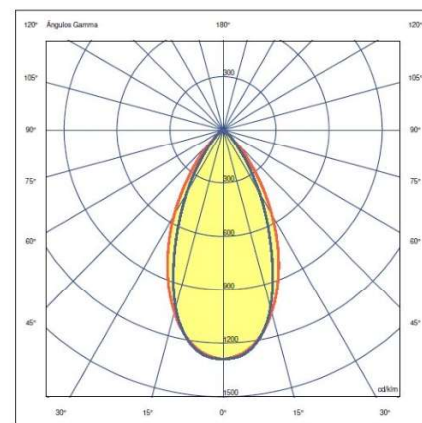



Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

The Line ceiling light ensures subtle integration within the surrounding architecture. The homogeneous light quality of the High Comfort diffuser is designed to create a calming, rich and relaxing atmosphere, guaranteeing soft illumination across the entire ceiling surface. Model with frame.

Model Sheet

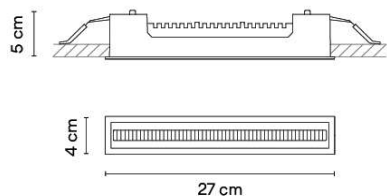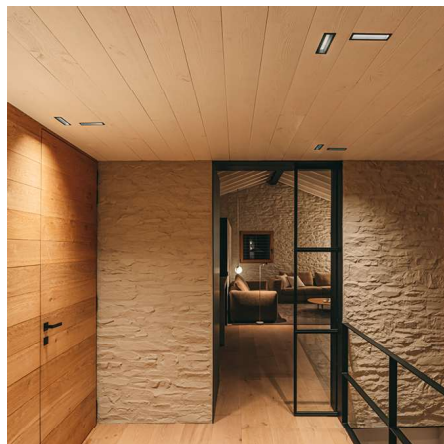

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

On/Off / NO DRIVER / CASAMBI / PUSH DALI

Optional

DALI or Push or Casambi / On/Off / DALI or Push or Casambi / NO DRIVER / DALI or Push or Casambi /

Electrical connection Built-in

Light source

1 x LED STRIP 13,7W 650mA



LED

CRI>90 1674 lm 122,63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz



Application

Ceiling


Packaging

1 Box
0,15 m x 0,3 m x 0,075 m
Gross weight 0,2 kg
Net weight 0,2 kg
Vol. 0,0033 m3



Lighting effect

Linear High Comfort

Linear lighting applications with High lighting and comfort levels (UGR <19) for illumination in close



Photometric Data

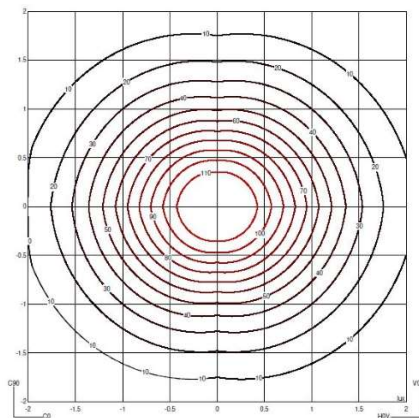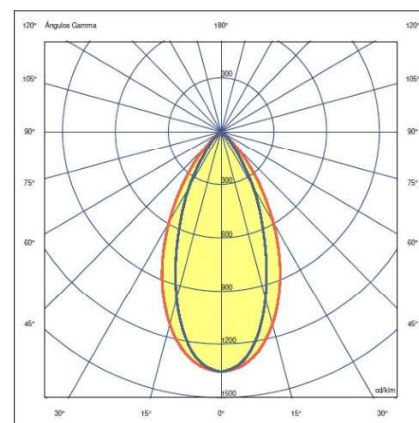



Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

The Line ceiling light ensures subtle integration within the surrounding architecture. The homogeneous light quality of the High Comfort diffuser is designed to create a calming, rich and relaxing atmosphere, guaranteeing soft illumination across the entire ceiling surface. Frameless model.

Model Sheet

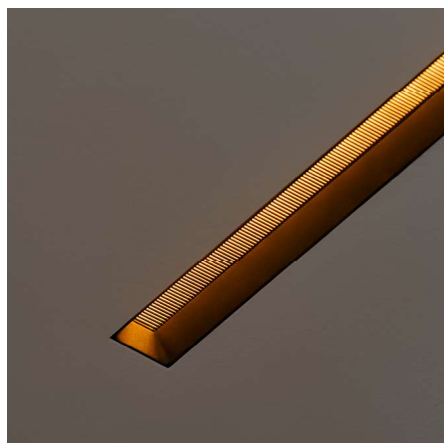

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

On/Off / NO DRIVER / CASAMBI / PUSH DALI

Optional

DALI or Push or Casambi / On/Off / DALI or Push or Casambi / NO DRIVER / DALI or Push or Casambi /

Electrical connection Built-in

Light source

1 x LED STRIP 13,7W 650mA



LED

CRI>90 1674 lm 122,63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz



Application

Ceiling


Packaging

1 Box
0,15 m x 0,3 m x 0,075 m
Gross weight 0,01 kg
Net weight 0,01 kg
Vol. 0,0033 m3



Lighting effect

Linear High Comfort

Linear lighting applications with High lighting and comfort levels (UGR <19) for illumination in close



Photometric Data

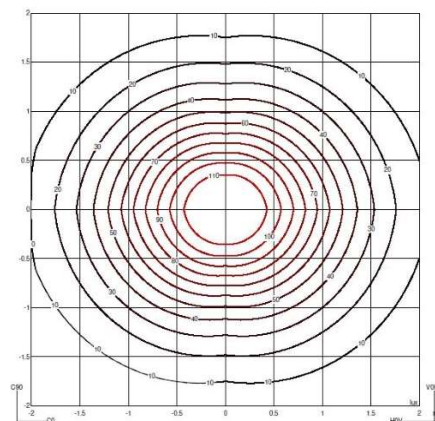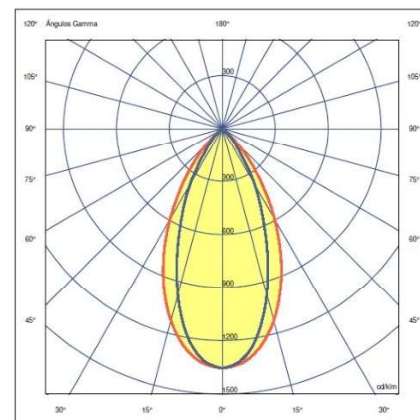



Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

The Line ceiling light ensures subtle integration within the surrounding architecture. The homogeneous light quality of the High Comfort diffuser is designed to create a calming, rich and relaxing atmosphere, guaranteeing soft illumination across the entire ceiling surface. Model with frame.

Model Sheet

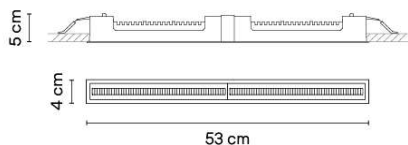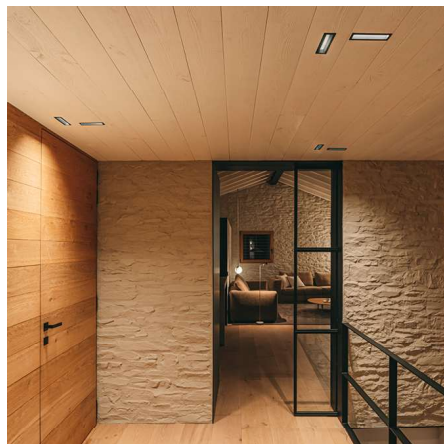

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

On/Off / CASAMBI / PUSH 1-10V
DALI / NO DRIVER

Optional

DALI or Push or Casambi / On/Off /
DALI or Push or Casambi / CASAMBI
/ DALI or Push or Casambi / PUSH

Electrical connection

Built-in

Light source

1 x LED STRIP 27,4W 650mA



LED

CRI>90 3348 lm 122,63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz

□ F LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.57 m x 0.105 m x 0.08 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0047 m³



Lighting effect

Linear High Comfort

Linear lighting applications with High lighting and comfort levels (UGR <19) for illumination in close



Photometric Data

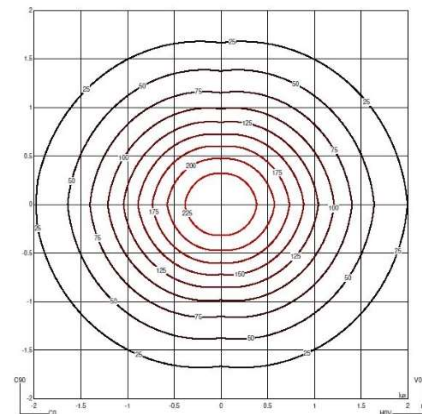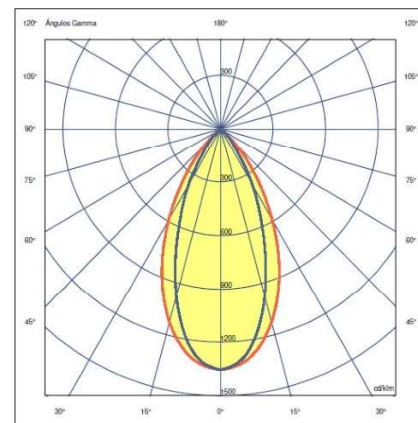

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970



customer.service@vibia.com

vibia.com

Design By undefined

The Line ceiling light ensures subtle integration within the surrounding architecture. The homogeneous light quality of the High Comfort diffuser is designed to create a calming, rich and relaxing atmosphere, guaranteeing soft illumination across the entire ceiling surface. Frameless model.

Model Sheet

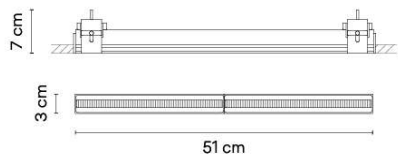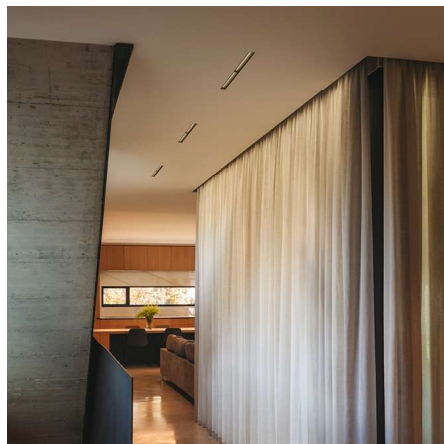

Min. quantity, upcharge and extra lead time apply

Finish

23 Warm White
NCS S 0502-Y50R

04 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

DALI / PUSH 1-10V DALI / NO DRIVER / CASAMBI

Optional

DALI or Push or Casambi / DALI / DALI or Push or Casambi / PUSH 1-10V DALI / DALI or Push or Casambi

Electrical connection Built-in

Light source

1 x LED STRIP 27,4W 650mA



LED

CRI>90 3348 lm 122.63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz



Application

Ceiling


Packaging

1 Box
0.57 m x 0.105 m x 0.08 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0047 m³



Lighting effect

Linear High Comfort

Linear lighting applications with High lighting and comfort levels (UGR <19) for illumination in close



Photometric Data

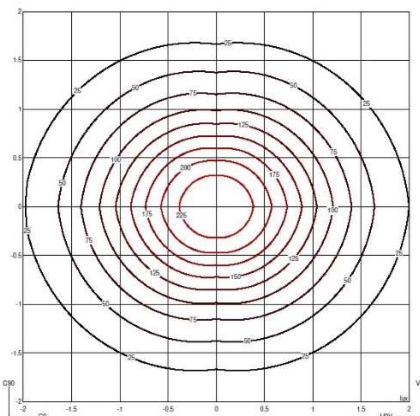
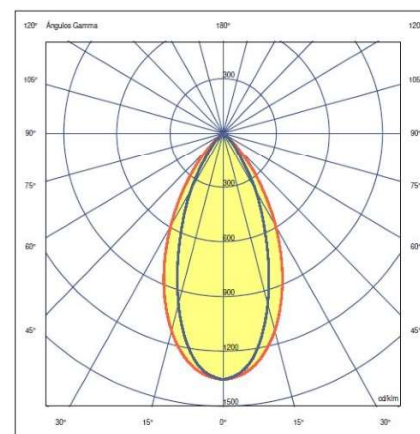


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

The Line ceiling light ensures subtle integration within the surrounding architecture. The homogeneous light quality of the High Comfort diffuser is designed to create a calming, rich and relaxing atmosphere, guaranteeing soft illumination across the entire ceiling surface. Model with frame.

Model Sheet

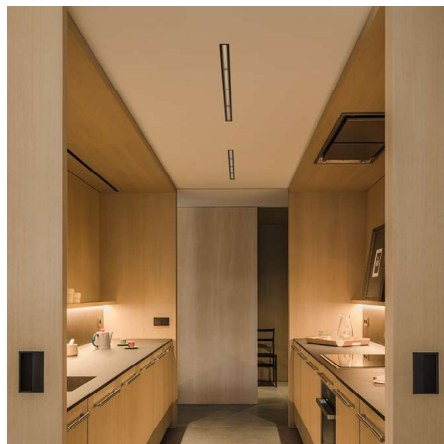

Min. quantity, upcharge and extra lead time apply

Finish

23 Warm White
NCS S 0502-Y50R

04 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

On/Off / CASAMBI / NO DRIVER / PUSH 1-10V DALI

Optional

DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi

Electrical connection Built-in

Light source

1 x LED STRIP 54,8W 650mA



LED

CRI>90 6696 lm 122.63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz

LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
1.09 m x 0.105 m x 0.08 m
Gross weight 3.25 kg
Net weight 2.36 kg
Vol. 0.0091 m³



Lighting effect

Linear High Comfort

Linear lighting applications with High lighting and comfort levels (UGR <19) for illumination in close



Photometric Data

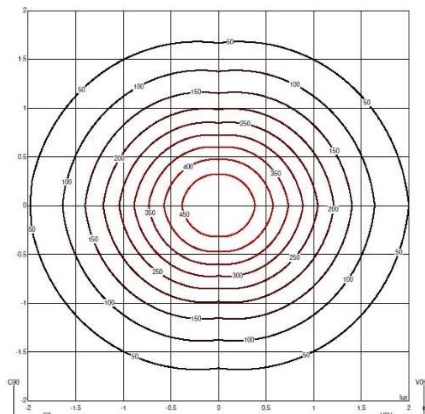
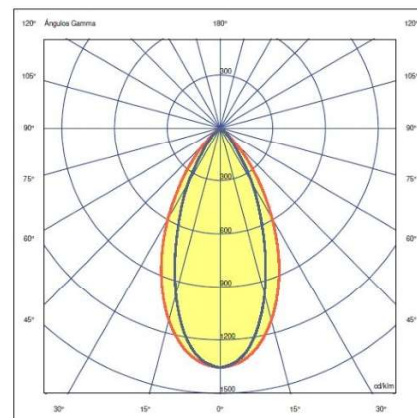


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

The Line ceiling light ensures subtle integration within the surrounding architecture. The homogeneous light quality of the High Comfort diffuser is designed to create a calming, rich and relaxing atmosphere, guaranteeing soft illumination across the entire ceiling surface. Frameless model.

Model Sheet

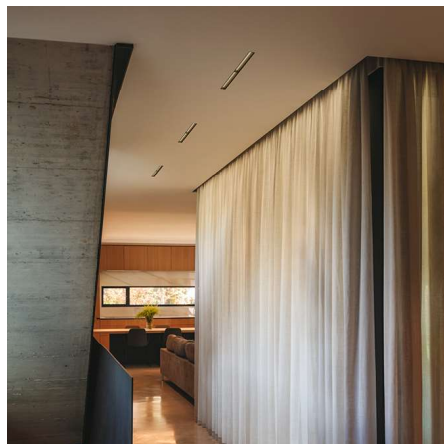

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

NO DRIVER / CASAMBI / DALI / PUSH 1-10V DALI

Optional

DALI or Push or Casambi / NO DRIVER / DALI or Push or Casambi / CASAMBI / DALI or Push or Casambi

Electrical connection Built-in

Light source

1 x LED STRIP 54,8W 650mA



LED

CRI>90 6696 lm 122.63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz

LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
1.09 m x 0.105 m x 0.08 m
Gross weight 3.35 kg
Net weight 2.46 kg
Vol. 0.0091 m³



Lighting effect

Linear High Comfort

Linear lighting applications with High lighting and comfort levels (UGR <19) for illumination in close



Photometric Data

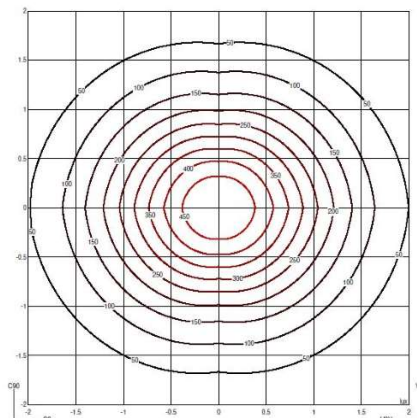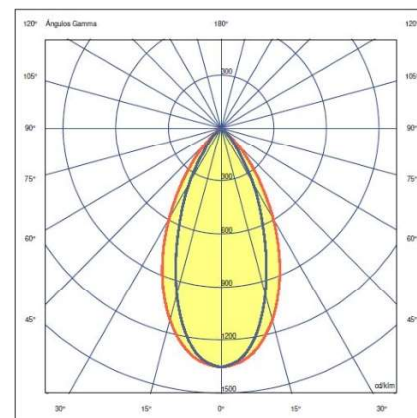

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty