

Line


3530

VIBIA

Design By undefined

The Line model with flat diffuser offers comfortable and uniform lighting that creates pleasant ambiances. Designers are free to experiment with composition, using various lengths to achieve a distinctive linear look. This lighting provides uniform light distribution with soft shadows, subtle highlights, and remarkable visual consistency. Model with frame.

Model Sheet

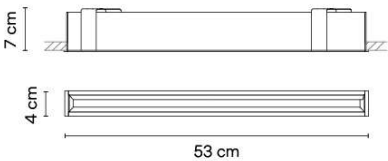


Min. quantity, upcharge and extra lead time apply

Finish	23 Warm White NCS S 0502-Y50R 04 Black NCS S 8500N
LED	2700 K / 3000 K / 3500 K / Tunable White
Control	On/Off / PUSH 1-10V DALI / CASAMBI / NO DRIVER
Optional	DALI or Push or Casambi / On/Off / DALI or Push or Casambi / PUSH 1-10V DALI / DALI or Push or Casambi
Electrical connection	Built-in

Light source	1 x LED STRIP 24V 10,3W E
LED	CRI>90 1272 lm 123 2700 K / 3000 K / 3500 K / Tunable White
Driver	Constant Voltage 220~240 V 50~60 Hz F LED IP20 50-60Hz
Application	Ceiling
Packaging	1 Box 0.57 m x 0.105 m x 0.08 m Gross weight 1.25 kg Net weight 0.78 kg Vol. 0.0047 m3

Lighting effect
Linear
Linear lighting applications for functional and graphic illumination





All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

The Line model with flat diffuser offers comfortable and uniform lighting that creates pleasant ambiances. Designers are free to experiment with composition, using various lengths to achieve a distinctive linear look. This lighting provides uniform light distribution with soft shadows, subtle highlights and remarkable visual consistency. Frameless model.

Model Sheet

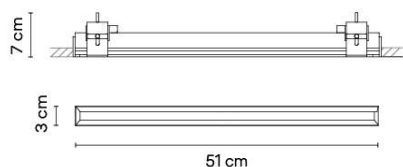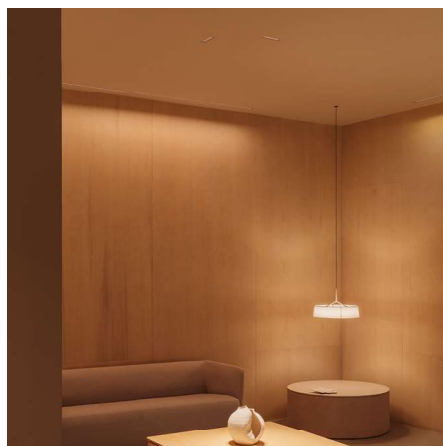

Finish

23 Warm White
NCS S 0502-Y50R

04 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

NO DRIVER / DALI / PUSH 1-10V DALI / CASAMBI

Optional

DALI or Push or Casambi / NO DRIVER / DALI or Push or Casambi / DALI / DALI or Push or Casambi /

Electrical connection Built-in

Light source

1 x LED STRIP 24V 10,3W



LED

CRI>90 1272 lm 123
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Voltage 220~240 V 50~60 Hz



Application


Ceiling

Packaging



Lighting effect

Linear

Linear lighting applications for functional and graphic illumination



Photometric Data

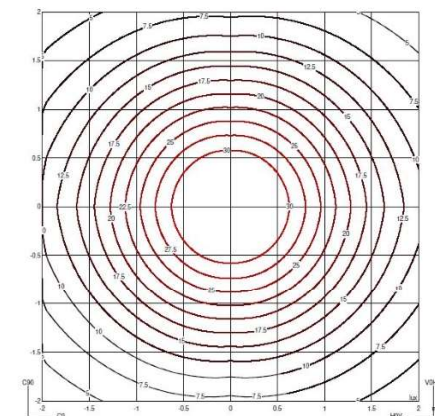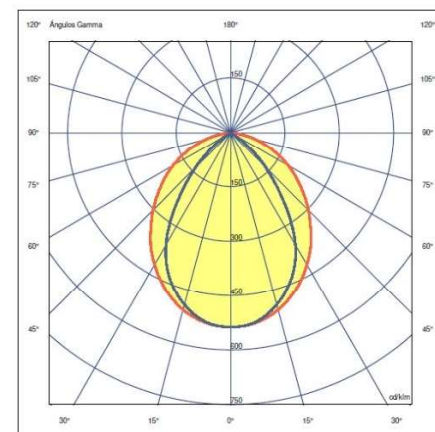

Efficiency
Coordinate System
Total Flux
Maximum Value

39.061 lm/W
CG
402.3 lm
537.86 cd/klm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971

Spain / Portugal T +34 934 796 970


customer.service@vibia.com

vibia.com

Design By undefined

The Line model with flat diffuser offers comfortable and uniform lighting that creates pleasant ambiances. Designers are free to experiment with composition, using various lengths to achieve a distinctive linear look. This lighting provides uniform light distribution with soft shadows, subtle highlights, and remarkable visual consistency. Model with frame.

Model Sheet



Min. quantity, upcharge and extra lead time apply

Finish	04 Black NCS S 8500N 23 Warm White NCS S 0502-Y50R
LED	2700 K / 3000 K / 3500 K / Tunable White
Control	On/Off / CASAMBI / PUSH 1-10V DALI / NO DRIVER
Optional	DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi
Electrical connection	Built-in
Light source	1 x LED STRIP 24V 20,6W E
LED	CRI>90 2544 lm 123 2700 K / 3000 K / 3500 K / Tunable White
Driver	Constant Voltage 220~240 V 50~60 Hz FLEDIP2050-60Hz
Application	Ceiling
Packaging	

Lighting effect

Linear

Linear lighting applications for functional and graphic illumination

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Line


3538

VIBIA

Design By undefined

The Line model with flat diffuser offers comfortable and uniform lighting that creates pleasant ambiances. Designers are free to experiment with composition, using various lengths to achieve a distinctive linear look. This lighting provides uniform light distribution with soft shadows, subtle highlights and remarkable visual consistency. Frameless model.

Model Sheet






Min. quantity, upcharge and extra lead time apply

Finish	23 Warm White NCS S 0502-Y50R 04 Black NCS S 8500N
LED	2700 K / 3000 K / 3500 K / Tunable White
Control	PUSH 1-10V DALI / NO DRIVER / CASAMBI / DALI
Optional	DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi
Electrical connection	Built-in

Light source	1 x LED STRIP 24V 20,6W E
LED	CRI>90 2544 lm 123 2700 K / 3000 K / 3500 K / Tunable White
Driver	Constant Current 430 mA 50~60 Hz F LED IP20 50-60Hz
Application	Ceiling
Packaging	

Lighting effect
Linear
Linear lighting applications for functional and graphic illumination

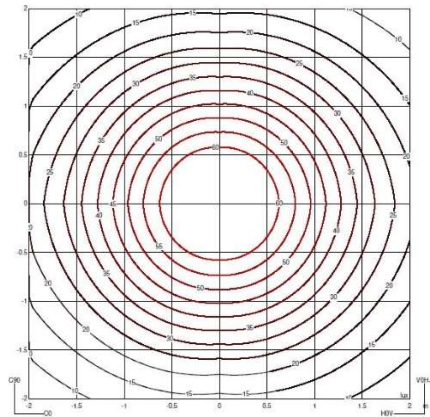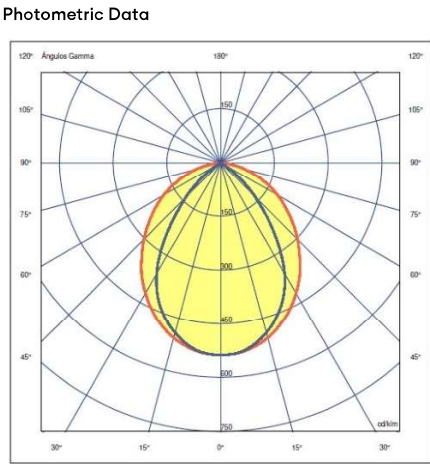

Efficiency	39.061 lm/W
Coordinate System	CG
Total Flux	804.7 lm
Maximum Value	537.86 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Line



3540

VIBIA

Design By undefined

The Line model with flat diffuser offers comfortable and uniform lighting that creates pleasant ambiances. Designers are free to experiment with composition, using various lengths to achieve a distinctive linear look. This lighting provides uniform light distribution with soft shadows, subtle highlights, and remarkable visual consistency. Model with frame.


Model Sheet

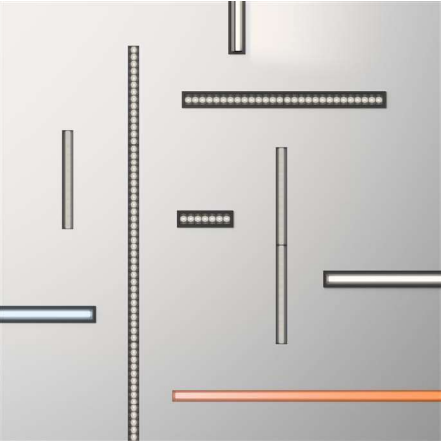

Min. quantity, upcharge and extra lead time apply

Finish	23 Warm White NCS S 0502-Y50R 04 Black NCS S 8500N
LED	2700 K / 3000 K / 3500 K / Tunable White
Control	CASAMBI / On/Off / PUSH 1-10V DALI / NO DRIVER
Optional	DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi
Electrical connection	Built-in
Light source	1 x LED STRIP 24V 41,2W E
LED	CRI>90 5088 lm 123 2700 K / 3000 K / 3500 K / Tunable White
Driver	Constant Voltage 220~240 V 50~60 Hz F LED IP20 50-60Hz
Application	Ceiling
Packaging	

Lighting effect
Linear
Linear lighting applications for functional and graphic illumination



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà, Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Line

3543

VIBIA

Design By undefined

The Line model with flat diffuser offers comfortable and uniform lighting that creates pleasant ambiances. Designers are free to experiment with composition, using various lengths to achieve a distinctive linear look. This lighting provides uniform light distribution with soft shadows, subtle highlights and remarkable visual consistency. Frameless model.


Model Sheet





Finish	23 Warm White NCS S 0502-Y50R 04 Black NCS S 8500N
LED	2700 K / 3000 K / 3500 K / Tunable White
Control	PUSH 1-10V DALI / NO DRIVER / CASAMBI / DALI
Optional	DALI or Push or Casambi / DALI or Push or Casambi / DALI or Push or Casambi
Electrical connection	Built-in

Light source	1 x LED STRIP 24V 41,2W E
LED	CRI>90 5088 lm 123 2700 K / 3000 K / 3500 K / Tunable White
Driver	Constant Voltage 220~240 V 50~60 Hz F LED IP20 50-60Hz
Application	Ceiling
Packaging	


Lighting effect
Linear
Linear lighting applications for functional and graphic illumination



Photometric Data

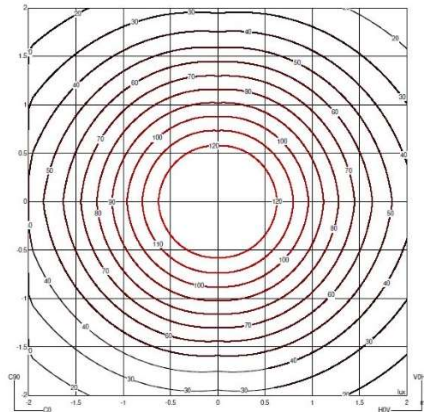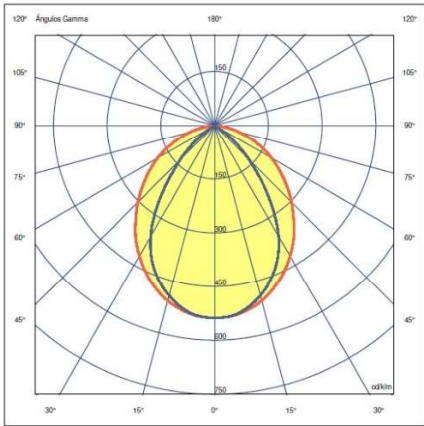

Efficiency	39.061 lm/W
Coordinate System	CG
Total Flux	1609.3 lm
Maximum Value	537.86 cd/klm



Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty