



Design By undefined

Respecting our natural circadian rhythms, the low-glare, high-efficiency Line model eliminates unwanted glare, providing soft, general lighting for a comfortable interior or a subtle transition between different settings. Model with frame.

Model Sheet



Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

CASAMBI / On/Off / PUSH DALI / NO DRIVER

Electrical connection Built-in

Light source

1 x LED STRIP 7,4W 350mA



LED

CRI>90 897 lm 123,9
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz

☐ F LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0033 m3



Lighting effect

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications



Photometric Data

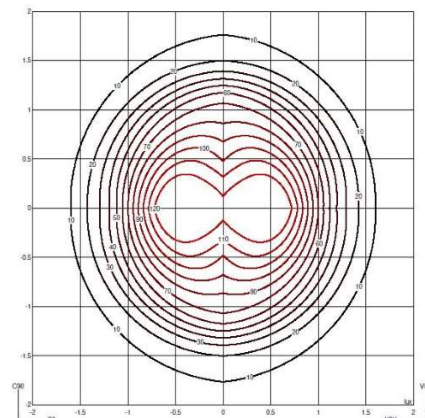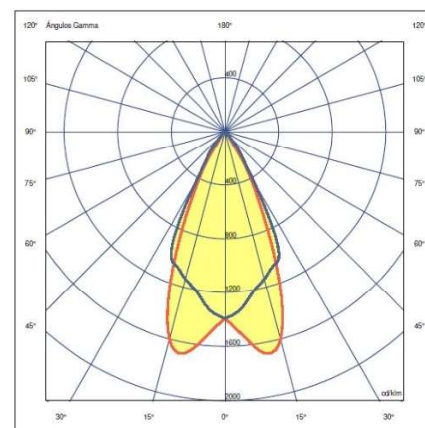


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

Respecting our natural circadian rhythms, the low-glare, high-efficiency Line model eliminates unwanted glare, providing soft, general lighting for a comfortable interior or a subtle transition between different settings. Frameless model.

Model Sheet



Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

On/Off / NO DRIVER / CASAMBI / PUSH DALI

Electrical connection Built-in

Light source

1 x LED STRIP 7,4W 350mA



LED

CRI>90 897 lm 123,9
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz

☐ F LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0033 m3



Lighting effect

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications



Photometric Data

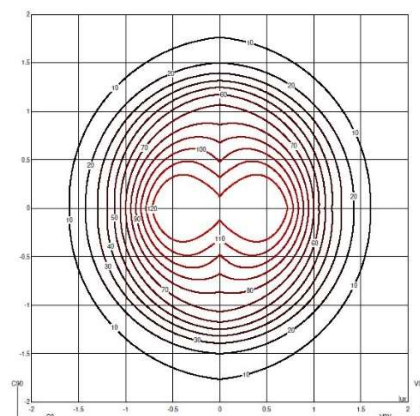
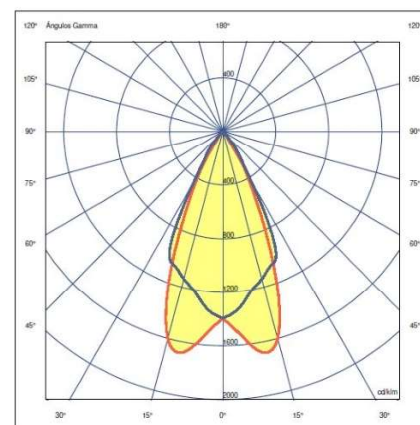


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

Respecting our natural circadian rhythms, the low-glare, high-efficiency Line model eliminates unwanted glare, providing soft, general lighting for a comfortable interior or a subtle transition between different settings. Model with frame.

Model Sheet

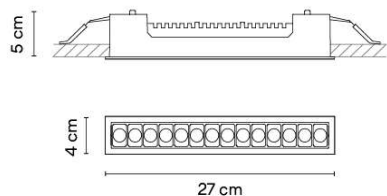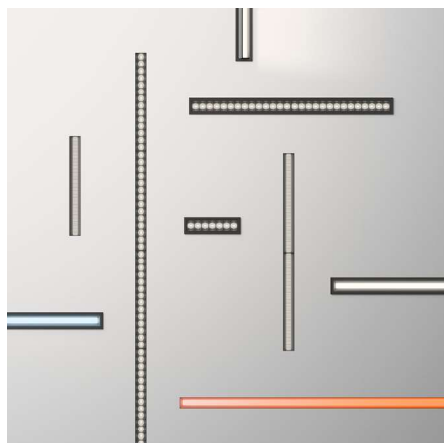

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

PUSH DALI / CASAMBI / On/Off / NO DRIVER

Electrical connection Built-in

Light source

1 x LED STRIP 13,7W 650mA



LED

CRI>90 1674 lm 122,63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz

☐ F LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0033 m3



Lighting effect

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications



Photometric Data

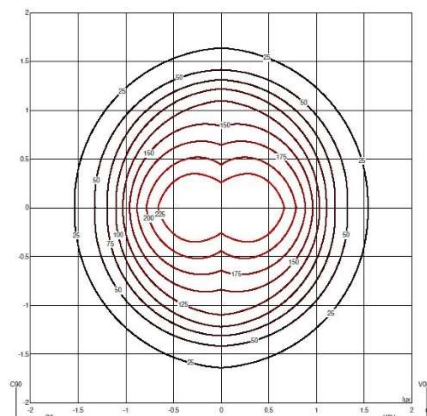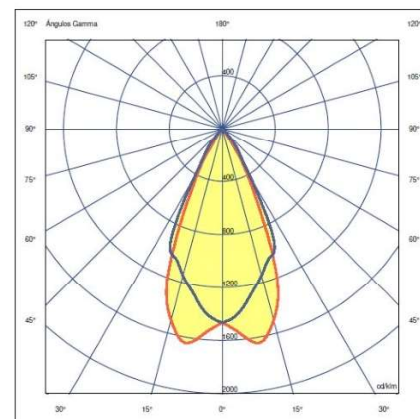


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

Respecting our natural circadian rhythms, the low-glare, high-efficiency Line model eliminates unwanted glare, providing soft, general lighting for a comfortable interior or a subtle transition between different settings. Frameless model.

Model Sheet



Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

NO DRIVER / CASAMBI / PUSH DALI / On/Off

Electrical connection Built-in

Light source

1 x LED STRIP 13,7W 650mA



LED

CRI>90 1674 lm 122,63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz



Application

Ceiling


Packaging

1 Box
0.15 m x 0.3 m x 0.075 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0033 m³



Lighting effect

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications



Photometric Data

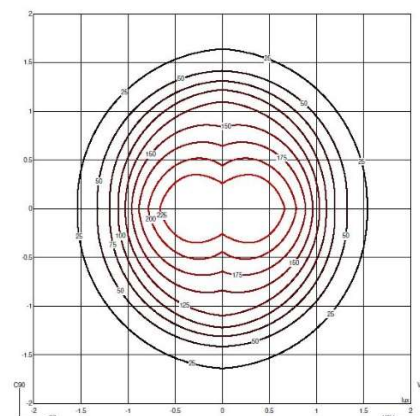
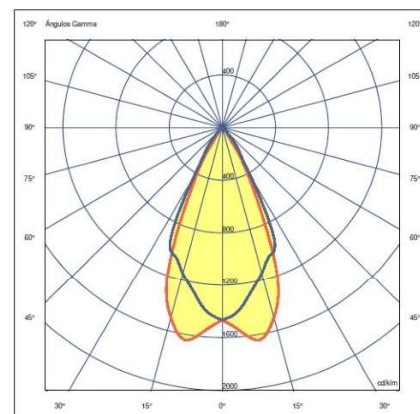


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

Respecting our natural circadian rhythms, the low-glare, high-efficiency Line model eliminates unwanted glare, providing soft, general lighting for a comfortable interior or a subtle transition between different settings. Model with frame.

Model Sheet

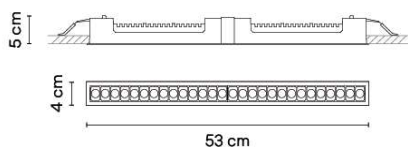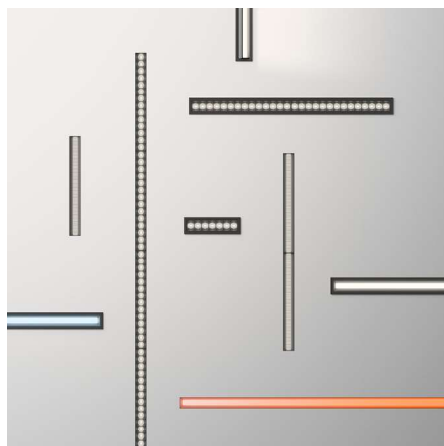

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

PUSH 1-10V DALI / CASAMBI / On/Off / NO DRIVER

Electrical connection Built-in

Light source

1 x LED STRIP 27,4W 650mA



LED

CRI>90 3348 lm 122,63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz

☐ F LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.57 m x 0.105 m x 0.08 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0047 m3



Lighting effect

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications



Photometric Data

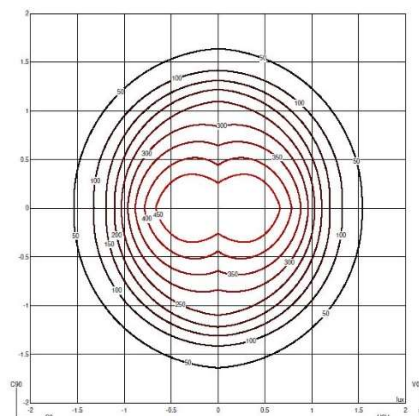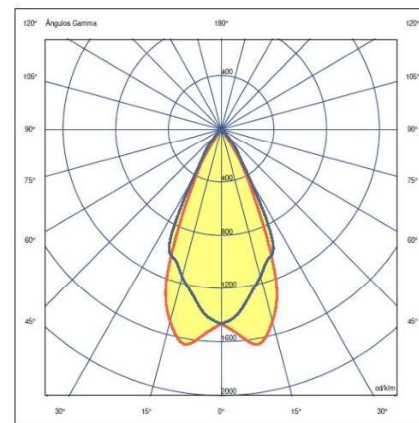


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

Respecting our natural circadian rhythms, the low-glare, high-efficiency Line model eliminates unwanted glare, providing soft, general lighting for a comfortable interior or a subtle transition between different settings. Frameless model.

Model Sheet

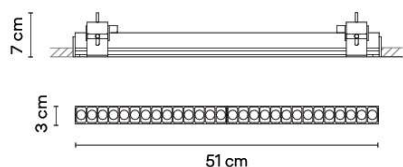

Min. quantity, upcharge and extra lead time apply

Finish

23 Warm White
NCS S 0502-Y50R

04 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

PUSH 1-10V DALI / CASAMBI / On/Off / NO DRIVER

Electrical connection Built-in

Light source

1 x LED STRIP 27,4W 650mA



LED

CRI>90 3348 lm 122,63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz

☐ F LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.57 m x 0.105 m x 0.08 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0047 m3



Lighting effect

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications



Photometric Data

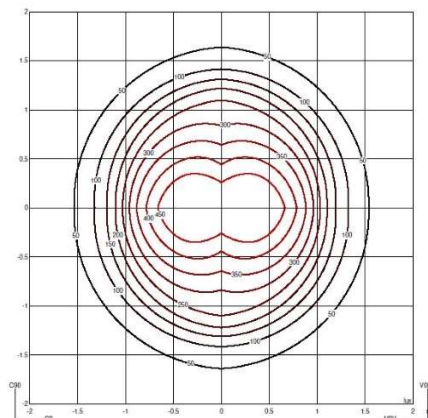
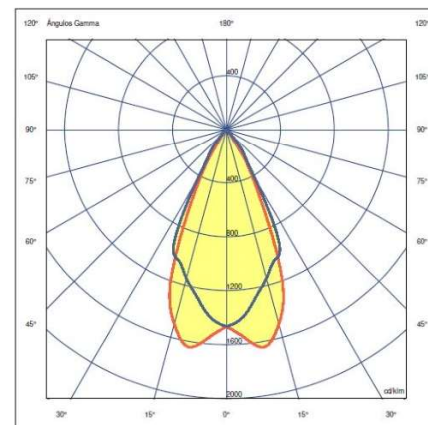


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

Respecting our natural circadian rhythms, the low-glare, high-efficiency Line model eliminates unwanted glare, providing soft, general lighting for a comfortable interior or a subtle transition between different settings. Model with frame.

Model Sheet

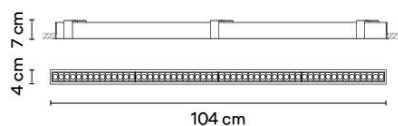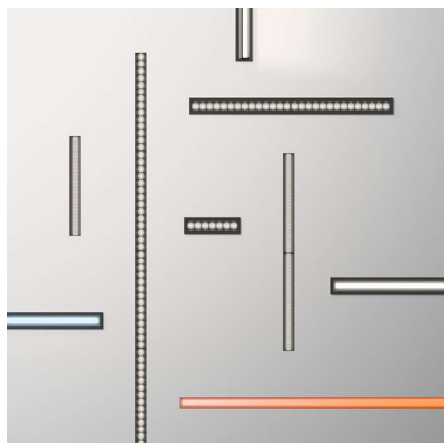

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

PUSH 1-10V DALI / CASAMBI / DALI / NO DRIVER

Electrical connection Built-in

Light source

1 x LED STRIP 54,8W 650mA



LED

CRI>90 6696 lm 122.63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz



Application


Ceiling

Packaging



Lighting effect

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications



Photometric Data

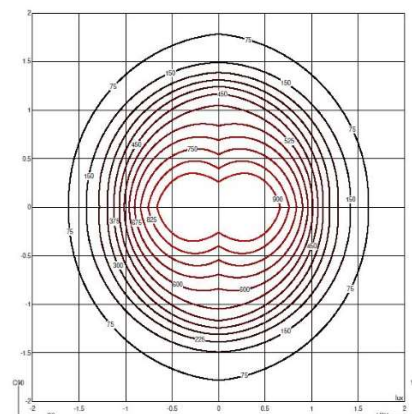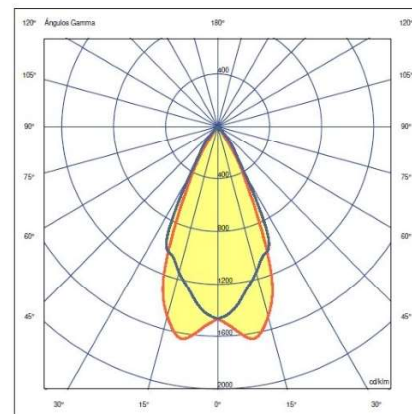


All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Design By undefined

Respecting our natural circadian rhythms, the low-glare, high-efficiency Line model eliminates unwanted glare, providing soft, general lighting for a comfortable interior or a subtle transition between different settings. Frameless model.

Model Sheet

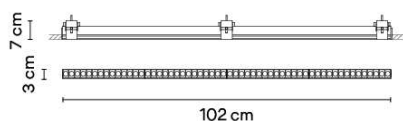

Min. quantity, upcharge and extra lead time apply

Finish

04 Black
NCS S 8500N

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

DALI / PUSH 1-10V DALI / CASAMBI / NO DRIVER

Optional

DALI / PUSH 1-10V DALI / CASAMBI / NO DRIVER

Electrical connection Built-in

Light source

1 x LED STRIP 54,8W 650mA



LED

CRI>90 6696 lm 122.63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz

□ F LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
1.09 m x 0.105 m x 0.08 m
Gross weight 0.01 kg
Net weight 0.01 kg
Vol. 0.0091 m3



Lighting effect

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications



Photometric Data

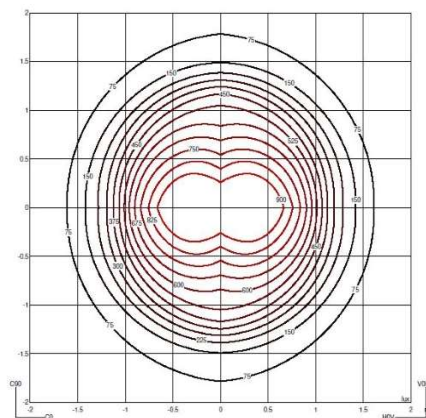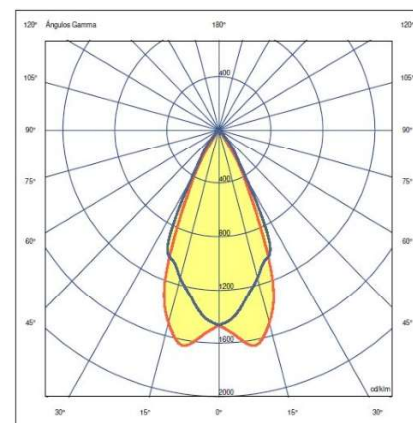

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty