


Mouette Asymmetric - LED 80W - Cable length 1900mm - DALI

Wilmotte & Industries



IP40/20    Dimmerable: 

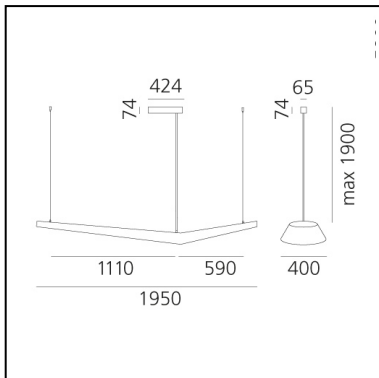

LUMINAIRE

- Power Supply: **Electronic integrated**
- Watt: **85W**
- Voltage: **220V-240V**
- Delivered lumens output: **8186lm**
- CCT: **3000K**
- Efficiency: **82%**
- Efficacy: **96.30lm/W**
- CRI: **80**
- Dimmable Typology: **Dali**

Notes

Height: 1900mm max.

DESCRIPTION

Single pendant with diffused lighting using 24W + 54W T16 fluorescent lamps and LED 80W. Solid opaline diffuser in moulded polypropylene. MOUETTE is available in 2 versions: symmetrical or asymmetrical. Electronic or DSI dimmable electronic ballast depending on the version. The upper part has an opening for easy installation and maintenance. Luminaire comes complete with 1900mm or 5900mm long quick-adjustment steel suspension cables, ceiling plate and power cable. Light sources are included (3000K). Complies with standard EN60598-1 and other specific standards.

PRODUCT CODE: AK00500

FEATURES

- Article Code: **AK00500**
- Colour: **White opaline**
- Installation: **Suspension**
- Material: **Moulded polypropylene, aluminium**
- Series: **Architectural Indoor**
- Area contract: **Hospitality, Retail, Office, Culture**
- design by: **Wilmotte & Industries**

DIMENSIONS

- Length: **cm 195**
- Base Width: **cm 7.4**
- Base Diameter: **cm 42.4**
- Max Height from ceiling: **cm 190**
- Weight: **cm 6.8**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **80W**
- Color temperature (K): **3000K**

Mouette Asymmetric - LED 80W - Cable length 1900mm - Undimmable

Wilmotte & Industries



IP40/20   EAC

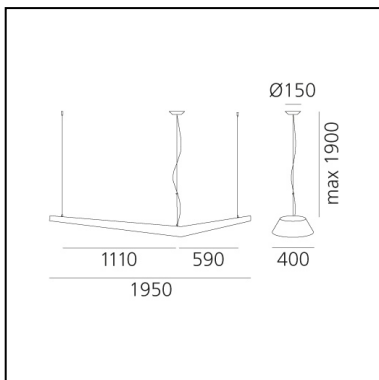

LUMINAIRE

- Power Supply: **Electronic integrated**
- Watt: **85W**
- Voltage: **220V-240V**
- Delivered lumens output: **8186lm**
- CCT: **3000K**
- Efficiency: **82%**
- Efficacy: **96.30lm/W**
- CRI: **80**

Notes

Height: 1900mm max.

DESCRIPTION

Single pendant with diffused lighting using 24W + 54W T16 fluorescent lamps and LED 80W. Solid opaline diffuser in moulded polypropylene. MOUETTE is available in 2 versions: symmetrical or asymmetrical. Electronic or DSI dimmable electronic ballast depending on the version. The upper part has an opening for easy installation and maintenance. Luminaire comes complete with 1900mm or 5900mm long quick-adjustment steel suspension cables, ceiling plate and power cable. Light sources are included (3000K). Complies with standard EN60598-1 and other specific standards.

PRODUCT CODE: AK00600

FEATURES

- Article Code: **AK00600**
- Colour: **White opaline**
- Installation: **Suspension**
- Material: **Moulded polypropylene, aluminium**
- Series: **Architectural Indoor**
- Area contract: **Hospitality, Retail, Office, Culture**
- design by: **Wilmotte & Industries**

DIMENSIONS

- Length: **cm 195**
- Max Height from ceiling: **cm 190**
- Weight: **cm 6.8**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **80W**
- Color temperature (K): **3000K**

Mouette Asymmetric - LED 80W - Cable length 5900mm - DALI

Wilmotte & Industries



IP40/20   **EAC** Dimmerable: 

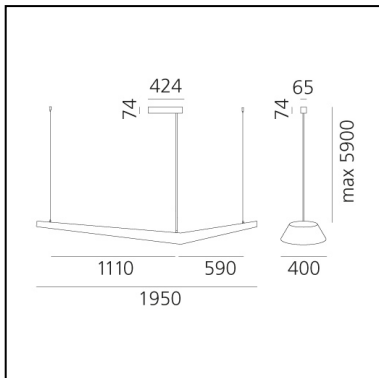

LUMINAIRE

- Power Supply: **Electronic integrated**
- Watt: **85W**
- Voltage: **220V-240V**
- Delivered lumens output: **8186lm**
- CCT: **3000K**
- Efficiency: **82%**
- Efficacy: **96.30lm/W**
- CRI: **80**
- Dimmable Typology: **Dali**

Notes

Height: 1900mm max.

DESCRIPTION

Single pendant with diffused lighting using 24W + 54W T16 fluorescent lamps and LED 80W. Solid opaline diffuser in moulded polypropylene. MOUETTE is available in 2 versions: symmetrical or asymmetrical. Electronic or DSI dimmable electronic ballast depending on the version. The upper part has an opening for easy installation and maintenance. Luminaire comes complete with 1900mm or 5900mm long quick-adjustment steel suspension cables, ceiling plate and power cable. Light sources are included (3000K). Complies with standard EN60598-1 and other specific standards.

PRODUCT CODE: AK10500

FEATURES

- Article Code: **AK10500**
- Colour: **White opaline**
- Installation: **Suspension**
- Material: **Moulded polypropylene, aluminium**
- Series: **Architectural Indoor**
- Area contract: **Hospitality, Retail, Office, Culture**
- design by: **Wilmotte & Industries**

DIMENSIONS

- Length: **cm 195**
- Base Width: **cm 7.4**
- Base Diameter: **cm 42.4**
- Max Height from ceiling: **cm 590**
- Weight: **cm 6.9**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **80W**
- Color temperature (K): **3000K**

Mouette Asymmetric - LED 80W - Cable length 5900mm - Undimmable

Wilmotte & Industries



IP40/20   EAC

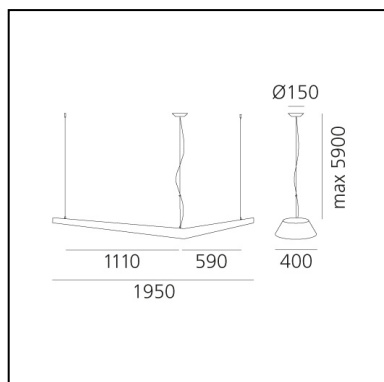

LUMINAIRE

- Power Supply: **Electronic integrated**
- Watt: **85W**
- Voltage: **220V-240V**
- Delivered lumens output: **8186lm**
- CCT: **3000K**
- Efficiency: **82%**
- Efficacy: **96.30lm/W**
- CRI: **80**

Notes

Height: 1900mm max.

DESCRIPTION

Single pendant with diffused lighting using 24W + 54W T16 fluorescent lamps and LED 80W. Solid opaline diffuser in moulded polypropylene. MOUETTE is available in 2 versions: symmetrical or asymmetrical. Electronic or DSI dimmable electronic ballast depending on the version. The upper part has an opening for easy installation and maintenance. Luminaire comes complete with 1900mm or 5900mm long quick-adjustment steel suspension cables, ceiling plate and power cable. Light sources are included (3000K). Complies with standard EN60598-1 and other specific standards.

PRODUCT CODE: AK10600

FEATURES

- Article Code: **AK10600**
- Colour: **White opaline**
- Installation: **Suspension**
- Material: **Moulded polypropylene, aluminium**
- Series: **Architectural Indoor**
- Area contract: **Hospitality, Retail, Office, Culture**
- design by: **Wilmotte & Industries**

DIMENSIONS

- Length: **cm 195**
- Max Height from ceiling: **cm 590**
- Weight: **cm 6.9**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **80W**
- Color temperature (K): **3000K**