


Mouette Symmetric - LED 55W - Cable length 1900mm - DALI

Wilmotte & Industries



IP40/20    Dimmerable:  +  -

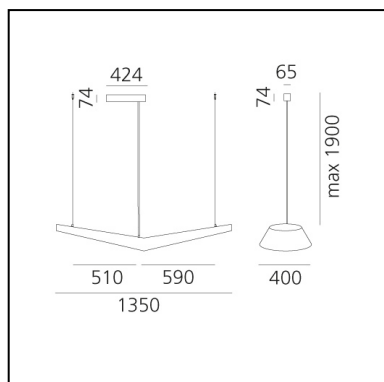

LUMINAIRE

- Power Supply: **Electronic Integrated**
- Watt: **68W**
- Voltage: **220V-240V**
- Delivered lumens output: **6107lm**
- CCT: **3000K**
- Efficiency: **80%**
- Efficacy: **89.81lm/W**
- CRI: **80**
- Dimmable Typology: **Dali**

Notes

Height: 1900mm max.

DESCRIPTION

Single pendant with diffused lighting using 4x24W T16 fluorescent lamps and 55 W LED. Solid opaline diffuser in moulded polypropylene. The upper part has an opening for easy installation and maintainance. Luminaire comes complete with 1900mm or 5900mm long quick-adjustment steel suspension cables, ceiling plate and power cable. All the light sources are included (3000K).

PRODUCT CODE: AK00100

FEATURES

- Article Code: **AK00100**
- Colour: **White opaline**
- Installation: **Suspension**
- Material: **Moulded polypropylene, aluminium**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail**
- Emission: **Dual Emission Diffused**
- design by: **Wilmotte & Industries**

DIMENSIONS

- Length: **cm 135**
- Base Width: **cm 7.4**
- Base Diameter: **cm 42.4**
- Max Height from ceiling: **cm 190**
- Weight: **cm 5.4**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **55W**
- Color temperature (K): **3000K**

Mouette Symmetric - LED 55W - Cable length 1900mm - Undimmable

Wilmotte & Industries



IP40/20   

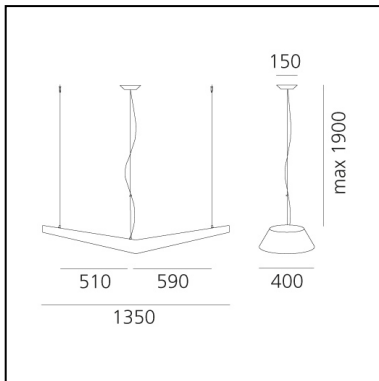

LUMINAIRE

- Power Supply: **Electronic Integrated**
- Watt: **68W**
- Voltage: **220V-240V**
- Delivered lumens output: **6107lm**
- CCT: **3000K**
- Efficiency: **80%**
- Efficacy: **89.81lm/W**
- CRI: **80**

Notes

Height: 1900mm max.

DESCRIPTION

Single pendant with diffused lighting using 4x24W T16 fluorescent lamps and 55 W LED. Solid opaline diffuser in moulded polypropylene. The upper part has an opening for easy installation and maintainance. Luminaire comes complete with 1900mm or 5900mm long quick-adjustment steel suspension cables, ceiling plate and power cable. All the light sources are included (3000K).

PRODUCT CODE: AK00200

FEATURES

- Article Code: **AK00200**
- Colour: **White opaline**
- Installation: **Suspension**
- Material: **Moulded polypropylene, aluminium**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail**
- Emission: **Dual Emission Diffused**
- design by: **Wilmotte & Industries**

DIMENSIONS

- Length: **cm 135**
- Max Height from ceiling: **cm 190**
- Weight: **cm 5.4**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **55W**
- Color temperature (K): **3000K**

Mouette Symmetric - LED 55W - Cable length 5900mm - DALI

Wilmotte & Industries



IP40/20    Dimmerable: +  -

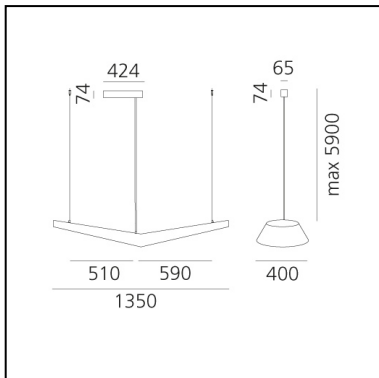

LUMINAIRE

- Power Supply: **Electronic Integrated**
- Watt: **68W**
- Voltage: **220V-240V**
- Delivered lumens output: **6107lm**
- CCT: **3000K**
- Efficiency: **80%**
- Efficacy: **89.81lm/W**
- CRI: **80**
- Dimmable Typology: **Dali**

DESCRIPTION

Single pendant with diffused lighting using 4x24W T16 fluorescent lamps and 55 W LED. Solid opaline diffuser in moulded polypropylene. The upper part has an opening for easy installation and maintainance. Luminaire comes complete with 1900mm or 5900mm long quick-adjustment steel suspension cables, ceiling plate and power cable. All the light sources are included (3000K).

PRODUCT CODE: AK10100

FEATURES

- Article Code: **AK10100**
- Colour: **White opaline**
- Installation: **Suspension**
- Material: **Moulded polypropylene, aluminium**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail**
- Emission: **Dual Emission Diffused**
- design by: **Wilmotte & Industries**

DIMENSIONS

- Length: **cm 135**
- Base Width: **cm 7.4**
- Base Diameter: **cm 42.4**
- Max Height from ceiling: **cm 590**
- Weight: **cm 5.5**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **55W**
- Color temperature (K): **3000K**

Mouette Symmetric - LED 55W - Cable length 5900mm - Undimmable

Wilmotte & Industries



IP40/20   

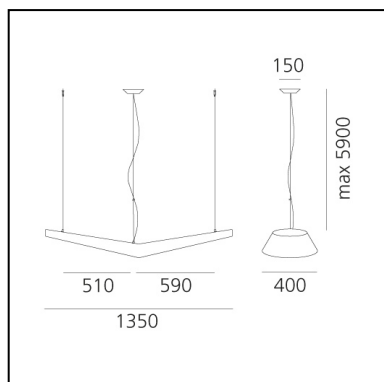

LUMINAIRE

- Power Supply: **Electronic Integrated**
- Watt: **68W**
- Voltage: **220V-240V**
- Delivered lumens output: **6107lm**
- CCT: **3000K**
- Efficiency: **80%**
- Efficacy: **89.81lm/W**
- CRI: **80**

DESCRIPTION

Single pendant with diffused lighting using 4x24W T16 fluorescent lamps and 55 W LED. Solid opaline diffuser in moulded polypropylene. The upper part has an opening for easy installation and maintainance. Luminaire comes complete with 1900mm or 5900mm long quick-adjustment steel suspension cables, ceiling plate and power cable. All the light sources are included (3000K).

PRODUCT CODE: AK10200

FEATURES

- Article Code: **AK10200**
- Colour: **White opaline**
- Installation: **Suspension**
- Material: **Moulded polypropylene, aluminium**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- Area contract: **Hospitality, null, Retail**
- Emission: **Dual Emission Diffused**
- design by: **Wilmotte & Industries**

DIMENSIONS

- Length: **cm 135**
- Max Height from ceiling: **cm 590**
- Weight: **cm 5.5**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **55W**
- Color temperature (K): **3000K**