



Noctambule Floor 1 High Cylinder Cone Small Base

■ F0265000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.

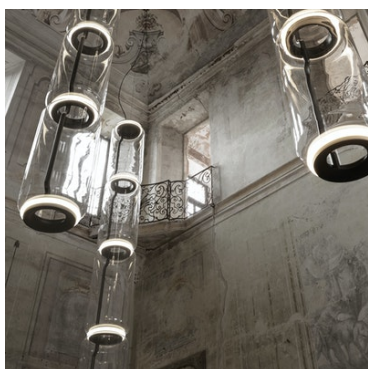

Main specifications

Mounting Environment	Floor Indoor dry location	Lamp holder	LED Module, COB LED
Light source type	LED	Dimmable	Yes
Light source replaceable	Replaceable (LED only) light source by a professional	Autoprotected Lamp	No
	LED Module	Number of heads	3
	876	Source Power (W)	36

Optical

Lighting Type	Total
Lighting distribution	Sym metric
CCT (K)	2700
CRI>	90
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer Integrated
Driver	Remote included	Power supply replaceable	Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C
Charging Min Time	No		

Physical

Colour	Black
Net weight (kg)	14
Gross weight (kg)	30.87
IP	20
IP external	20



Noctambule Floor 1 High Cylinder Small Base

■ F0285000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.



Main specifications

Mounting	Floor	Lamp holder	LED Module
Environment	Indoor dry location	Dimmable	Yes
Light source type	LED	Autoprotected Lamp	No
Light source replaceable	Replaceable (LED only) light source by a professional	Number of heads	2
	LED Module 497	Source Power (W)	18
LED type			
System Flux (lm)			

Optical

Lighting Type	Total
Lighting distribution	Sym metric
CCT (K)	2700
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer
Driver	Remote included	Power supply replaceable	Integrated Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C

Charging Min Time	No
--------------------------	----

Physical


Colour	Black
Net weight (kg)	10.8
Gross weight (kg)	23.81
IP	20
IP external	20

Noctambule Floor 1 Low Cylinder Small Base

■ F0288000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.



Main specifications

Mounting Environment	Floor Indoor dry location	Lamp holder	LED Module
Light source type	LED	Dimmable	Yes
Light source replaceable	Replaceable (LED only) light source by a professional	Autoprotected Lamp	No
	LED Module	Source Power (W)	18
		System Flux (lm)	485

Optical

Lighting Type	Total
Lighting distribution	Symmetric
CCT (K)	2700
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer
Driver	Remote included	Power supply replaceable	Integrated
Dimmable	Yes		Replaceable control gear by an end-user
		Plug Type	Type G, Type A, Type C
Charging Min Time	No		

Physical



Colour	Black
Net weight (kg)	10.3
Gross weight (kg)	22.71
IP	20
IP external	20

Noctambule Floor 2 High Cylinder Cone Small Base

■ F0269000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.

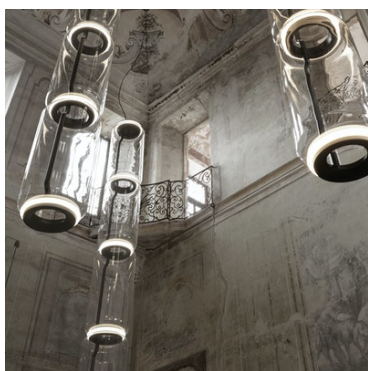

Main specifications

Mounting Environment	Floor Indoor dry location	Lamp holder	LED Module, COB LED
Light source type	LED	Dimmable	Yes
Light source replaceable	Replaceable (LED only) light source by a professional	Autoprotected Lamp	No
	LED Module	Number of heads	4
LED type	1174	Source Power (W)	45
System Flux (lm)			

Optical

Lighting Type	Total
Lighting distribution	Sym metric
CCT (K)	2700
CRI>	90
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Remote Dimmable (Dimmer Not Included)
Driver	Remote included	Power supply replaceable	Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C
Charging Min Time	No		

Physical

Colour	Black
Net weight (kg)	18
Gross weight (kg)	39.69
IP	20
IP external	20




Noctambule Floor 2 High Cylinder Small Base

■ F0286000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.



Main specifications

Mounting Environment	Floor Indoor dry location	Lamp holder	LED Module
Light source type	LED	Dimmable	Yes
Light source replaceable	Replaceable (LED only) light source by a professional	Autoprotected Lamp	No
LED type	LED Module	Number of heads	3
System Flux (lm)	795	Source Power (W)	27

Optical

Lighting Type	Total
Lighting distribution	Sym metric
CCT (K)	2700
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer
Driver	Remote included	Power supply replaceable	Integrated Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C
Charging Min Time	No		

Physical

Colour	Black
Net weight (kg)	14.8
Gross weight (kg)	32.63
IP	20
IP external	20





Noctambule Floor 2 Low Cylinder Small Base

■ F0289000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.

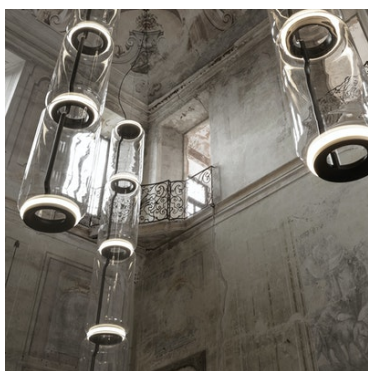

Main specifications

Mounting Environment	Floor Indoor dry location	Lamp holder Dimmable	LED Module Yes
Light source type	LED	Autoprotected Lamp	No
Light source replaceable	Replaceable (LED only) light source by a professional	Source Power (W)	27
	LED Module	System Flux (lm)	771
LED type			

Optical

Lighting Type	Total
Lighting distribution	Symmetric
CCT (K)	2700
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer Integrated
Driver	Remote included	Power supply replaceable	Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C
Charging Min Time	No		

Physical



Colour	Black
Net weight (kg)	13.8
Gross weight (kg)	30.43
IP	20
IP external	20

Noctambule Floor 3 High Cylinder Bowl Big Base

■ F0266000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.

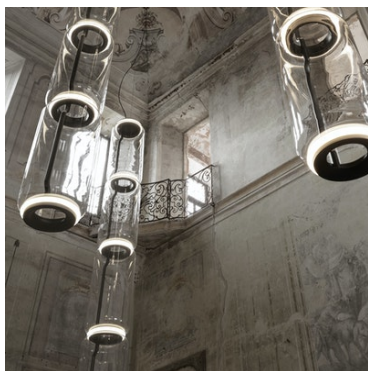

Main specifications

Mounting Environment	Floor Indoor dry location	Lamp holder	LED Module, COB LED
Light source type	LED	Dimmable	Yes
Light source replaceable	Replaceable (LED only) light source by a professional LED Module	Autoprotected Lamp	No
LED type	LED Module	Number of heads	5
System Flux (lm)	1493	Source Power (W)	54

Optical

Lighting Type	Total
Lighting distribution	Sym metric
CCT (K)	2700
CRI>	90
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer Integrated
Driver	Remote included	Power supply replaceable	Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C
Charging Min Time	No		

Physical


Colour	Black
Net weight (kg)	27
Gross weight (kg)	59.54
IP	20
IP external	20

Noctambule Floor 3 High Cylinder Cone Big Base

■ F0267000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.



Main specifications

Mounting Environment	Floor Indoor dry location	Lamp holder	LED Module, COB LED
Light source type	LED	Dimmable	Yes
Light source replaceable	Replaceable (LED only) light source by a professional	Autoprotected Lamp	No
LED type	LED Module	Number of heads	5
System Flux (lm)	1459	Source Power (W)	54

Optical

Lighting Type	Total
Lighting distribution	Sym metric
CCT (K)	2700
CRI>	90
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer
Driver	Remote included	Power supply replaceable	Integrated Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C
Charging Min Time	No		

Physical


Colour	Black
Net weight (kg)	26.5
Gross weight (kg)	58.43
IP	20
IP external	20

Noctambule Floor 3 High Cylinder Small Base

■ F0287000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.



Main specifications

Mounting	Floor	Lamp holder	LED Module
Environment	Indoor dry location	Dimmable	Yes
Light source type	LED	Autoprotected Lamp	No
Light source replaceable	Replaceable (LED only) light source by a professional	Source Power (W)	36
	LED Module	System Flux (lm)	1093

Optical

Lighting Type	Total
Lighting distribution	Symmetric
CCT (K)	2700
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer
Driver	Remote included	Power supply replaceable	Integrated
Dimmable	Yes		Replaceable control gear by an end-user
Plug Type	Type G, Type A, Type C	Cord length (mm)	4000
Charging Min Time	No		

Physical

Colour	Black
Net weight (kg)	18.8
Gross weight (kg)	41.45
IP	20
IP external	20




Noctambule Floor 3 Low Cylinder Small Base

■ F0290000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.



Main specifications

Mounting	Floor	Lamp holder	LED Module
Environment	Indoor dry location	Dimmable	Yes
Light source type	LED	Autoprotected Lamp	No
Light source replaceable	Replaceable (LED only) light source by a professional	Number of heads	4
	LED Module 1057	Source Power (W)	36

Optical

Lighting Type	Total
Lighting distribution	Sym metric
CCT (K)	2700
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer
Driver	Remote included	Power supply replaceable	Integrated Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C
Charging Min Time	No		

Physical

Colour	Black
Net weight (kg)	17.3
Gross weight (kg)	38.15
IP	20
IP external	20




Noctambule Floor 4 High Cylinder Big Base

■ F0292000 - Black

Designed by Konstantin Grcic

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.



Main specifications

Mounting	Floor	Lamp holder	LED Module
Environment	Indoor dry location	Dimmable	Yes
Light source type	LED	Autoprotected Lamp	No
Light source replaceable	Replaceable (LED only) light source by a professional	Number of heads	5
	LED Module	Source Power (W)	45
LED type	1378		
System Flux (lm)			

Optical

Lighting Type	Total
Lighting distribution	Sym metric
CCT (K)	2700
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer
Driver	Remote included	Power supply replaceable	Integrated Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C
Charging Min Time	No		


Physical

Colour	Black
Net weight (kg)	27.3
Gross weight (kg)	60.2
IP	20
IP external	20

Noctambule Floor 4 Low Cylinder Small Base

■ F0291000 - Black

Designed by Konstantin Grcic



Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.

Main specifications

Mounting	Floor	Lamp holder	LED Module
Environment	Indoor dry location	Dimmable	Yes
Light source type	LED	Autoprotected Lamp	No
Light source replaceable	Replaceable (LED only) light source by a professional	Source Power (W)	45
	LED Module	System Flux (lm)	1343

Optical

Lighting Type	Total
Lighting distribution	Symmetric
CCT (K)	2700
Cold Beam Lighting	No
Extreme Cut off	No

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	No
Main Voltage (Vac)	100-240/48	Dimming Interface	Dimmer
Driver	Remote included	Power supply replaceable	Integrated
Dimmable	Yes	Plug Type	Replaceable control gear by an end-user
			Type G, Type A, Type C
Charging Min Time	No		

Physical

Colour	Black
Net weight (kg)	20.8
Gross weight (kg)	45.86
IP	20
IP external	20

