

General info

DECORATIVO - Ceiling


Indoor ceiling mounted lamp with integrated LED sources and direct light emission



Ean	8021696265971
Item	ORACLE SLIM PL D050 ROUND 3000K ON-OFF WH
Installation	Ceiling
Guarantee	5 years
Gross weight	2.32 kg
Volume	0.045486 m³

Technical info

Net weight	1.24 kg
Insulation class	II
Protection index	IP20
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included YES (by qualified operators only), electronic



Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	LED 32W
Emission	Direct
Max consumption	max 32 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	3150 lm
Useful light flux	1870 lm
Standby power	< 0.50

General info

DECORATIVO - Ceiling


Indoor ceiling mounted lamp with integrated LED sources and direct light emission



Ean	8021696265995
Item	ORACLE SLIM PL D070 ROUND 3000K ON-OFF WH
Installation	Ceiling
Guarantee	5 years
Gross weight	3.4 kg
Volume	0.085176 m³

Technical info

Net weight	1.43 kg
Insulation class	II
Protection index	IP20
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included YES (by qualified operators only), electronic




Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	LED 38W
Emission	Direct
Max consumption	max 38 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	4300 lm
Useful light flux	2520 lm
Standby power	< 0.50

General info

DECORATIVO - Ceiling


Indoor ceiling mounted lamp with integrated LED sources and direct light emission

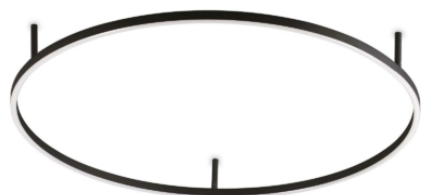

Ean	8021696266022
Item	ORACLE SLIM PL D090 ROUND 3000K ON-OFF BK
Installation	Ceiling
Guarantee	5 years
Gross weight	4.8 kg
Volume	0.134456 m³

Technical info

Net weight	1.7 kg
Insulation class	II
Protection index	IP20
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included YES (by qualified operators only), electronic



Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	LED 55W
Emission	Direct
Max consumption	max 55 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	5300 lm
Useful light flux	2740 lm
Standby power	< 0.50

ideal lux®

IDEAL LUX s.r.l.
Via Taglio Destro 32
30035 Mirano (VE) Italy
www.ideal-lux.com

IDEAL LUX Warehouse
Via delle Industrie, 8/D
30036 Santa Maria di Sala (Venezia)
8.00 - 12.00 / 13.30 - 17.00

ideal lux®



REV 26/07/2022



Oracle Slim PL D050



Lampada da soffitto
Ceiling lamp
Plafonnier
Deckenleuchte
Lámpara de techo
Потолочные светильники


LED

32W LED / 220~240V 50/60Hz
- 8021696265971 BIANCO
- 8021696265988 NERO

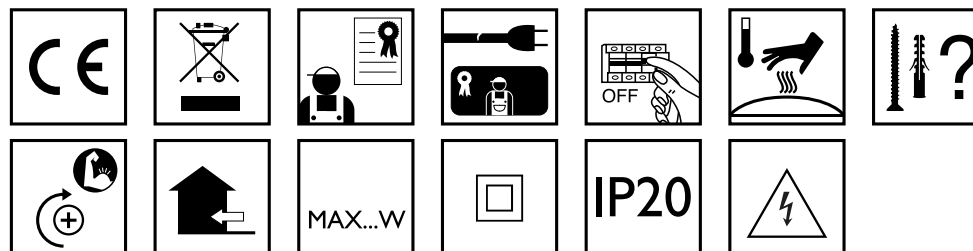


IDEAL LUX s.r.l.
Via Taglio Destro 32
30035 Mirano (VE) Italy
www.ideal-lux.com


IDEAL LUX Warehouse
Via delle Industrie, 8/D
30036 Santa Maria di Sala (Venezia)
8.00 - 12.00 / 13.30 - 17.00




①

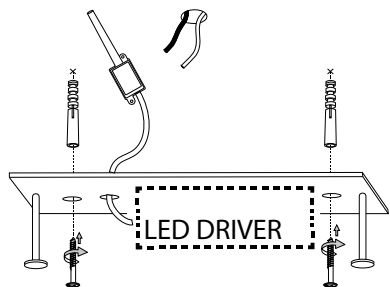


②

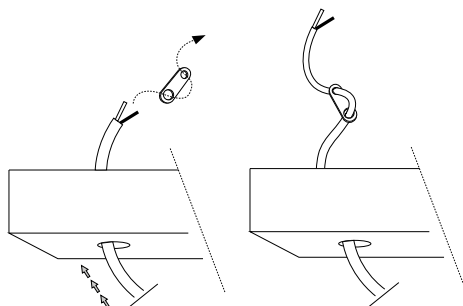


③

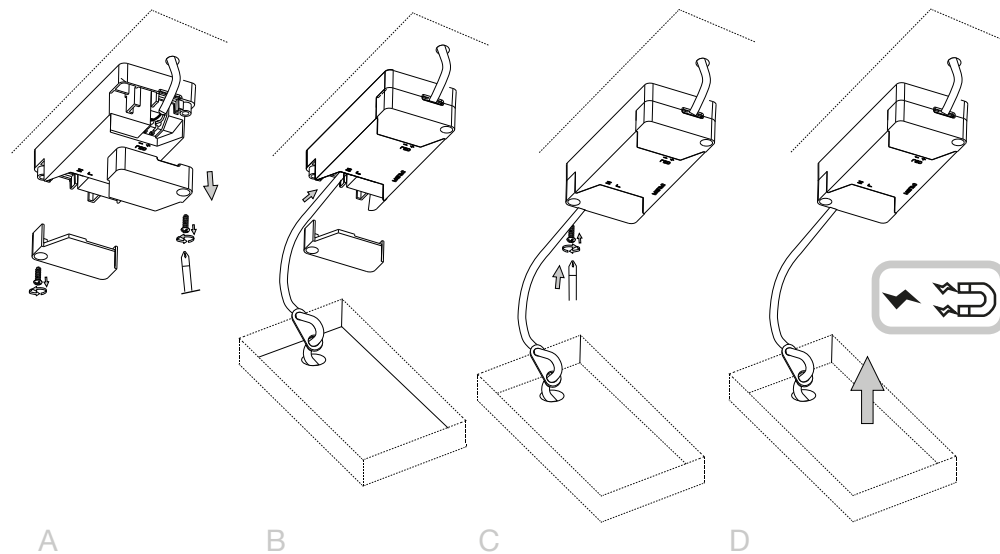

④

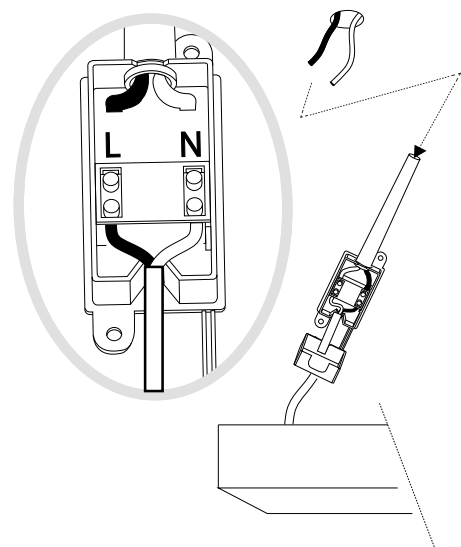

⑤

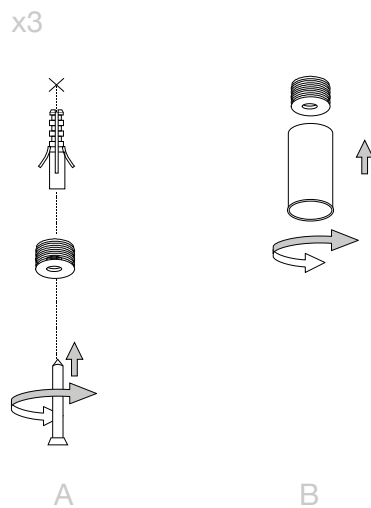

⑤

