

ROUND CRI > 80




Power	Angle	Flux	CCT	Color	cod.
32W	115°	3150	3000 K	○ White	229461
32W	115°	3150	3000 K	● Black	229492
32W	115°	3350	4000 K	○ White	269856
38W	115°	4300	3000 K	○ White	229485
38W	115°	4300	3000 K	● Black	229515
38W	115°	4500	4000 K	○ White	269863
55W	115°	5400	3000 K	○ White	229478
55W	115°	5400	3000 K	● Black	229508
55W	115°	5700	4000 K	○ White	269870

SQUARE CRI > 80



Power	Angle	Flux	CCT	Color	cod.
33W	115°	3300	3000 K	○ White	259154
33W	115°	3300	3000 K	● Black	259161
41W	115°	4350	3000 K	○ White	259178
41W	115°	4350	3000 K	● Black	259185
53W	115°	5250	3000 K	○ White	259192
53W	115°	5250	3000 K	● Black	259208



General info

DECORATIVO - Hanging

Indoor suspended lamp with integrated LED sources and direct light emission


Ean	8021696229492
Item	ORACLE SLIM SP D050 ROUND 3000K ON-OFF BK
Installation	Suspension
Guarantee	5 years
Gross weight	2.89 kg
Volume	0.037632 m ³

Technical info

Net weight	1.4 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	No dimmerable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included
Front protection index	YES (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	30W
Emission	Direct
Max consumption	max 30 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	3050 lm
Useful light flux	1810 lm
Standby power	< 0.50



General info

DECORATIVO - Hanging

Indoor suspended lamp with integrated LED sources and direct light emission


Ean	8021696229515
Item	ORACLE SLIM SP D070 ROUND 3000K ON-OFF BK
Installation	Suspension
Guarantee	5 years
Gross weight	3.5 kg
Volume	0.080864 m ³

Technical info

Net weight	1.66 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	No dimmerable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included
Front protection index	YES (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	36W
Emission	Direct
Max consumption	max 36 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	4250 lm
Useful light flux	2170 lm
Standby power	< 0.50



General info

DECORATIVO - Hanging

Indoor suspended lamp with integrated LED sources and direct light emission

Ean	8021696229508
Item	ORACLE SLIM SP D090 ROUND 3000K ON-OFF BK
Installation	Suspension
Guarantee	5 years
Gross weight	5.1 kg
Volume	0.221184 m ³

Technical info

Net weight	1.8 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	No dimmerable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included
Front protection index	YES (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	55W
Emission	Direct
Max consumption	max 55 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	5250 lm
Useful light flux	3080 lm
Standby power	< 0.50

General info


DECORATIVO - Hanging

Indoor suspended lamp with integrated LED sources and direct light emission

Ean	8021696285061
Item	ORACLE SLIM SP D150 ROUND 3000K ON-OFF BK
Installation	Suspension
Guarantee	5 years
Gross weight	7.91 kg
Volume	0.4096 m ³


Technical info

Net weight	2.48 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	No dimmerable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included
	YES (by qualified operators only), electronic

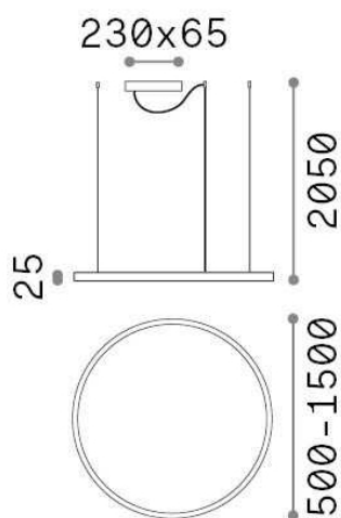

Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	LED 87W
Emission	Direct
Max consumption	max 87 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	8350 lm
Useful light flux	4820 lm
Standby power	< 0.50



General info

DECORATIVO - Hanging

Indoor suspended lamp with integrated LED sources and direct light emission


Ean	8021696259154
Item	ORACLE SLIM SP D050 SQUARE 3000K ON-OFF WH
Installation	Suspension
Guarantee	5 years
Gross weight	2.74 kg
Volume	0.042237 m ³

Technical info

Net weight	1.73 kg
Insulation class	II
Protection index	IP20
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included YES (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	33W
Emission	Direct
Max consupcion	max 33 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	3300 lm
Useful light flux	1960 lm
Standby power	< 0.50



General info

DECORATIVO - Hanging

Indoor suspended lamp with integrated LED sources and direct light emission


Ean	8021696259178
Item	ORACLE SLIM SP D070 SQUARE 3000K ON-OFF WH
Installation	Suspension
Guarantee	5 years
Gross weight	3.75 kg
Volume	0.081928 m ³

Technical info

Net weight	2 kg
Insulation class	II
Protection index	IP20
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included YES (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	41W
Emission	Direct
Max consupcion	max 41 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	4350 lm
Useful light flux	2590 lm
Standby power	< 0.50



General info

DECORATIVO - Hanging

Indoor suspended lamp with integrated LED sources and direct light emission

Ean	8021696259192
Item	ORACLE SLIM SP D090 SQUARE 3000K ON-OFF WH
Installation	Suspension
Guarantee	5 years
Gross weight	5.1 kg
Volume	0.131726 m ³

Technical info

Net weight	2.1 kg
Insulation class	II
Protection index	IP20
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included YES (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	53W
Emission	Direct
Max consupcion	max 53 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	5250 lm
Useful light flux	3120 lm
Standby power	< 0.50

ideal lux®

IDEAL LUX s.r.l.
Via Taglio Destro 32
30035 Mirano (VE) Italy
www.ideal-lux.com


IDEAL LUX Warehouse
Via delle Industrie, 8/D
30036 Santa Maria di Sala (Venezia)
8.00 - 12.00 / 13.30 - 17.00

ideal lux®



REV 12/09/2022



Oracle Slim SP D150 Round On-Off



Lampada a sospensione
Suspension lamp
Suspension
Pendelleuchte
Lámpara colgante
Настольные лампы

LED

89W LED / 220~240V 50/60Hz
- 8021696265957 BIANCO 3000 K
- 8021696285078 BIANCO 4000 K
- 8021696285061 NERO 3000 K
- 8021696304472 NERO 4000 K

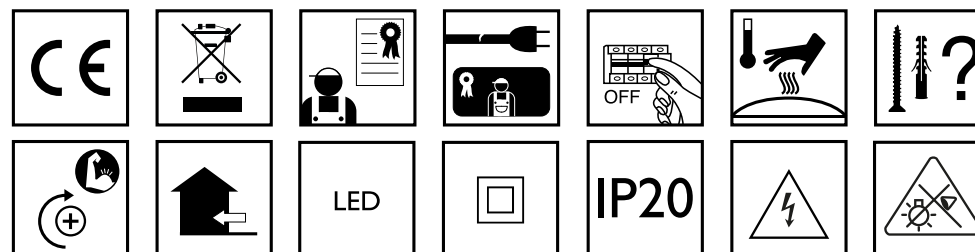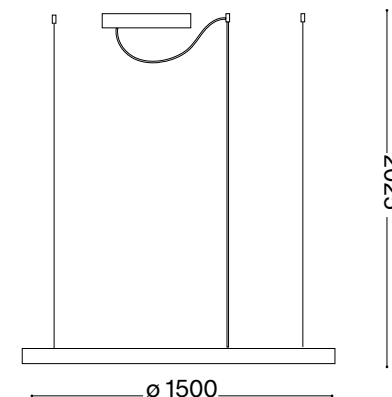


IDEAL LUX s.r.l.
Via Taglio Destro 32
30035 Mirano (VE) Italy
www.ideal-lux.com



IDEAL LUX Warehouse
Via delle Industrie, 8/D
30036 Santa Maria di Sala (Venezia)
8.00 - 12.00 / 13.30 - 17.00

ESEGUIRE LE OPERAZIONI SEGUENDO L'ORDINE PROGRESSIVO.
FOLLOW THE ASSEMBLY INSTRUCTIONS BY READING THE NUMERICAL PROGRESSION.


L'INSTALLAZIONE DI QUESTO APPARECCHIO DEVE ESSERE EFFETTUATA DA PERSONALE
QUALIFICATO. THE LIGHTING FITTING SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN.




①

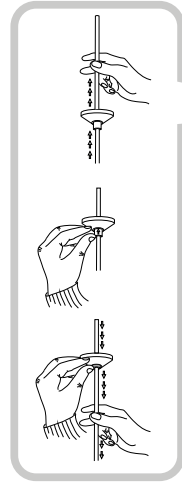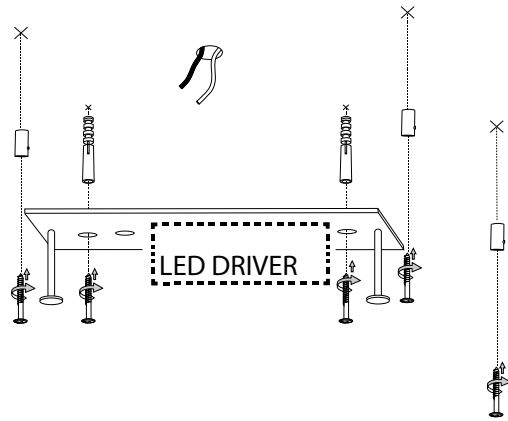

x2


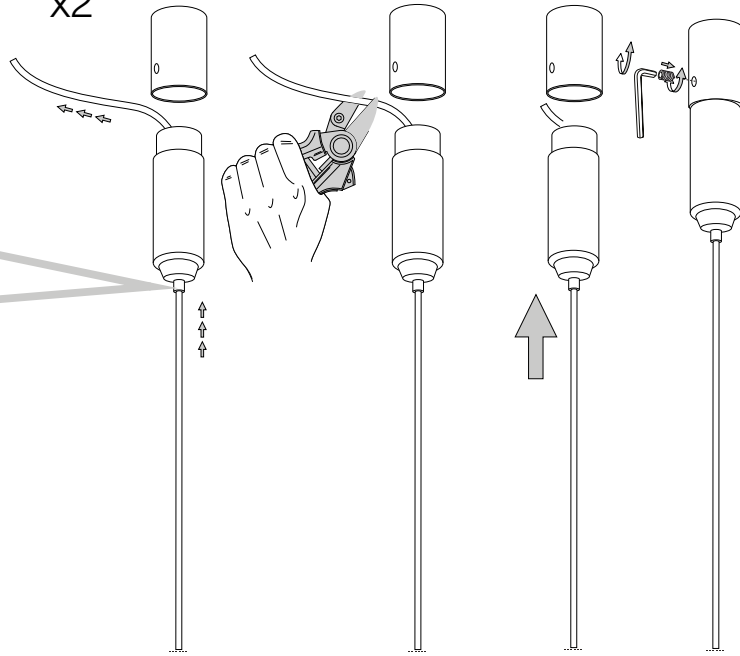


②

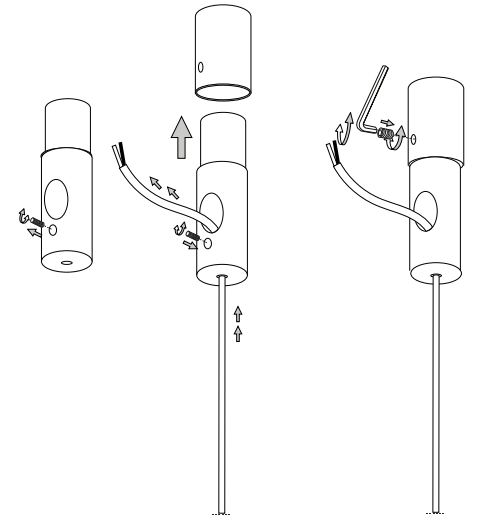


③


④

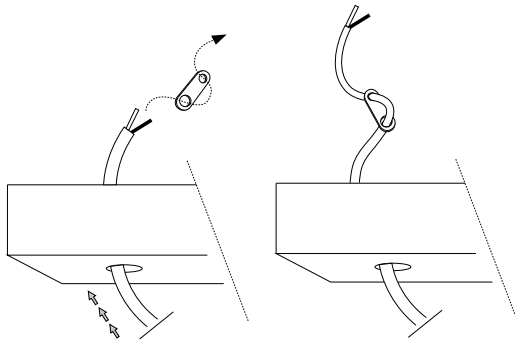


A

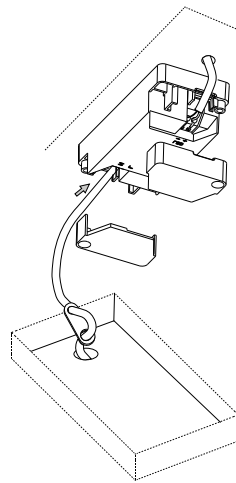

B

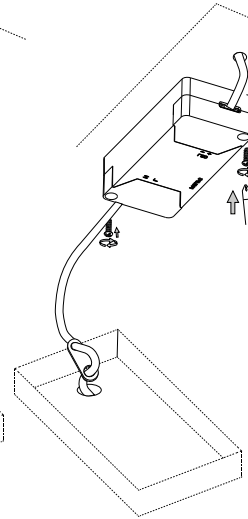


C

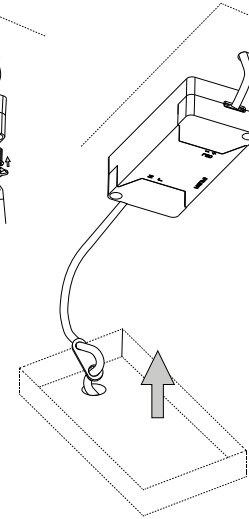

D

⑤

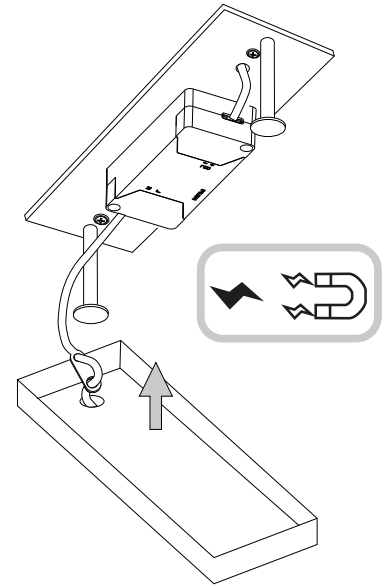

⑥

LA SICUREZZA DI QUESTO APPARECCHIO È GARANTITA SOLO CON L'USO APPROPRIATO DI QUESTE ISTRUZIONI, PERTANTO È NECESSARIO CONSERVARLE.

THE SAFETY AND RELIABILITY ARE GUARANTEED ONLY WHEN INSTALLATION INSTRUCTIONS ARE PROPERLY FOLLOWED. PLEASE KEEP THIS INSTRUCTION SHEET FOR FUTURE REFERENCE.