

Out


4270

Design By Víctor Carrasco

The Out outdoor lamp, ideal for creating the home's atmosphere and aesthetic character outdoors, illuminating open spaces with downward light. This version isn't fixed to the ground.

VIBIA

Model Sheet

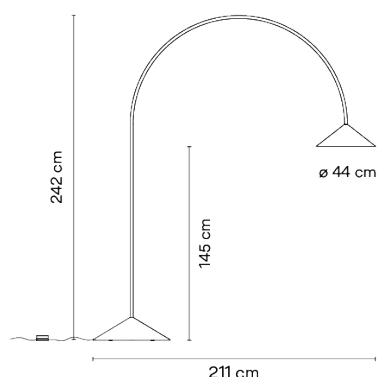

Finish

- 36 Soft Pink
NCS S 1010-Y50R
- 23 Warm White
NCS S 0502-Y50R
- 37 Terra Red
NCS S 4040-Y70R
- 25 Beige D1
NCS S 4005-Y50R
- 22 Graphite Black
NCS S 2005-Y50R
- 47 Green L1
NCS S 4005-G80Y

LED temperature color 2700 K

Dimming CASAMBI / Push

Installation type Plug-in

Materials Base: Aluminum
Tube: Stainless steel

LED E
CRI>90 1362.32 lm 106.18
2700 K

Driver Constant Current 700
220~240 V V 50~60 Hz HZ

☐ Dimmer ☒ LED ☐ 50-60Hz

☒ PUSH


Application Outdoor lamps

Packaging 5 Box
0.1 m x 2.1 m x 2.4 m
Gross weight 84
Net weight 49.5
Vol. 0.9519

Lighting effect

General Lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency 33.05 lm/W
Coordinate System CG
Total Flux 502.42 lm
Maximum Value 183.98 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty


Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Model Sheet

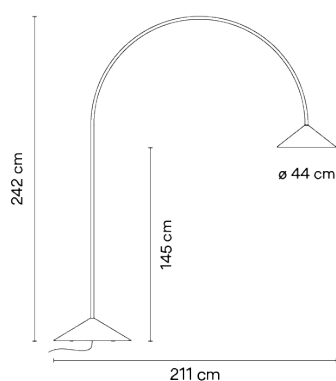

Finish

25 Beige D1
NCS S 4005-Y50R

36 Soft Pink
NCS S 1010-Y50R

37 Terra Red
NCS S 4040-Y70R

47 Green L1
NCS S 4005-G80Y

22 Graphite Black
NCS S 2005-Y50R

23 Warm White
NCS S 0502-Y50R

LED temperature color	2700 K
Dimming	CASAMBI
Installation type	Remote basic / Surface

Materials	Base: Aluminum
	Tube: Stainless steel

LED	E
	CRI>90 1362.32 lm 106,18 2700 K

Driver	Constant Current 700 220~240 V V 50~60 Hz HZ
--------	---

☐	Dimmable	IP65	50-60Hz
--------------------------	----------	------	---------


Application	Outdoor lamps
-------------	---------------

Packaging	5 Box
	0.1 m x 2.1 m x 2.4 m
	Gross weight 84
	Net weight 49.5
	Vol. 0.9519

Lighting effect

General Lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	33.05 lm/W
Coordinate System	CG
Total Flux	502.42 lm
Maximum Value	183.98 cd

Other Applications

