



General info


DECORATIVO - Hanging

Indoor suspended lamp with integrated LED sources and diffuse light emission

Ean	8021696253664
Item	OZ SP D80 ON-OFF BIANCO
Installation	Suspension
Guarantee	5 years
Gross weight	3.72 kg
Volume	0.1215 m ³


Technical info

Net weight	1.92 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	No dimmerable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included YES (by qualified operators only), electronic



Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	LED 59W
Emission	Diffuse
Max consumption	max 59 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	30000 h
CRI	> 80
Light beam	120°
Light beam flux	6000 lm
Useful light flux	3540 lm
Standby power	< 0.50

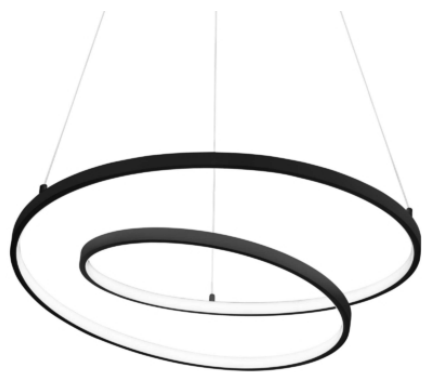

General info

DECORATIVO - Hanging


Indoor suspended lamp with integrated LED sources and diffuse light emission

Ean	8021696269450
Item	OZ SP D80 ON-OFF NERO
Installation	Suspension
Guarantee	5 years
Gross weight	3.72 kg
Volume	0.1215 m ³

Technical info


Net weight	1.92 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	No dimmerable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included
	YES (by qualified operators only), electronic

F



Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	LED 59W
Emission	Diffuse
Max consumption	max 59 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	30000 h
CRI	> 80
Light beam	120°
Light beam flux	6000 lm
Useful light flux	3540 lm
Standby power	< 0.50



General info

DECORATIVO - Hanging

Indoor suspended lamp with integrated LED sources and diffuse light emission

Ean	8021696269467
Item	OZ SP D80 ON-OFF OTTONE
Installation	Suspension
Guarantee	5 years
Gross weight	3.72 kg
Volume	0.1215 m ³

Technical info

Net weight	1.92 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	No dimmerable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included YES (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	NO
Power	LED 59W
Emission	Diffuse
Max consumption	max 59 W
Features LED	LED SMD
CCT	3000 K
Duration LED (t. 25°C)	30000 h
CRI	> 80
Light beam	120°
Light beam flux	6000 lm
Useful light flux	3540 lm
Standby power	< 0.50


ideal lux®

IDEAL LUX s.r.l.
Via Taglio Destro 32
30035 Mirano (VE) Italy
www.ideal-lux.com

IDEAL LUX Warehouse
Via delle Industrie, 8/D
30036 Santa Maria di Sala (Venezia)
8.00 - 12.00 / 13.30 - 17.00

ideal lux®


Oz SP D80 On-Off



Lampada a sospensione
Suspension lamp
Suspension
Pendelleuchte
Lámpara colgante
Настольные лампы


LED

55W LED / 220~240V 50/60Hz
- 8021696253664 BIANCO
- 8021696269450 NERO
- 8021696269467 OTTONE



2240

ø 800




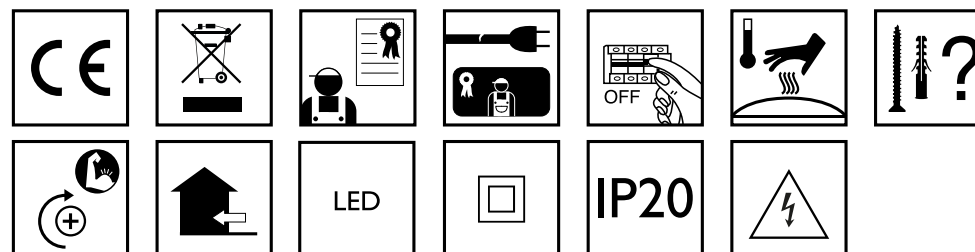


IDEAL LUX s.r.l.
Via Taglio Destro 32
30035 Mirano (VE) Italy
www.ideal-lux.com

IDEAL LUX Warehouse
Via delle Industrie, 8/D
30036 Santa Maria di Sala (Venezia)
8.00 - 12.00 / 13.30 - 17.00

ESEGUIRE LE OPERAZIONI SEGUENDO L'ORDINE PROGRESSIVO.
FOLLOW THE ASSEMBLY INSTRUCTIONS BY READING THE NUMERICAL PROGRESSION.

L'INSTALLAZIONE DI QUESTO APPARECCHIO DEVE ESSERE EFFETTUATA DA PERSONALE
QUALIFICATO. THE LIGHTING FITTING SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN.

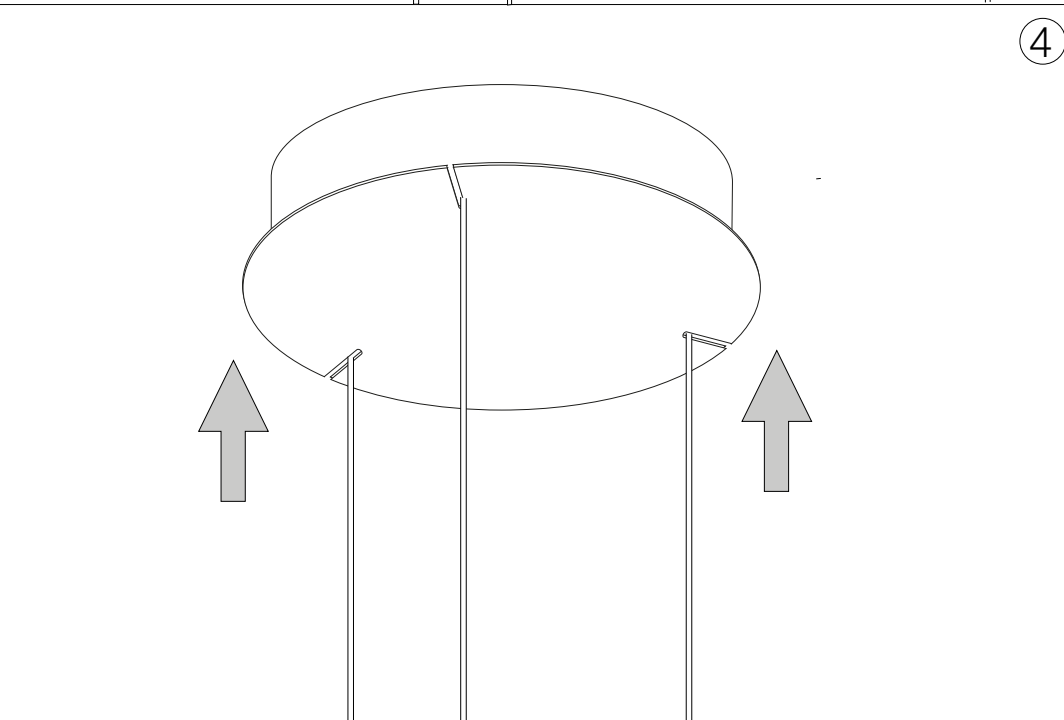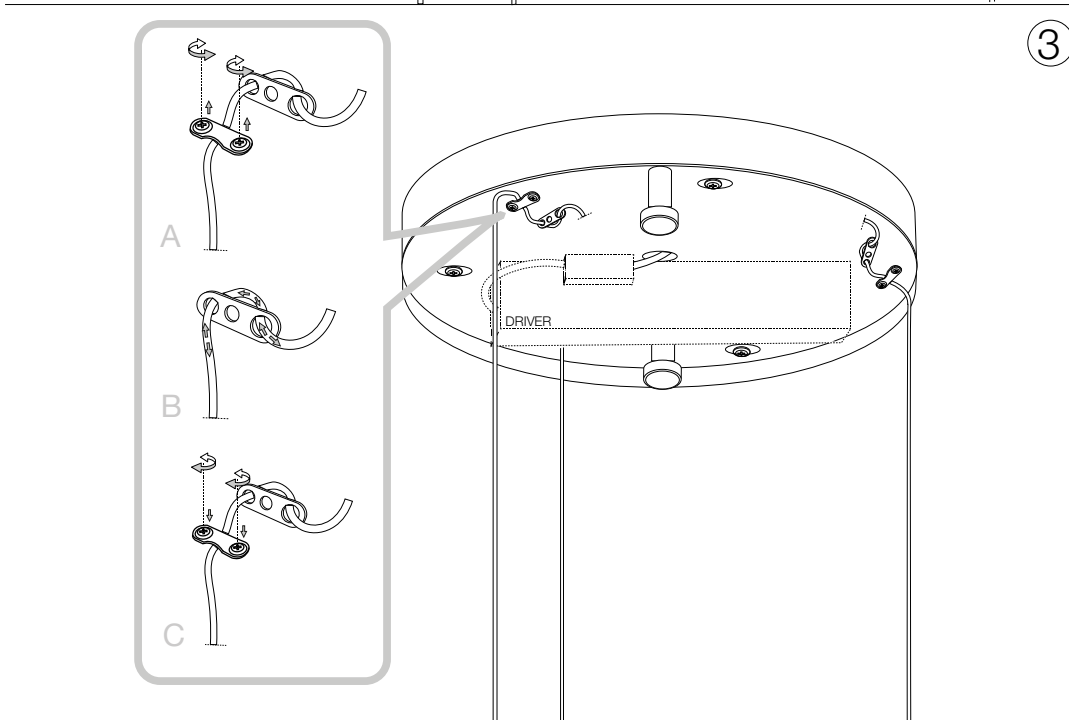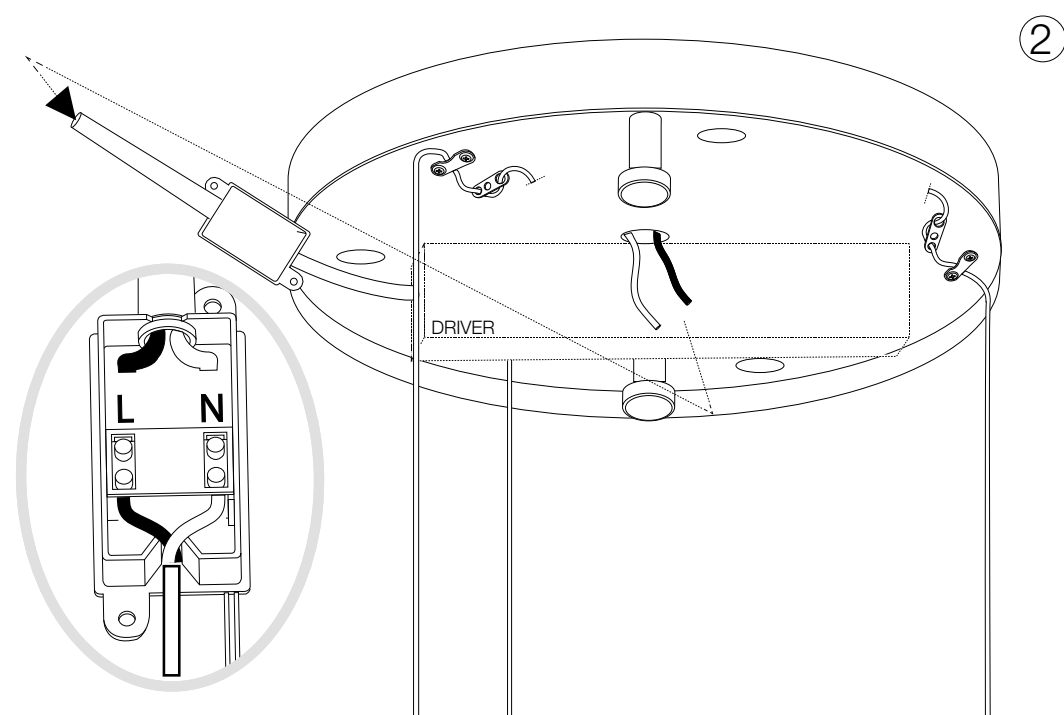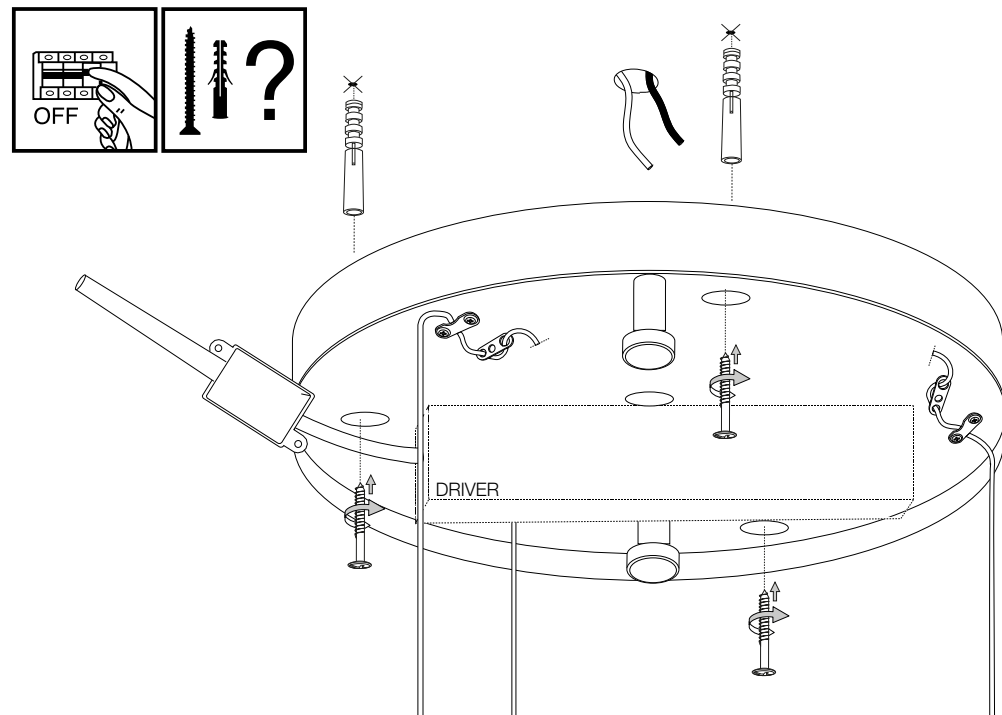

LA SICUREZZA DI QUESTO APPARECCHIO È GARANTITA SOLO CON L'USO APPROPRIATO DI QUESTE ISTRUZIONI, PERTANTO È NECESSARIO CONSERVARLE.

THE SAFETY AND RELIABILITY ARE GUARANTEED ONLY WHEN INSTALLATION INSTRUCTIONS ARE PROPERLY FOLLOWED. PLEASE KEEP THIS INSTRUCTION SHEET FOR FUTURE REFERENCE.