

FLOS


F5910020 Glass

Ray Table

Designed by Rodolfo Dordoni, 2007

Halogen - 150W

Table lamp providing diffused lighting. Steel tube (10 mm diam.) structure, welded, brushed and chrome-plated. Diffuser support disk in die-cast, polished and chrome-plated Zamak alloy. White injection-molded PA6 (nylon) lamp cover. Injection-molded PC (polycarbonate) inner diffuser in 3% opal color. Transparent injection-molded elastic PVC (polyvinylchloride) feet. Lathe-shaped aluminum diffusers, painted white on the inside, and shiny white or black on the outside or gray-colored, blown and overlaid glass with glossy external finish. On the cable there is the electronic dimmer which allows the regulation of light brightness.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Table
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGS
Number of lamps	1
Power (W)	150

Physical

Colour	Glass
Length (mm)	360
Cord colour	Black
Cord length (mm)	1850
Net weight (kg)	6.5
Package volume (m3)	0.14
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)

Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



FLOS

F5911009 White

Ray Table

Designed by Rodolfo Dordoni, 2007


Halogen - 150W



Table lamp providing diffused lighting. Steel tube (10 mm diam.) structure, welded, brushed and chrome-plated. Diffuser support disk in die-cast, polished and chrome-plated Zamak alloy. White injection-molded PA6 (nylon) lamp cover. Injection-molded PC (polycarbonate) inner diffuser in 3% opal color. Transparent injection-molded elastic PVC (polyvinylchloride) feet. Lathe-shaped aluminum diffusers, painted white on the inside, and shiny white or black on the outside or gray-colored, blown and overlaid glass with glossy external finish. On the cable there is the electronic dimmer which allows the regulation of light brightness.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Table
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGS
Number of lamps	1
Power (W)	150

Physical

Colour	White
Length (mm)	360
Cord colour	Black
Cord length (mm)	1850
Net weight (kg)	4.2
Package volume (m3)	0.1
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)

Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



FLOS


■ F5911030 Black

Ray Table

Designed by Rodolfo Dordoni, 2007

Halogen - 150W

Table lamp providing diffused lighting. Steel tube (10 mm diam.) structure, welded, brushed and chrome-plated. Diffuser support disk in die-cast, polished and chrome-plated Zamak alloy. White injection-molded PA6 (nylon) lamp cover. Injection-molded PC (polycarbonate) inner diffuser in 3% opal color. Transparent injection-molded elastic PVC (polyvinylchloride) feet. Lathe-shaped aluminum diffusers, painted white on the inside, and shiny white or black on the outside or gray-colored, blown and overlaid glass with glossy external finish. On the cable there is the electronic dimmer which allows the regulation of light brightness.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Table
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGS
Number of lamps	1
Power (W)	150

Physical

Colour	Black
Length (mm)	360
Cord colour	Black
Cord length (mm)	1850
Net weight (kg)	4.2
Package volume (m3)	0.1
IP internal	20

Download

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  LDT


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing




Photometric

Lighting type	Direct, Indirect
Light distribution	Asymmetric
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Dimmable	Yes
Dimming interface	Dimmer Integrated
Plug type	Type C
Batteries inside	No

Bulbs



NOT INCLUDED


RF32563
LED Lamp 11.5W E27 220-240V
2700K A70




NOT INCLUDED

RF32564
LED Lamp 11.5W E27 220-240V
3000K A70

Spare Parts

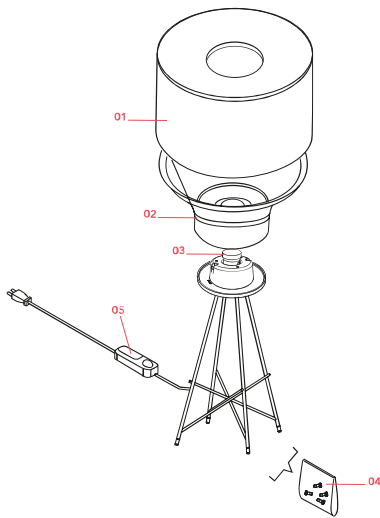

- | | | |
|-----|---|-----------|
| 01. | Ray Floor 1-Table diffuser | RF16084 |
| 02. | diffuser support | RF15854 |
| 03. | Porcelain E27 lamp holder | RF04487 |
| 04. | Ray Table Kit of quantity 4 adjustable feet | RF5912200 |
| 05. | Black Dimmer Switch | RF28206 |



RF16084
Ray Floor 1-Table diffuser



RF15854
diffuser support



RF04487
Porcelain E27 lamp holder



RF5912200
Ray Table Kit of quantity 4
adjustable feet



RF28206
Black Dimmer Switch