

# MAGNETIC

SPLITLINE M20  
ST

SPLITLINE M20

SPLITLINE M52


## SPLITLINE

With the magnetic profiles, Delta Light takes it to the next level in the profile section. These profiles offer the highest degree of freedom and flexibility, as all modules have a magnetic fixation. Splitline M20 and M52 allow for a neat, trimless installation, while Shiftline M26 can be used for projects where surface or suspended mounting is required. To create the optimal light setting, multiple light modules are available: spot modules with different beams and lumen packages going up to 2000lm for accent lighting, linear LED lines for general or wallwash lighting and pendant modules for an elegant finish of the room. All modules can be placed toolfree into the profile and repositioned afterwards thanks to their magnetic fixation. Simply click the module into the profile and both mechanical and electrical connection are ensured. As this family of profiles is powered by 48V, Smart 48 can be used for an easy 2-wire dimming/power solution, or even wireless. For individual control of luminaires, one can opt for a DALI controlled system.


[deltalight.com/shiftline](https://deltalight.com/shiftline)  
[deltalight.com/splitline](https://deltalight.com/splitline)

# SPLITLINE M


PRO



57 x (L + 5) x 85  
min.9 / max.25



32 x (L + 10) x 90  
min.9 / max.25



121 x (L + 5) x 150  
min.9 / max.12

## SPLITLINE

|                        | M20                     | M20 ST                      | M52                     |
|------------------------|-------------------------|-----------------------------|-------------------------|
| <b>1 PROFILE</b>       |                         |                             |                         |
| PROFILE 1m             | 420 20 10 00 ◇<br>◇ B ● | -                           | 420 52 10 00 ◇<br>◇ B ● |
| PROFILE 2m             | 420 20 20 00 ◇<br>◇ B ● | 23397 0020 ◇<br>◇ B ● / W ○ | 420 52 20 00 ◇<br>◇ B ● |
| PROFILE 3m             | 420 20 30 00 ◇<br>◇ B ● | 23397 0030 ◇<br>◇ B ● / W ○ | 420 52 30 00 ◇<br>◇ B ● |
| CUSTOMISED PROFILE / m | 23301 0000 ◇<br>◇ B ●   | 23397 0000 ◇<br>◇ B ● / W ○ | 24413 0000 ◇<br>◇ B ●   |

## 2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

## 3 JUNCTION / CORNER

|                              |              |                  |              |
|------------------------------|--------------|------------------|--------------|
| CORNER 180°                  | 420 06 01    | -                | 420 06 01    |
| CORNER 90°                   | 420 20 06 06 | 23397 0640 B / W | 420 52 06 06 |
| CORNER 90° V                 | 420 20 06 17 | -                | -            |
| CORNER T                     | 23302 0010   | -                | -            |
| CORNER X                     | 23302 0020   | -                | -            |
| CORNER SET R 45° S           | 23302 0030   | -                | -            |
| CORNER SET R 90° S (R 102mm) | 23302 0040   | -                | -            |
| CORNER SET R 90° (R 240mm)   | 23301 0690   | -                | -            |
| LIGHT + AIR KIT              | 29810 1010   | -                | -            |

## 4 ENDCAP

|                 |                |                  |                |
|-----------------|----------------|------------------|----------------|
| ENDCAP (2 PCS.) | 420 20 03 01 B | 23397 0310 B / W | 420 52 03 01 B |
|-----------------|----------------|------------------|----------------|

## 5 FIXATION

|                            |              |            |              |
|----------------------------|--------------|------------|--------------|
| RECESSED                   |              |            |              |
| FIXATION SET (2 PCS.)      | 420 20 14 01 |            | -            |
| INSIDE CLIP (1 PC.)        | -            | 23397 0140 | -            |
| SUSPENSION BRACKET (1 PC.) | -            | -          | 420 52 98 01 |

## 6 CONNECTION (max.200W/supply/max.50m)

|                           |            |           |           |
|---------------------------|------------|-----------|-----------|
| SUPPLY 48V-DC             | 420 99 03  | 420 99 03 | 420 99 03 |
| CONNECTOR 48V-DC - 180°   | 420 99 01  | 420 99 01 | 420 99 01 |
| CONNECTOR 48V-DC - 0-180° | 420 99 02  | 420 99 02 | 420 99 02 |
| LIGHT + AIR ADAPTER SET   | 29810 1020 | -         | -         |

## 7 LIGHT MODULES

## LIGHT MODULES

SEE PAGE 388-405




# How to build your SPLITLINE

Example for Splitline M20


PRO

PROFILES



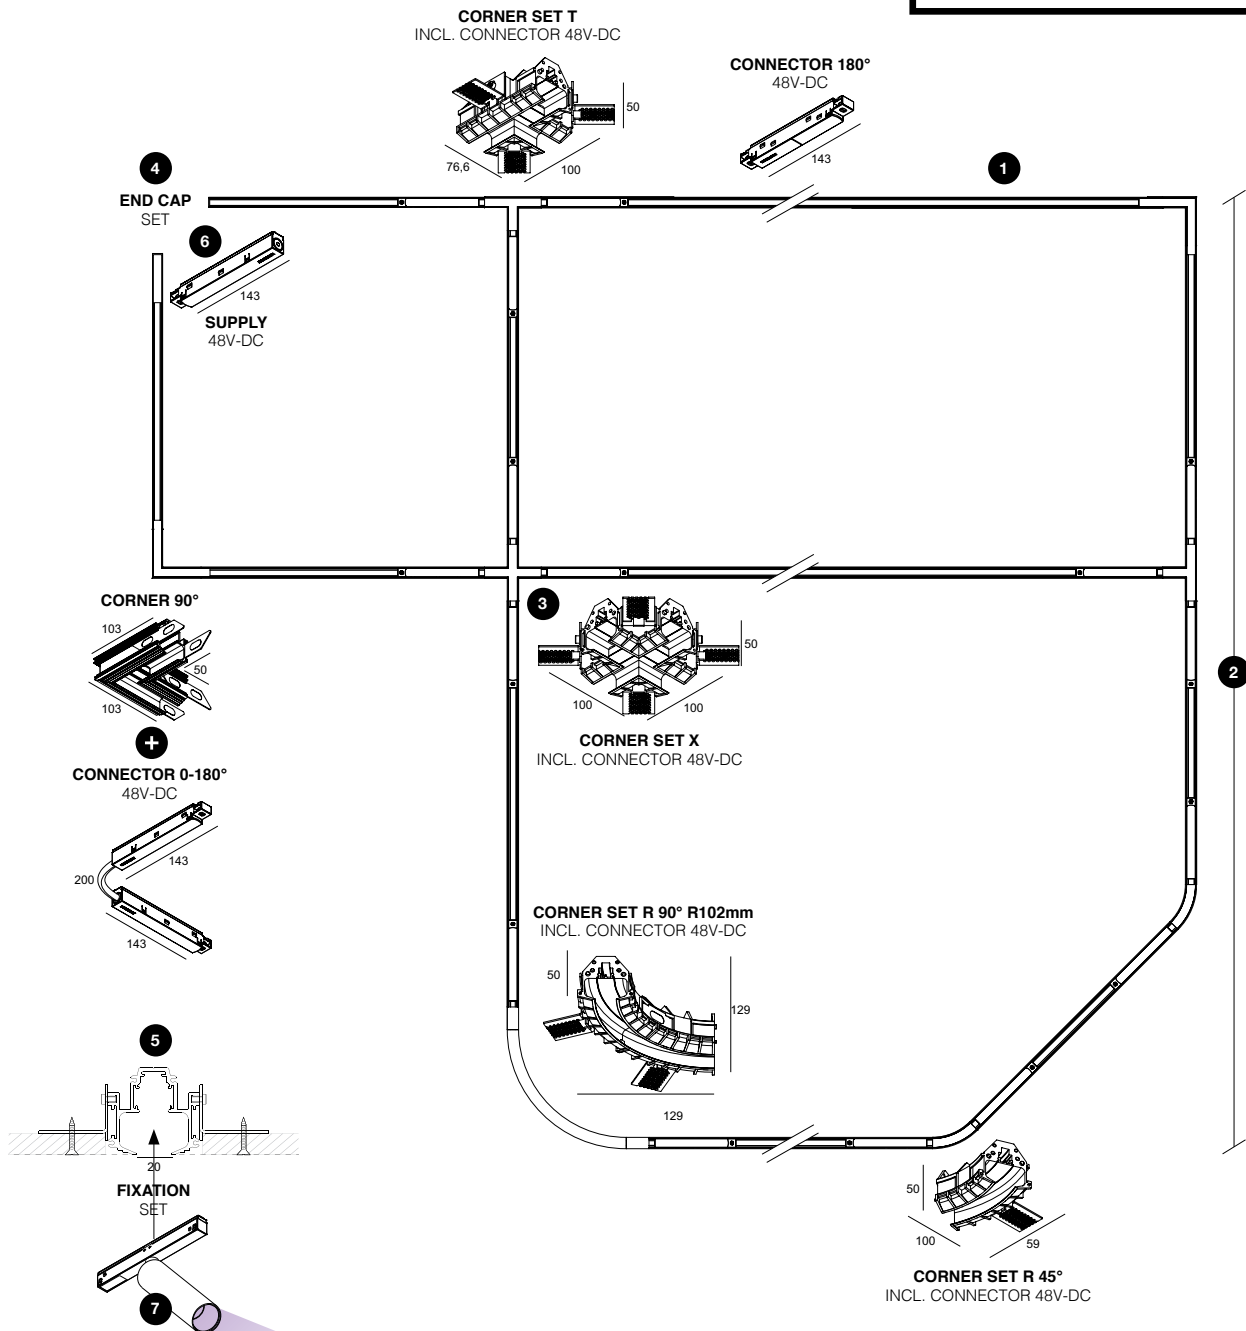


By adding the SPM20 - **▲IR** Kit to the profile, the set-up can also be used for air extraction or air supply, a clever and neat combination of lighting and ventilation into 1 single black line. Be it at the end of the black line or in the middle of the construction, the **▲IR** Kit can be freely integrated into the profile, as an additional adapter set can be included in the **▲IR** Kit for easy through-wiring of the 48V.

# INSTALLATION IN LINE WITH SPM20

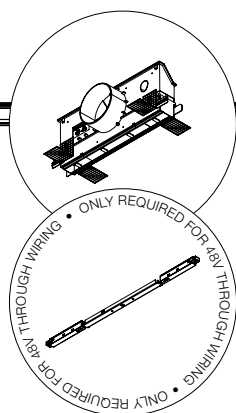

# A

**SPY 522 AIR**

|                 |                                |      |     |              |              |  |
|-----------------|--------------------------------|------|-----|--------------|--------------|--|
| 3000K<br>CRI>90 | 4x LED [A] 2W / 232lm / 700mA  | IP20 | 30° | 29811 9320 ◇ |              |  |
|                 | 2x                             |      | 20° | 29813 9320 ◇ |              |  |
|                 | LED [U] 8.6W / 1089lm / 500mA  |      | 40° | 29813 9330 ◇ |              |  |
|                 | LED [U] 12.4W / 1467lm / 700mA |      | 20° |              | 29815 9320 ◇ |  |
|                 |                                |      | 45° |              | 29815 9330 ◇ |  |
| 2700K<br>CRI>90 | 4x LED [A] 2W / 221lm / 700mA  |      | 30° | 29811 9220 ◇ |              |  |
|                 | 2x                             |      | 20° | 29813 9220 ◇ |              |  |
|                 | LED [U] 8.6W / 1041lm / 500mA  |      | 40° | 29813 9230 ◇ |              |  |
|                 | LED [U] 12.4W / 1403lm / 700mA |      | 20° |              | 29815 9220 ◇ |  |
|                 |                                |      | 45° |              | 29815 9230 ◇ |  |

◆ B ●

◇ B ● / FBR ● / FG ● / GC ● / W ○





# How to control your SPLITLINE or SHIFTLINE

MORE INFO TECHNICAL CHAPTER

SMART  
48



A

PRO

PROFILES

B

Hey Google,...

SLM26 H  
VOICE COMMAND  
GOOGLE HOLDERSLM26 L  
VOICE COMMAND  
GOOGLE HOLDER

M20

M20 ST

M52

M26 L

M26 H

M26 H + SBL


## VOICE CONTROL

|                                     |   |   |   |                  |                  |                  |
|-------------------------------------|---|---|---|------------------|------------------|------------------|
| VOICE COMMAND GOOGLE HOLDER *       | - | - | - | 21032 0250 B / W | 21032 0260 B / W | 21032 0260 B / W |
| <b>SENSOR</b>                       |   |   |   |                  |                  |                  |
| DALI PRESENCE & DAYLIGHT SENSOR     |   |   |   | 21032 0185       |                  |                  |
| WIRELESS PRESENCE & DAYLIGHT SENSOR |   |   |   | 21032 0040       |                  |                  |
| WIRELESS SENSOR HUB **              |   |   |   | 21032 0190       |                  |                  |


\* FOR GOOGLE NEST 2ND GENERATION SPEAKER

\*\* PRESENCE &amp; DAYLIGHT / TEMPERATURE / HUMIDITY / AIR QUALITY

## Interact with your surroundings



WIRELESS SENSOR HUB

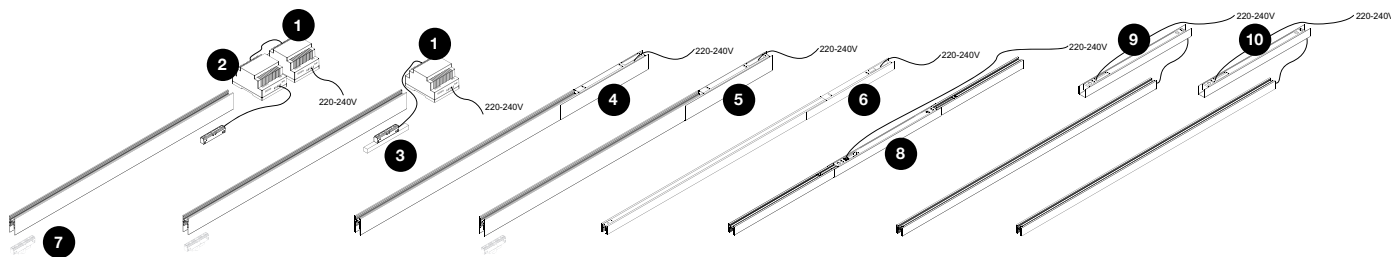PRESENCE &  
DAYLIGHT SENSOR

- 1 POWERSUPPLY 48V-DC
- 2 SMART 48 MODULATOR
- 3 SMART 48 MODULATOR PLUG-IN WIRELESS DIM
- 4 SLM26H POWERBOX 48V/100W
- 5 SLM26H POWERBOX 48V/100W MDL
- 6 SLM26L POWERBOX 48V/100W
- 7 M-WIRELESS PRESENCE & DAYLIGHT SENSOR
- 8 SLM26L MID POWERBOX 48V/100W
- 9 SLM26L POWERBOX FOR SUSPENSION 48V/100W
- 10 SLM26L POWERBOX FOR SUSPENSION 48V/100W WIRELESS DIM

## FINISH YOUR SPECIFICATION

## REQUIREMENT / OPTION / ACCESSORY

## LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

|                                            |               |                |      |      |     |     |
|--------------------------------------------|---------------|----------------|------|------|-----|-----|
| NON DIM - 48V-DC - 240W                    | 300 89 48 240 | 114 x 63 x 125 | R *  | R *  | R * | R * |
| <b>CONTROL</b> MORE INFO TECHNICAL CHAPTER |               |                |      |      |     |     |
| WIRELESS MODULATOR                         | 300 90 012    |                |      |      | R * | R * |
| DALI VOICE CONTROL                         | 21032 0245    | 91 x 44 x 23   | R ** | O ** |     |     |

\* REMOTE INSTALLATION


\*\* MAX 64 DALI DEVICES

# MAGNETIC MODULES



| LED LINE UP  |                       |      |         | M26H         | M26L | M52 |
|--------------|-----------------------|------|---------|--------------|------|-----|
| 3000K CRI>90 | 13W / 1160lm / 24V-DC | IP20 | L 830mm | 23376 9300 ◇ |      |     |
| 2700K CRI>90 | 13W / 1160lm / 24V-DC |      |         | 23376 9200 ◇ |      |     |

◇ ANO ●




| INFORM          |                             |      | UCR<br>≤19 | M20 / M26H / M26H+SBL* | M26L         |              | M52          |     |      |
|-----------------|-----------------------------|------|------------|------------------------|--------------|--------------|--------------|-----|------|
|                 |                             |      |            | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | LED 11,6W / 1714lm / 48V-DC | IP20 | L 800      | 23381 9320 ◇           | 23382 9325 ◇ | 23381 9320 ◇ | 23382 9325 ◇ |     |      |
|                 | LED 16,6W / 2429lm / 48V-DC |      | L1100      | 23383 9320 ◇           | 23384 9325 ◇ | 23383 9320 ◇ | 23384 9325 ◇ |     |      |
| 2700K<br>CRI>90 | LED 11,6W / 1688lm / 48V-DC |      | L 800      | 23381 9220 ◇           | 23382 9225 ◇ | 23381 9220 ◇ | 23382 9225 ◇ |     |      |
|                 | LED 16,6W / 2395lm / 48V-DC |      | L1100      | 23383 9220 ◇           | 23384 9225 ◇ | 23383 9220 ◇ | 23384 9225 ◇ |     |      |

\*MDL: MODULES NOT FOR M26H + SBL PROFILE

◇ B ●

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ●




| LED LINE HE                                                                                                                                       |                                                      |      |         | M20 / M26H / M26H+SBL* |              | M26L                |              | M52 |  |      |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------|---------|------------------------|--------------|---------------------|--------------|-----|--|------|--|
|                                                                                                                                                   |                                                      |      |         | MDL                    |              | DALI **             |              | MDL |  | DALI |  |
| <div>3000K<br/>CRI&gt;90</div>                                                                                                                    | LED 12,6W / 1500lm / 48V-DC                          | IP20 | L 610mm | 421 313 06 93 MDL ◇    | 23347 0005 ◇ | 421 313 06 93 MDL ◇ | 23347 0005 ◇ |     |  |      |  |
|                                                                                                                                                   | LED 18W / 2240lm / 48V-DC                            |      | L 810mm | 421 313 08 93 MDL ◇    | 23348 0005 ◇ | 421 313 08 93 MDL ◇ | 23348 0005 ◇ |     |  |      |  |
|                                                                                                                                                   | LED 21,6W / 2600lm / 48V-DC                          |      | L1010mm | 421 313 10 93 MDL ◇    | 23349 0005 ◇ | 421 313 10 93 MDL ◇ | 23349 0005 ◇ |     |  |      |  |
|                                                                                                                                                   | LED 25,2W / 3000lm / 48V-DC                          |      | L1210mm | 421 313 12 93 MDL ◇    | 23350 0005 ◇ | 421 313 12 93 MDL ◇ | 23350 0005 ◇ |     |  |      |  |
| <div>3000-1800K<br/>CRI&gt;90</div> <div></div>                | LED 8,4W / 535lm / 48V-DC                            | IP20 | L 621mm | 23303 9000 ◇           | 23307 9005 ◇ | 23303 9000 ◇        | 23307 9005 ◇ |     |  |      |  |
|                                                                                                                                                   | LED 10,8W / 681lm / 48V-DC                           |      | L 787mm | 23304 9000 ◇           | 23308 9005 ◇ | 23304 9000 ◇        | 23308 9005 ◇ |     |  |      |  |
|                                                                                                                                                   | LED 14,4W / 912lm / 48V-DC                           |      | L1009mm | 23305 9000 ◇           | 23309 9005 ◇ | 23305 9000 ◇        | 23309 9005 ◇ |     |  |      |  |
|                                                                                                                                                   | LED 16,8W / 1064lm / 48V-DC                          |      | L1176mm | 23306 9000 ◇           | 23310 9005 ◇ | 23306 9000 ◇        | 23310 9005 ◇ |     |  |      |  |
| <div>NEW</div> <div>6500-2700K<br/>CRI&gt;90</div> <div></div> | LED 7,6W / 6500K / 1000lm - 2700K / 875lm - 48V-DC   | IP20 | L 635mm |                        | 23319 9005 ◇ |                     | 23319 9005 ◇ |     |  |      |  |
|                                                                                                                                                   | LED 9,8W / 6500K / 1300lm - 2700K / 1138lm - 48V-DC  |      | L 823mm |                        | 23320 9005 ◇ |                     | 23320 9005 ◇ |     |  |      |  |
|                                                                                                                                                   | LED 12,1W / 6500K / 1600lm - 2700K / 1400lm - 48V-DC |      | L1010mm |                        | 23321 9005 ◇ |                     | 23321 9005 ◇ |     |  |      |  |
|                                                                                                                                                   | LED 14,4W / 6500K / 1900lm - 2700K / 1662lm - 48V-DC |      | L1198mm |                        | 23322 9005 ◇ |                     | 23322 9005 ◇ |     |  |      |  |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

\*\* TUNABLE WHITE DALI DTS

◇ B ●




| LED LINE OK       |                           |      | M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-------------------|---------------------------|------|------------------|--------------|--------------|--------------|-----|------|
|                   |                           |      | MDL              | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90   | LED 18W / 2240lm / 48V-DC | IP20 | 29319 9300 ◇     | 29320 9305 ◇ | 29315 9300 ◇ | 29316 9305 ◇ |     |      |
| 2700K /<br>CRI>90 | LED 18W / 2240lm / 48V-DC |      | 29319 9200 ◇     | 29320 9205 ◇ | 29315 9200 ◇ | 29316 9205 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○






## DOT.COM M4

|                 |                              | M20 / M26H / M26H+SBL* |      | M26L                |              | M52                 |              |
|-----------------|------------------------------|------------------------|------|---------------------|--------------|---------------------|--------------|
|                 |                              | MDL                    | DALI | MDL                 | DALI         | MDL                 | DALI         |
| 3000K<br>CRI>90 | LED 5,7W /<br>631lm / 48V-DC | IP20                   | 14°  | 424 612 04 931 MDL◇ | 23355 9315 ◇ | 424 612 04 931 MDL◇ | 23355 9315 ◇ |
|                 |                              |                        | 33°  | 424 612 04 932 MDL◇ | 23355 9325 ◇ | 424 612 04 932 MDL◇ | 23355 9325 ◇ |
|                 |                              |                        | 49°  | 424 612 04 933 MDL◇ | 23355 9335 ◇ | 424 612 04 933 MDL◇ | 23355 9335 ◇ |
| 2700K<br>CRI>90 | LED 5,7W /<br>631lm / 48V-DC |                        | 14°  | 424 612 04 921 MDL◇ | 23355 9215 ◇ | 424 612 04 921 MDL◇ | 23355 9215 ◇ |
|                 |                              |                        | 33°  | 424 612 04 922 MDL◇ | 23355 9225 ◇ | 424 612 04 922 MDL◇ | 23355 9225 ◇ |
|                 |                              |                        | 49°  | 424 612 04 923 MDL◇ | 23355 9235 ◇ | 424 612 04 923 MDL◇ | 23355 9235 ◇ |


\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B-B ● / ◇ B-C ● / ◇ B-MMAT ●



POSITION FOR INSTALLATION

## DOT.COM WALLWASH

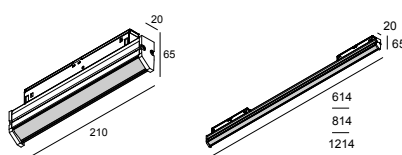


|                 |                             | M20 / M26H / M26H+SBL* |         | M26L                |              | M52 |      |
|-----------------|-----------------------------|------------------------|---------|---------------------|--------------|-----|------|
|                 |                             | MDL                    | DALI    | MDL                 | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | LED 9,6W / 1068lm / 48V-DC  | IP20                   | L 210mm | 424 642 02 93 MDL ◇ | 23367 9305 ◇ |     |      |
|                 | LED 12,6W / 1500lm / 48V-DC |                        | L 614mm | 424 642 06 93 MDL ◇ | 23368 9305 ◇ |     |      |
|                 | LED 18W / 2240lm / 48V-DC   |                        | L814mm  | 424 642 08 93 MDL ◇ | 23369 9305 ◇ |     |      |
|                 | LED 25,2W / 3000lm / 48V-DC |                        | L1214mm | 424 642 12 93 MDL ◇ | 23370 9305 ◇ |     |      |
| 2700K<br>CRI>90 | LED 9,6W / 998lm / 48V-DC   |                        | L 210mm | 424 642 02 92 MDL ◇ | 23367 9205 ◇ |     |      |
|                 | LED 12,6W / 1500lm / 48V-DC |                        | L 614mm | 424 642 06 92 MDL ◇ | 23368 9205 ◇ |     |      |
|                 | LED 18W / 2240lm / 48V-DC   |                        | L814mm  | 424 642 08 92 MDL ◇ | 23369 9205 ◇ |     |      |
|                 | LED 25,2W / 3000lm / 48V-DC |                        | L1214mm | 424 642 12 92 MDL ◇ | 23370 9205 ◇ |     |      |


\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ●

|                          | X    |
|--------------------------|------|
| DOT.COM L WALLWASH L210  | 0,5  |
| DOT.COM L WALLWASH L614  | 0,25 |
| DOT.COM L WALLWASH L814  | 0,33 |
| DOT.COM L WALLWASH L1214 | 0,5  |

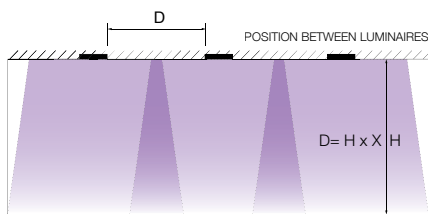

example: H=3000 mm → D= 3000 mm x 0,5 = 1500 mm

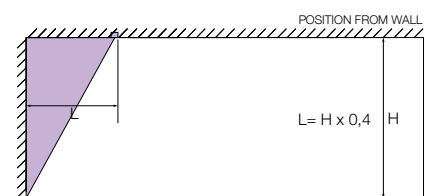

example: H=3000 mm → L= 3000 mm x 0,4 = 1200 mm

MDL MODULES STANDARD  
ON UPPER CONDUCTORS.ON REQUEST AVAILABLE  
ON LOWER CONDUCTORS  
FOR SECOND CIRCUIT

## FINISH YOUR SPECIFICATION

## REQUIREMENT / OPTION / ACCESSORY

| ON LOWER CONDUCTORS<br>FOR SECOND CIRCUIT                                  |               | REQUIREMENT / OPTION / ACCESSORY |                             |      |     |
|----------------------------------------------------------------------------|---------------|----------------------------------|-----------------------------|------|-----|
|                                                                            |               | LEDLINE UP                       | INFORM / LED LINE / DOT.COM |      |     |
|                                                                            |               |                                  | MDL                         | DALI |     |
| LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |               |                                  |                             |      |     |
| 1-10V DIM - 60W (PWM)                                                      | 21012 0101    | 150 x 53 x 35                    | R *                         |      |     |
| DALI - 60W (PWM)                                                           | 21012 0135    | 150 x 53 x 35                    | R *                         |      |     |
| LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |               |                                  |                             |      |     |
| NON DIM - 48V-DC - 240W                                                    | 300 89 48 240 | 114 x 63 x 125                   |                             | R *  | R * |
| MODULATOR MORE INFO TECHNICAL CHAPTER                                      |               |                                  |                             |      |     |
| MODULATOR DALI 1-10V DIM                                                   | 300 90 011    | 93 x 78 x 56                     |                             | R *  |     |
| or MODULATOR WIRELESS                                                      | 300 90 012    | 93 x 78 x 56                     |                             | R *  |     |
| or MODULATOR WIRELESS PLUG-IN                                              | 21032 0030    | 190 x 16 x 16                    |                             | R    |     |


\* REMOTE INSTALLATION

# MAGNETIC MODULES

PRO

NEW

## JUM-OH! 2R



|                 |                            |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|----------------------------|------|-----|------------------------|--------------|--------------|--------------|-----|------|
|                 |                            |      |     | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | 2x LED 2W / 232lm / 48V-DC | IP20 | 30° | 29415 9320 ◇           | 29416 9325 ◇ | 29411 9320 ◇ | 29412 9325 ◇ |     |      |
| 2700K<br>CRI>90 | 2x LED 2W / 221lm / 48V-DC |      |     | 29415 9220 ◇           | 29416 9225 ◇ | 29411 9220 ◇ | 29412 9225 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE


◇ B ●



A

NEW


## JUM-OH! 4R



|                 |                            |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|----------------------------|------|-----|------------------------|--------------|--------------|--------------|-----|------|
|                 |                            |      |     | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | 4x LED 2W / 232lm / 48V-DC | IP20 | 30° | 29417 9320 ◇           | 29418 9325 ◇ | 29413 9320 ◇ | 29414 9325 ◇ |     |      |
| 2700K<br>CRI>90 | 4x LED 2W / 221lm / 48V-DC |      |     | 29417 9220 ◇           | 29418 9225 ◇ | 29413 9220 ◇ | 29414 9225 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ●



0-45° 360°

NEW

## OBIN

|                 |                             |      |     |              |              |  |  |  |  |
|-----------------|-----------------------------|------|-----|--------------|--------------|--|--|--|--|
| 3000K<br>CRI>90 | LED 11.6W / 1524lm/ 48V-DC  | IP20 | 24° | 30513 9320 ◇ | 30514 9325 ◇ |  |  |  |  |
|                 |                             |      | 36° | 30513 9330 ◇ | 30514 9335 ◇ |  |  |  |  |
| 2700K<br>CRI>90 | LED 11.6W / 1458lm / 48V-DC |      | 24° | 30513 9220 ◇ | 30514 9225 ◇ |  |  |  |  |
|                 |                             |      | 36° | 30513 9230 ◇ | 30514 9235 ◇ |  |  |  |  |

\* MDL MODULES NOT FOR M26H + SBL PROFILE


◇ B ● / BRA ● / BRG ● / BROB ● / BRAT ● / W ○





NEW

## BOXY R




|                                                    |                            | M20 / M26H / M26H+SBL*                     |      | M26L |              | M52          |      |
|----------------------------------------------------|----------------------------|--------------------------------------------|------|------|--------------|--------------|------|
|                                                    |                            | MDL                                        | DALI | MDL  | DALI **      | MDL          | DALI |
| 3000K<br>CRI>90                                    | LED 8,6W / 1089lm / 48V-DC | IP20                                       | 33°  |      | 10729 9320 ◇ | 10731 9325 ◇ |      |
| 2700K<br>CRI>90                                    | LED 8,6W / 1041lm / 48V-DC |                                            |      |      | 10729 9220 ◇ | 10731 9225 ◇ |      |
| 3000-1800K / CRI>90<br>LED 10,2W / 1038lm / 48V-DC |                            |                                            |      |      | 10730 9030 ◇ | 10732 9035 ◇ |      |
| 6500-2700K / CRI>90<br>LED 9W / 1087lm / 48V-DC    |                            |                                            | 45°  |      | 10733 9035 ◇ |              |      |
|                                                    |                            | ◇ B-B ●●● / B-FBR ●●● / B-FG ●●● / W-W ○○○ |      |      |              |              |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

\*\*DALI DT8 FOR TUNABLE WHITE

NEW

## BOXY L




|                                                    |                            | M20 / M26H / M26H+SBL*                     |      | M26L |              | M52          |      |
|----------------------------------------------------|----------------------------|--------------------------------------------|------|------|--------------|--------------|------|
|                                                    |                            | MDL                                        | DALI | MDL  | DALI **      | MDL          | DALI |
| 3000K<br>CRI>90                                    | LED 8,6W / 1089lm / 48V-DC | IP20                                       | 33°  |      | 10734 9320 ◇ | 10736 9325 ◇ |      |
| 2700K<br>CRI>90                                    | LED 8,6W / 1041lm / 48V-DC |                                            |      |      | 10734 9220 ◇ | 10736 9225 ◇ |      |
| 3000-1800K / CRI>90<br>LED 10,2W / 1038lm / 48V-DC |                            |                                            |      |      | 10735 9030 ◇ | 10737 9035 ◇ |      |
| 6500-2700K / CRI>90<br>LED 9W / 1087lm / 48V-DC    |                            |                                            | 45°  |      | 10738 9035 ◇ |              |      |
|                                                    |                            | ◇ B-B ●●● / B-FBR ●●● / B-FG ●●● / W-W ○○○ |      |      |              |              |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

\*\*DALI DT8 FOR TUNABLE WHITE

NEW

## BOXY L A



|                                                    |                            | M20 / M26H / M26H+SBL*                     |      | M26L |              | M52          |      |
|----------------------------------------------------|----------------------------|--------------------------------------------|------|------|--------------|--------------|------|
|                                                    |                            | MDL                                        | DALI | MDL  | DALI **      | MDL          | DALI |
| 3000K<br>CRI>90                                    | LED 8,6W / 1089lm / 48V-DC | IP20                                       | 33°  |      | 10739 9320 ◇ | 10741 9325 ◇ |      |
| 2700K<br>CRI>90                                    | LED 8,6W / 1041lm / 48V-DC |                                            |      |      | 10739 9220 ◇ | 10741 9225 ◇ |      |
| 3000-1800K / CRI>90<br>LED 10,2W / 1038lm / 48V-DC |                            |                                            |      |      | 10740 9030 ◇ | 10742 9035 ◇ |      |
| 6500-2700K / CRI>90<br>LED 9W / 1087lm / 48V-DC    |                            |                                            | 45°  |      | 10743 9035 ◇ |              |      |
|                                                    |                            | ◇ B-B ●●● / B-FBR ●●● / B-FG ●●● / W-W ○○○ |      |      |              |              |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

\*\*DALI DT8 FOR TUNABLE WHITE

MDL MODULES STANDARD  
ON UPPER CONDUCTORS.ON REQUEST AVAILABLE  
ON LOWER CONDUCTORS  
FOR SECOND CIRCUIT

## FINISH YOUR SPECIFICATION

## REQUIREMENT / OPTION / ACCESSORY

|                                                                            |  | JUM-OH1                          |                | OBIN |      | BOXY |      |
|----------------------------------------------------------------------------|--|----------------------------------|----------------|------|------|------|------|
|                                                                            |  | MDL                              | DALI           | MDL  | DALI | MDL  | DALI |
| LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |  |                                  |                |      |      |      |      |
| NON DIM - 48V-DC - 240W                                                    |  | 300 89 48 240                    | 114 x 63 x 125 | R *  | R *  | R *  | R *  |
| MODULATOR MORE INFO TECHNICAL CHAPTER                                      |  |                                  |                |      |      |      |      |
| MODULATOR DALI 1-10V DIM                                                   |  | 300 90 011                       | 93 x 78 x 56   | R *  | R *  | R *  | R *  |
| or MODULATOR WIRELESS                                                      |  | 300 90 012                       | 93 x 78 x 56   | R *  | R *  | R *  | R *  |
| or MODULATOR WIRELESS PLUG-IN                                              |  | 21032 0030                       | 190 x 16 x 16  | R    | R    | R    | R    |
| FINISH                                                                     |  |                                  |                |      |      |      |      |
| SPY 90 TUBE                                                                |  | 19810 0170 B / FBR / FG / GC / W |                | R    | R    |      |      |
| HONEYCOMB / LENS / GLASS                                                   |  |                                  |                |      |      |      |      |
| BOXY HONEYCOMB                                                             |  | 251 70 03 01 B / W               |                |      |      | A    | A    |
| HONEYCOMB 75                                                               |  | 19810 0110 B                     |                | A    | A    |      |      |
| BOXY SOFTENING LENS                                                        |  | 251 70 03 04 B / W               |                |      |      | A    | A    |
| BOXY GLASS SBL                                                             |  | 251 70 03 05 B / W               |                |      |      | A    | A    |

\* REMOTE INSTALLATION


PRO

PROFILES

B

# MAGNETIC MODULES

PRO




## 1 LED

|                |                         |      |     | M20 / M26H |      | M26L |      | M52              |            |
|----------------|-------------------------|------|-----|------------|------|------|------|------------------|------------|
|                |                         |      |     | MDL        | DALI | MDL  | DALI | MDL              | DALI       |
| 3000K / CRI>80 | LED 6W / 558lm / 48V-DC | IP20 | 20° |            |      |      |      | 421 218 1832 MDL | 24414 8325 |
| 2700K / CRI>80 | LED 6W / 558lm / 48V-DC |      |     |            |      |      |      | 421 218 1822 MDL | 24414 8225 |




A



## 2 LED


|                |                             |      |     | M20 / M26H |      | M26L |      | M52              |            |
|----------------|-----------------------------|------|-----|------------|------|------|------|------------------|------------|
|                |                             |      |     | MDL        | DALI | MDL  | DALI | MDL              | DALI       |
| 3000K / CRI>80 | 2 x LED 6W / 558lm / 48V-DC | IP20 | 20° |            |      |      |      | 421 218 2832 MDL | 24417 8325 |
| 2700K / CRI>80 | 2 x LED 6W / 558lm / 48V-DC |      |     |            |      |      |      | 421 218 2822 MDL | 24417 8225 |




## 2 LED OK

|                |                             |      |     | M20 / M26H |      | M26L |      | M52              |            |
|----------------|-----------------------------|------|-----|------------|------|------|------|------------------|------------|
|                |                             |      |     | MDL        | DALI | MDL  | DALI | MDL              | DALI       |
| 3000K / CRI>80 | 2 x LED 6W / 558lm / 48V-DC | IP20 | 20° |            |      |      |      | 421 248 2832 MDL | 24419 8325 |
| 2700K / CRI>80 | 2 x LED 6W / 558lm / 48V-DC |      |     |            |      |      |      | 421 248 2822 MDL | 24419 8225 |



**1 LED D**

|                 |                           |      |     | <b>M20 / M26H</b> |      | <b>M26L</b> |      | <b>M52</b>                   |                   |
|-----------------|---------------------------|------|-----|-------------------|------|-------------|------|------------------------------|-------------------|
|                 |                           |      |     | MDL               | DALI | MDL         | DALI | MDL                          | DALI              |
| 3000K<br>CRI>90 | LED 7.1W / 812lm / 48V-DC | IP20 | 33° |                   |      |             |      | <b>421 228 811 932 D MDL</b> | <b>24415 9325</b> |
| 2700K<br>CRI>90 | LED 7.1W / 779lm / 48V-DC |      |     |                   |      |             |      | <b>421 228 811 922 D MDL</b> | <b>24415 9225</b> |

**2 LED D**


|                 |                               |      |     | <b>M20 / M26H</b> |      | <b>M26L</b> |      | <b>M52</b>                   |                   |
|-----------------|-------------------------------|------|-----|-------------------|------|-------------|------|------------------------------|-------------------|
|                 |                               |      |     | MDL               | DALI | MDL         | DALI | MDL                          | DALI              |
| 3000K<br>CRI>90 | 2 x LED 7.1W / 812lm / 48V-DC | IP20 | 33° |                   |      |             |      | <b>421 228 812 932 D MDL</b> | <b>24418 9325</b> |
| 2700K<br>CRI>90 | 2 x LED 7.1W / 779lm / 48V-DC |      |     |                   |      |             |      | <b>421 228 812 922 D MDL</b> | <b>24418 9225</b> |

MDL MODULES STANDARD  
ON UPPER CONDUCTORS.ON REQUEST AVAILABLE  
ON LOWER CONDUCTORS  
FOR SECOND CIRCUIT**FINISH YOUR SPECIFICATION****REQUIREMENT / OPTION / ACCESSORY**

|                                                                                   |  |  |  | 1 LED / 2 LED        |      |
|-----------------------------------------------------------------------------------|--|--|--|----------------------|------|
|                                                                                   |  |  |  | MDL                  | DALI |
| <b>LED POWER SUPPLY 48V-DC</b> MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |  |  |  |                      |      |
| NON DIM - 48V-DC - 240W                                                           |  |  |  | <b>300 89 48 240</b> |      |
|                                                                                   |  |  |  | 114 x 63 x 125       |      |
|                                                                                   |  |  |  | R *                  | R *  |
| <b>MODULATOR</b> MORE INFO TECHNICAL CHAPTER                                      |  |  |  |                      |      |
| MODULATOR DALI 1-10V DIM                                                          |  |  |  | <b>300 90 011</b>    |      |
|                                                                                   |  |  |  | 93 x 78 x 56         |      |
| or MODULATOR WIRELESS                                                             |  |  |  | <b>300 90 012</b>    |      |
|                                                                                   |  |  |  | 93 x 78 x 56         |      |
| or MODULATOR WIRELESS PLUG-IN                                                     |  |  |  | <b>21032 0030</b>    |      |
|                                                                                   |  |  |  | 190 x 16 x 16        |      |
|                                                                                   |  |  |  | R                    |      |

\* REMOTE INSTALLATION

# MAGNETIC MODULES



**BOWIE 1**


| BOWIE 1         |                            |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|----------------------------|------|-----|------------------------|--------------|--------------|--------------|-----|------|
|                 |                            |      |     | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | LED 8.6W / 1018lm / 48V-DC | IP20 | 25° | 26716 9320 ◇           | 26717 9325 ◇ | 26720 9320 ◇ | 26721 9325 ◇ |     |      |
|                 |                            |      | 37° | 26716 9330 ◇           | 26717 9335 ◇ | 26720 9330 ◇ | 26721 9335 ◇ |     |      |
| 2700K<br>CRI>90 | LED 8.6W / 974lm / 48V-DC  |      | 25° | 26716 9220 ◇           | 26717 9225 ◇ | 26720 9220 ◇ | 26721 9225 ◇ |     |      |
|                 |                            |      | 37° | 26716 9230 ◇           | 26717 9235 ◇ | 26720 9230 ◇ | 26721 9235 ◇ |     |      |

\*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○




**BOWIE 2**

| BOWIE 2         |                                |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |  |
|-----------------|--------------------------------|------|-----|------------------------|--------------|--------------|--------------|-----|--|
|                 |                                |      |     | MDL                    |              | DALI         |              | MDL |  |
| 3000K<br>CRI>90 | 2 x LED 8.6W / 1018lm / 48V-DC | IP20 | 25° | 26718 9320 ◇           | 26719 9325 ◇ | 26722 9320 ◇ | 26723 9325 ◇ |     |  |
|                 |                                |      | 37° | 26718 9330 ◇           | 26719 9335 ◇ | 26722 9330 ◇ | 26723 9335 ◇ |     |  |
| 2700K<br>CRI>90 | 2 x LED 8.6W / 974lm / 48V-DC  |      | 25° | 26718 9220 ◇           | 26719 9225 ◇ | 26722 9220 ◇ | 26723 9225 ◇ |     |  |
|                 |                                |      | 37° | 26718 9230 ◇           | 26719 9235 ◇ | 26722 9230 ◇ | 26723 9235 ◇ |     |  |
| ◇ B ● / W ○     |                                |      |     |                        |              |              |              |     |  |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○




**ODRON 1**

| ODRON 1                                 |                            |      |          | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------------------------------|----------------------------|------|----------|------------------------|--------------|--------------|--------------|-----|------|
|                                         |                            |      |          | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90                         | LED 8,6W / 1018lm / 48V-DC | IP20 | 28 & 41° | 26216 9300 ◇           | 26217 9305 ◇ | 26220 9300 ◇ | 26221 9305 ◇ |     |      |
| 2700K<br>CRI>90                         | LED 8,6W / 974lm / 48V-DC  |      | **       | 26216 9200 ◇           | 26217 9205 ◇ | 26220 9200 ◇ | 26221 9205 ◇ |     |      |
| *MDL MODULES NOT FOR M26H + SBL PROFILE |                            |      |          |                        |              | ◇ B ● / W ○  |              |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

\*\* INCL. 2 REFLECTORS

◇ B ● / W ○



**ODRON 2**


| ODRON 2                                 |                                |      |                | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------------------------------|--------------------------------|------|----------------|------------------------|--------------|--------------|--------------|-----|------|
|                                         |                                |      |                | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90                         | 2 x LED 8.6W / 1018lm / 48V-DC | IP20 | 28 & 41°<br>** | 26218 9300 ◇           | 26219 9305 ◇ | 26222 9300 ◇ | 26223 9305 ◇ |     |      |
| 2700K<br>CRI>90                         | 2 x LED 8.6W / 974lm / 48V-DC  |      |                | 26218 9200 ◇           | 26219 9205 ◇ | 26222 9200 ◇ | 26223 9205 ◇ |     |      |
| *MDL MODULES NOT FOR M26H + SBL PROFILE |                                |      |                |                        |              | ◇ B ● / W ○  |              |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

\*\* INCL. 4 REFLECTORS

◇ B ● / W ○





NEW

## NEEDLE


| NEEDLE          |                           |      |     | M20 / M26H / M26H+SBL* |              | M26L |      | M52 |      |
|-----------------|---------------------------|------|-----|------------------------|--------------|------|------|-----|------|
|                 |                           | IP20 |     | MDL                    | DALI         | MDL  | DALI | MDL | DALI |
| 3000K<br>CRI>90 | LED 8.2W / 677lm / 48V-DC |      | 13° | 25016 9310 ◇           | 25017 9315 ◇ |      |      |     |      |
|                 |                           |      | 33° | 25016 9320 ◇           | 25017 9325 ◇ |      |      |     |      |
| 2700K<br>CRI>90 | LED 8.2W / 677lm / 48V-DC |      | 13° | 25016 9210 ◇           | 25017 9215 ◇ |      |      |     |      |
|                 |                           |      | 33° | 25016 9220 ◇           | 25017 9225 ◇ |      |      |     |      |

\*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR  / FG 

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR ● / FG ●



NEW

## NEEDLE OK

| NEEDLE OK       |                           |      |     | M20 / M26H / M26H+SBL* |              | M26L |      | M52 |      |
|-----------------|---------------------------|------|-----|------------------------|--------------|------|------|-----|------|
|                 |                           | IP20 |     | MDL                    | DALI         | MDL  | DALI | MDL | DALI |
| 3000K<br>CRI>90 | LED 5.7W / 519lm / 48V-DC |      | 13° | 25018 9310 ◇           | 25019 9315 ◇ |      |      |     |      |
|                 |                           |      | 33° | 25018 9320 ◇           | 25019 9325 ◇ |      |      |     |      |
| 2700K<br>CRI>90 | LED 5.7W / 519lm / 48V-DC |      | 13° | 25018 9210 ◇           | 25019 9215 ◇ |      |      |     |      |
|                 |                           |      | 33° | 25018 9220 ◇           | 25019 9225 ◇ |      |      |     |      |

\*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR ● / FG ●

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR ● / FG ●

MDL MODULES STANDARD  
ON UPPER CONDUCTORS.ON REQUEST AVAILABLE  
ON LOWER CONDUCTORS  
FOR SECOND CIRCUIT

## FINISH YOUR SPECIFICATION

## REQUIREMENT / OPTION / ACCESSORY

|                                                                            |  |               |                | BOWIE |      | ODRON |      | NEEDLE |      |
|----------------------------------------------------------------------------|--|---------------|----------------|-------|------|-------|------|--------|------|
|                                                                            |  |               |                | MDL   | DALI | MDL   | DALI | MDL    | DALI |
| LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |  |               |                |       |      |       |      |        |      |
| NON DIM - 48V-DC - 240W                                                    |  | 300 89 48 240 | 114 x 63 x 125 | R *   | R *  | R *   | R *  | R *    | R *  |
| MODULATOR MORE INFO TECHNICAL CHAPTER                                      |  |               |                |       |      |       |      |        |      |
| MODULATOR DALI 1-10V DIM                                                   |  | 300 90 011    | 93 x 78 x 56   | R *   |      | R *   |      | R *    |      |
| or MODULATOR WIRELESS                                                      |  | 300 90 012    | 93 x 78 x 56   | R *   |      | R *   |      | R *    |      |
| or MODULATOR WIRELESS PLUG-IN                                              |  | 21032 0030    | 190 x 16 x 16  | R     |      | R     |      | R      |      |
| FINISH                                                                     |  |               |                |       |      |       |      |        |      |
| ODRON COVER                                                                |  | 26210 0020 GC |                |       |      | A     | A    |        |      |


\* REMOTE INSTALLATION

PRO

PROFILES

B

# MAGNETIC MODULES



## MULTINOVA 30

\*\*  
UGR  
<19

### M20 / M26H / M26H+SBL\*

### M26L

### M52


|                  |                                                            |           | MDL          | DALI ***     | MDL          | DALI ***     | MDL | DALI |
|------------------|------------------------------------------------------------|-----------|--------------|--------------|--------------|--------------|-----|------|
| 3000K<br>CRI>90  | LED 14,8W / 2148lm / 48V-DC<br>IP20                        | SBL       | 27947 9300 ◇ | 27948 9305 ◇ | 27938 9300 ◇ | 27939 9305 ◇ |     |      |
|                  |                                                            | PRISMATIC | 27949 9300 ◇ | 27950 9305 ◇ | 27940 9300 ◇ | 27941 9305 ◇ |     |      |
|                  |                                                            | SMOKE     | 27951 9300 ◇ | 27952 9305 ◇ | 27942 9300 ◇ | 27943 9305 ◇ |     |      |
| SOFT DIM         | 3000-1800K / CRI>90<br>LED 14,8W / 2148lm / 48V-DC<br>IP20 | SBL       |              | 27955 9005 ◇ |              | 27946 9005 ◇ |     |      |
|                  |                                                            | PRISMATIC |              |              |              |              |     |      |
|                  |                                                            | SMOKE     |              |              |              |              |     |      |
| TUNABLE<br>WHITE | 6500-2700K / CRI>90<br>LED 9,4W / 1367lm / 48V-DC<br>IP20  | SBL       |              | 27953 9005 ◇ |              | 27944 9005 ◇ |     |      |
|                  |                                                            | PRISMATIC |              | 27954 9005 ◇ |              | 27945 9005 ◇ |     |      |
|                  |                                                            | SMOKE     |              |              |              |              |     |      |

\* M26H+SBL: NOT FOR MDL LUMINAIRES

\*\* FOR PRISMATIC

\*\*\* DALI DT8 FOR TUNABLE WHITE

◇ B ● / GC ● / W ○ (for prismatic: ◇ B ● / W ○)



## HALOSCAN MP

### M20 / M26H / M26H+SBL\*


### M26L

### M52

|                   |                                                |     | MDL          | DALI         | MDL          | DALI         | MDL | DALI |
|-------------------|------------------------------------------------|-----|--------------|--------------|--------------|--------------|-----|------|
| 3000K /<br>CRI>90 | LED 8,6W / 1089lm / 48V-DC                     | 14° | 23135 9310 ◇ | 23136 9315 ◇ | 23123 9310 ◇ | 23124 9315 ◇ |     |      |
|                   |                                                | 21° | 23135 9320 ◇ | 23136 9325 ◇ | 23123 9320 ◇ | 23124 9325 ◇ |     |      |
|                   |                                                | 35° | 23135 9330 ◇ | 23136 9335 ◇ | 23123 9330 ◇ | 23124 9335 ◇ |     |      |
| 2700K /<br>CRI>90 | LED 8,6W / 1041lm / 48V-DC                     | 14° | 23135 9210 ◇ | 23136 9215 ◇ | 23123 9210 ◇ | 23124 9215 ◇ |     |      |
|                   |                                                | 21° | 23135 9220 ◇ | 23136 9225 ◇ | 23123 9220 ◇ | 23124 9225 ◇ |     |      |
|                   |                                                | 35° | 23135 9230 ◇ | 23136 9235 ◇ | 23123 9230 ◇ | 23124 9235 ◇ |     |      |
| SOFT DIM          | 3000-1800K / CRI>90<br>LED 6W / 623lm / 48V-DC | 14° | 23137 9010 ◇ | 23138 9015 ◇ | 23125 9010 ◇ | 23126 9015 ◇ |     |      |
|                   |                                                | 21° | 23137 9020 ◇ | 23138 9025 ◇ | 23125 9020 ◇ | 23126 9025 ◇ |     |      |
|                   |                                                | 35° | 23137 9030 ◇ | 23138 9035 ◇ | 23125 9030 ◇ | 23126 9035 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○



## HALOSCAN HP

### M20 / M26H / M26H+SBL\*

### M26L


### M52

|                   |                                                    |     | MDL          | DALI         | MDL          | DALI         | MDL | DALI |
|-------------------|----------------------------------------------------|-----|--------------|--------------|--------------|--------------|-----|------|
| 3000K /<br>CRI>90 | LED 11,6W / 1524lm / 48V-DC                        | 14° | 23141 9310 ◇ | 23142 9315 ◇ | 23129 9310 ◇ | 23130 9315 ◇ |     |      |
|                   |                                                    | 21° | 23141 9320 ◇ | 23142 9325 ◇ | 23129 9320 ◇ | 23130 9325 ◇ |     |      |
|                   |                                                    | 35° | 23141 9330 ◇ | 23142 9335 ◇ | 23129 9330 ◇ | 23130 9335 ◇ |     |      |
| 2700K /<br>CRI>90 | LED 11,6W / 1458lm / 48V-DC                        | 14° | 23141 9210 ◇ | 23142 9215 ◇ | 23129 9210 ◇ | 23130 9215 ◇ |     |      |
|                   |                                                    | 21° | 23141 9220 ◇ | 23142 9225 ◇ | 23129 9220 ◇ | 23130 9225 ◇ |     |      |
|                   |                                                    | 35° | 23141 9230 ◇ | 23142 9235 ◇ | 23129 9230 ◇ | 23130 9235 ◇ |     |      |
| SOFT DIM          | 3000-1800K / CRI>90<br>LED 11,8W / 1307lm / 48V-DC | 14° | 23143 9010 ◇ | 23144 9015 ◇ | 23131 9010 ◇ | 23132 9015 ◇ |     |      |
|                   |                                                    | 21° | 23143 9020 ◇ | 23144 9025 ◇ | 23131 9020 ◇ | 23132 9025 ◇ |     |      |
|                   |                                                    | 35° | 23143 9030 ◇ | 23144 9035 ◇ | 23131 9030 ◇ | 23132 9035 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○






## PUNK 39

| PUNK 39                                  |                           |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|------------------------------------------|---------------------------|------|-----|------------------------|--------------|--------------|--------------|-----|------|
|                                          |                           |      |     | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90                          | LED 7.1W / 812lm / 48V-DC | IP20 | 45° | 471 151 811 931 MDL ◇  | 23372 9315 ◇ | 23244 9310 ◇ | 23245 9315 ◇ |     |      |
| 2700K<br>CRI>90                          | LED 7.1W / 779lm / 48V-DC |      |     | 471 151 811 921 MDL ◇  | 23372 9215 ◇ | 23244 9210 ◇ | 23245 9215 ◇ |     |      |
| * MDL MODULES NOT FOR M26H + SBL PROFILE |                           |      |     |                        |              | ◇ B ●        |              |     |      |


\* MDL MODULES NOT FOR M26H + SBL PROFILE



**M - OCTAV 27**

| M - OCTAV 27                             |                           |      |     | M20 / M26H / M26H+SBL* |              | M26L                              |              | M52 |      |
|------------------------------------------|---------------------------|------|-----|------------------------|--------------|-----------------------------------|--------------|-----|------|
|                                          |                           |      |     | MDL                    | DALI         | MDL                               | DALI         | MDL | DALI |
| 3000K<br>CRI>90                          | LED 5,8W / 787lm / 48V-DC | IP20 | 30° | 29012 9320 ◇           | 29014 9325 ◇ | 29013 9320 ◇                      | 29015 9325 ◇ |     |      |
| 2700K<br>CRI>90                          | LED 5,8W / 753lm / 48V-DC |      |     | 29012 9220 ◇           | 29014 9225 ◇ | 29013 9220 ◇                      | 29015 9225 ◇ |     |      |
| * MDL MODULES NOT FOR M26H + SBL PROFILE |                           |      |     |                        |              | ◇ B ● / FBR ● / FG ● / GC ● / W ○ |              |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE



**M - OCTAV 39**

| M - OCTAV 39                             |                            |      |     | M20 / M26H / M26H+SBL* |              | M26L                              |              | M52 |      |
|------------------------------------------|----------------------------|------|-----|------------------------|--------------|-----------------------------------|--------------|-----|------|
|                                          |                            |      |     | MDL                    | DALI         | MDL                               | DALI         | MDL | DALI |
| 3000K<br>CRI>90                          | LED 8.6W / 1089lm / 48V-DC | IP20 | 20° | 29020 9320 ◇           | 29022 9325 ◇ | 29021 9320 ◇                      | 29023 9325 ◇ |     |      |
|                                          |                            |      | 40° | 29020 9330 ◇           | 29022 9335 ◇ | 29021 9330 ◇                      | 29023 9335 ◇ |     |      |
| 2700K<br>CRI>90                          | LED 8.6W / 1041lm / 48V-DC |      | 20° | 29020 9220 ◇           | 29022 9225 ◇ | 29021 9220 ◇                      | 29023 9225 ◇ |     |      |
|                                          |                            |      | 40° | 29020 9230 ◇           | 29022 9235 ◇ | 29021 9230 ◇                      | 29023 9235 ◇ |     |      |
| * MDL MODULES NOT FOR M26H + SBL PROFILE |                            |      |     |                        |              | ◇ B ● / FBR ● / FG ● / GC ● / W ○ |              |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

MDL MODULES STANDARD  
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE  
ON LOWER CONDUCTORS  
FOR SECOND CIRCUIT

## FINISH YOUR SPECIFICATION

**REQUIREMENT / OPTION / ACCESSORY**

| MULTINOVA |      | HALOSCAN MP |      | HALOSCAN HP |      | PUNK |      | OCTAV 27 |      | OCTAV 39 |      |
|-----------|------|-------------|------|-------------|------|------|------|----------|------|----------|------|
| MDL       | DALI | MDL         | DALI | MDL         | DALI | MDL  | DALI | MDL      | DALI | MDL      | DALI |
|           |      |             |      |             |      |      |      |          |      |          |      |

**LED POWER SUPPLY 48V-DC** MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

[illegible]

**MODULATOR** [MORE INFO](#) [TECHNICAL CHAPTER](#)

|                               |                   |               |     |  |     |     |  |     |  |     |  |
|-------------------------------|-------------------|---------------|-----|--|-----|-----|--|-----|--|-----|--|
| MODULATOR DALI 1-10V DIM      | <b>300 90 011</b> | 93 x 78 x 56  | R * |  | R * | R * |  | R * |  | R * |  |
| or MODULATOR WIRELESS         | <b>300 90 012</b> | 93 x 78 x 56  | R * |  | R * | R * |  | R * |  | R * |  |
| or MODULATOR WIRELESS PLUG-IN | <b>21032 0030</b> | 190 x 16 x 16 | R   |  | R   | R   |  | R   |  | R   |  |

## FINISH

[illegible]

HONEYCOMB / LENS / GLASS

[illegible]


\* REMOTE INSTALLATION

PRO

## PROFILES

B

# MAGNETIC MODULES




**SPY 271**

|                 |                           |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|---------------------------|------|-----|------------------------|--------------|--------------|--------------|-----|------|
|                 |                           |      |     | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | LED 5.8W / 787lm / 48V-DC | IP20 | 30° | 23311 9320 ◇           | 23312 9325 ◇ | 23210 9320 ◇ | 23211 9325 ◇ |     |      |
| 2700K<br>CRI>90 | LED 5.8W / 753lm / 48V-DC |      |     | 23311 9220 ◇           | 23312 9225 ◇ | 23210 9220 ◇ | 23211 9225 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○




**SPY 271 L**

|                 |                           |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|---------------------------|------|-----|------------------------|--------------|--------------|--------------|-----|------|
|                 |                           |      |     | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | LED 5.8W / 787lm / 48V-DC | IP20 | 30° | 23385 9320 ◇           | 23386 9325 ◇ | 23280 9320 ◇ | 23281 9325 ◇ |     |      |
| 2700K<br>CRI>90 | LED 5.8W / 753lm / 48V-DC |      |     | 23385 9220 ◇           | 23386 9225 ◇ | 23280 9220 ◇ | 23281 9225 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○




**SPY 272**

|                 |                              |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|------------------------------|------|-----|------------------------|--------------|--------------|--------------|-----|------|
|                 |                              |      |     | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | 2x LED 5.8W / 787lm / 48V-DC | IP20 | 30° | 23313 9320 ◇           | 23314 9325 ◇ | 23212 9320 ◇ | 23213 9325 ◇ |     |      |
| 2700K<br>CRI>90 | 2x LED 5.8W / 753lm / 48V-DC |      |     | 23313 9220 ◇           | 23314 9225 ◇ | 23212 9220 ◇ | 23213 9225 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○




**SPY 272 L**

|                 |                              |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|------------------------------|------|-----|------------------------|--------------|--------------|--------------|-----|------|
|                 |                              |      |     | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | 2x LED 5.8W / 787lm / 48V-DC | IP20 | 30° | 23387 9320 ◇           | 23388 9325 ◇ | 23282 9320 ◇ | 23283 9325 ◇ |     |      |
| 2700K<br>CRI>90 | 2x LED 5.8W / 753lm / 48V-DC |      |     | 23387 9220 ◇           | 23388 9225 ◇ | 23282 9220 ◇ | 23283 9225 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○






## SPY 391

| SPY 391         |                            |      |     | M20 / M26H / M26H+SBL* |                | M26L           |                | M52          |              |      |  |
|-----------------|----------------------------|------|-----|------------------------|----------------|----------------|----------------|--------------|--------------|------|--|
|                 |                            |      |     | MDL                    |                | DALI           |                | MDL          |              | DALI |  |
| 3000K<br>CRI>90 | LED 8.6W / 1089lm / 48V-DC | IP20 | 20° | 23315 9320 ◇**         | 23316 9325 ◇** | 23258 9320 ◇** | 23259 9325 ◇** | 24430 9320 ◇ | 24431 9325 ◇ |      |  |
|                 |                            |      | 40° | 23315 9330 ◇**         | 23316 9335 ◇** | 23258 9330 ◇** | 23259 9335 ◇** | 24430 9330 ◇ | 24431 9335 ◇ |      |  |
| 2700K<br>CRI>90 | LED 8.6W / 1041lm / 48V-DC |      | 20° | 23315 9220 ◇**         | 23316 9225 ◇** | 23258 9220 ◇** | 23259 9225 ◇** | 24430 9220 ◇ | 24431 9225 ◇ |      |  |
|                 |                            |      | 40° | 23315 9230 ◇**         | 23316 9235 ◇** | 23258 9230 ◇** | 23259 9235 ◇** | 24430 9230 ◇ | 24431 9235 ◇ |      |  |

\*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ●

\*\* + NEW COLOURS: BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ●




## SPY 391 L

| SPY 391 L       |                            |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52          |              |      |  |
|-----------------|----------------------------|------|-----|------------------------|--------------|--------------|--------------|--------------|--------------|------|--|
|                 |                            |      |     | MDL                    |              | DALI         |              | MDL          |              | DALI |  |
| 3000K<br>CRI>90 | LED 8.6W / 1089lm / 48V-DC | IP20 | 20° | 23389 9320 ◇           | 23390 9325 ◇ | 23284 9320 ◇ | 23285 9325 ◇ | 24440 9320 ◇ | 24441 9325 ◇ |      |  |
|                 |                            |      | 40° | 23389 9330 ◇           | 23390 9335 ◇ | 23284 9330 ◇ | 23285 9335 ◇ | 24440 9330 ◇ | 24441 9335 ◇ |      |  |
| 2700K<br>CRI>90 | LED 8.6W / 1041lm / 48V-DC |      | 20° | 23389 9220 ◇           | 23390 9225 ◇ | 23284 9220 ◇ | 23285 9225 ◇ | 24440 9220 ◇ | 24441 9225 ◇ |      |  |
|                 |                            |      | 40° | 23389 9230 ◇           | 23390 9235 ◇ | 23284 9230 ◇ | 23285 9235 ◇ | 24440 9230 ◇ | 24441 9235 ◇ |      |  |

\*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ●



## SPY 392

| SPY 392         |                               |      |     | M20 / M26H   |              | M26L         |              | M52 |      |
|-----------------|-------------------------------|------|-----|--------------|--------------|--------------|--------------|-----|------|
|                 |                               |      |     | MDL          | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | 2x LED 8.6W / 1089lm / 48V-DC | IP20 | 20° | 23317 9320 ◇ | 23318 9325 ◇ | 23260 9320 ◇ | 23261 9325 ◇ |     |      |
|                 |                               |      | 40° | 23317 9330 ◇ | 23318 9335 ◇ | 23260 9330 ◇ | 23261 9335 ◇ |     |      |
| 2700K<br>CRI>90 | 2x LED 8.6W / 1041lm / 48V-DC |      | 20° | 23317 9220 ◇ | 23318 9225 ◇ | 23260 9220 ◇ | 23261 9225 ◇ |     |      |
|                 |                               |      | 40° | 23317 9230 ◇ | 23318 9235 ◇ | 23260 9230 ◇ | 23261 9235 ◇ |     |      |

◇ B ● / W ●

MDL MODULES STANDARD  
ON UPPER CONDUCTORS.ON REQUEST AVAILABLE  
ON LOWER CONDUCTORS  
FOR SECOND CIRCUIT


## FINISH YOUR SPECIFICATION

## REQUIREMENT / OPTION / ACCESSORY

|                                                                            |  | SPY 271/272 - 271 L/272 L        |                | SPY 391/392 |      | SPY 391 L |      |
|----------------------------------------------------------------------------|--|----------------------------------|----------------|-------------|------|-----------|------|
|                                                                            |  | MDL                              | DALI           | MDL         | DALI | MDL       | DALI |
| LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |  |                                  |                |             |      |           |      |
| NON DIM - 48V-DC - 240W                                                    |  | 300 89 48 240                    | 114 x 63 x 125 | R *         | R *  | R *       | R *  |
| MODULATOR MORE INFO TECHNICAL CHAPTER                                      |  |                                  |                |             |      |           |      |
| MODULATOR DALI 1-10V DIM                                                   |  | 300 90 011                       | 93 x 78 x 56   | R *         |      |           | R *  |
| or MODULATOR WIRELESS                                                      |  | 300 90 012                       | 93 x 78 x 56   | R *         |      |           | R *  |
| or MODULATOR WIRELESS PLUG-IN                                              |  | 21032 0030                       | 190 x 16 x 16  | R           |      |           | R    |
| FINISH                                                                     |  |                                  |                |             |      |           |      |
| SPY 39 TUBE                                                                |  | 24144 0010 B / FBR / FG / GC / W |                |             | R    | R         |      |
| SPY 39 L TUBE                                                              |  | 24144 0020 B / FBR / FG / GC / W |                |             |      |           | R    |
| VISOR 27                                                                   |  | 216 12 01                        | A              | A           |      |           |      |
| VISOR 39                                                                   |  | 216 12 02                        |                |             | A    | A         | A    |

\* REMOTE INSTALLATION

# MAGNETIC MODULES




## SPY 52

| M20 / M26H / M26H+SBL                                              |              | M26L         |              | M52          |              |
|--------------------------------------------------------------------|--------------|--------------|--------------|--------------|--------------|
| MDL                                                                | DALI **      | MDL          | DALI **      | MDL          | DALI **      |
|                                                                    |              |              |              |              |              |
| 23323 9320 ◇                                                       | 23324 9325 ◇ | 23274 9320 ◇ | 23275 9325 ◇ | 24434 9320 ◇ | 24435 9325 ◇ |
| 23323 9330 ◇                                                       | 23324 9335 ◇ | 23274 9330 ◇ | 23275 9335 ◇ | 24434 9330 ◇ | 24435 9335 ◇ |
| 23323 9220 ◇                                                       | 23324 9225 ◇ | 23274 9220 ◇ | 23275 9225 ◇ | 24434 9220 ◇ | 24435 9225 ◇ |
| 23323 9230 ◇                                                       | 23324 9235 ◇ | 23274 9230 ◇ | 23275 9235 ◇ | 24434 9230 ◇ | 24435 9235 ◇ |
| 23398 9020 ◇                                                       | 23399 9025 ◇ | 23297 9020 ◇ | 23298 9025 ◇ | 24451 9020 ◇ | 24452 9025 ◇ |
| 23398 9030 ◇                                                       | 23399 9035 ◇ | 23297 9030 ◇ | 23298 9035 ◇ | 24451 9030 ◇ | 24452 9035 ◇ |
|                                                                    | 23331 9025 ◇ |              | 23215 9025 ◇ |              | 24445 9025 ◇ |
|                                                                    | 23331 9035 ◇ |              | 23215 9035 ◇ |              | 24445 9035 ◇ |
| ◇ B ● / FBR ● / FG ● / GC ● / W ○ (for tunable white: ◇ B ● / W ○) |              |              |              |              |              |

\* MDL MODULES NOT FOR M26H + SBL PROFILE  
\*\* TUNABLE WHITE DALI DT8

◇ B ● / FBR ● / FG ● / GC ● / W ○ (for tunable white: ◇ B ● / W ○)




## SPY 52 WALLWASH

| M20 / M26H / M26H+SBL* |                            | M26L         |              | M52          |              |
|------------------------|----------------------------|--------------|--------------|--------------|--------------|
| MDL                    | DALI                       | MDL          | DALI         | MDL          | DALI         |
| 3000K CRI>90           | LED 8.6W / 1089lm / 48V-DC | 19889 9300 ◇ | 19890 9305 ◇ | 19887 9300 ◇ | 19888 9305 ◇ |
| 2700K CRI>90           | LED 8.6W / 1041lm / 48V-DC | 19889 9200 ◇ | 19890 9205 ◇ | 19887 9200 ◇ | 19888 9205 ◇ |
| NEW                    | SOFT DIM                   | 19894 9000 ◇ | 19895 9005 ◇ | 19892 9000 ◇ | 19893 9005 ◇ |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○




## SPY 52 FOCUS

| M20 / M26H / M26H+SBL* |                             | M26L         |              | M52          |              |
|------------------------|-----------------------------|--------------|--------------|--------------|--------------|
| MDL                    | DALI                        | MDL          | DALI         | MDL          | DALI         |
| 3000K CRI>90           | LED 12.4W / 1467lm / 48V-DC | 23411 9300 ◇ | 23412 9305 ◇ | 23293 9300 ◇ | 23294 9305 ◇ |
| 2700K CRI>90           | LED 12.4W / 1403lm / 48V-DC | 23411 9200 ◇ | 23412 9205 ◇ | 23293 9200 ◇ | 23294 9205 ◇ |
| NEW                    | SOFT DIM                    | 23413 9000 ◇ | 23414 9005 ◇ | 23295 9000 ◇ | 23296 9005 ◇ |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○






## SPY 66

|                 |                                                 |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52          |              |
|-----------------|-------------------------------------------------|------|-----|------------------------|--------------|--------------|--------------|--------------|--------------|
|                 |                                                 |      |     | MDL                    | DALI**       | MDL          | DALI**       | MDL          | DALI**       |
| 3000K<br>CRI>90 | LED 25W / 2811lm / ' / 48V-DC                   | IP20 | 18° | 23327 9310 ◇           | 23328 9315 ◇ | 23278 9310 ◇ | 23279 9315 ◇ | 24438 9310 ◇ | 24439 9315 ◇ |
|                 |                                                 |      | 30° | 23327 9320 ◇           | 23328 9325 ◇ | 23278 9320 ◇ | 23279 9325 ◇ | 24438 9320 ◇ | 24439 9325 ◇ |
|                 |                                                 |      | 45° | 23327 9330 ◇           | 23328 9335 ◇ | 23278 9330 ◇ | 23279 9335 ◇ | 24438 9330 ◇ | 24439 9335 ◇ |
| 2700K<br>CRI>90 | LED 25W / 2688lm / ' / 48V-DC                   | IP20 | 18° | 23327 9210 ◇           | 23328 9215 ◇ | 23278 9210 ◇ | 23279 9215 ◇ | 24438 9210 ◇ | 24439 9215 ◇ |
|                 |                                                 |      | 30° | 23327 9220 ◇           | 23328 9225 ◇ | 23278 9220 ◇ | 23279 9225 ◇ | 24438 9220 ◇ | 24439 9225 ◇ |
|                 |                                                 |      | 45° | 23327 9230 ◇           | 23328 9235 ◇ | 23278 9230 ◇ | 23279 9235 ◇ | 24438 9230 ◇ | 24439 9235 ◇ |
|                 | 6500-2700K / CRI>90<br>LED 9W / 1087lm / 48V-DC | IP20 | 18° |                        | 23360 9015 ◇ |              | 23292 9015 ◇ |              | 24446 9015 ◇ |
|                 |                                                 |      | 30° |                        | 23360 9025 ◇ |              | 23292 9025 ◇ |              | 24446 9025 ◇ |
|                 |                                                 |      | 45° |                        | 23360 9035 ◇ |              | 23292 9035 ◇ |              | 24446 9035 ◇ |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

\*\* TUNABLE WHITE DALI DT8

◇ B ● / W ○



NEW

## SPY 66 WALLWASH

|                 |                             |       |          | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|-----------------------------|-------|----------|------------------------|--------------|--------------|--------------|-----|------|
|                 |                             |       |          | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | LED 17.2W / 2101lm / 48V-DC | IP 20 | WALLWASH | 24635 9300 ◇           | 24636 9305 ◇ | 24633 9300 ◇ | 24634 9305 ◇ |     |      |
| 2700K<br>CRI>90 | LED 17.2W / 2009lm / 48V-DC |       |          | 24635 9200 ◇           | 24636 9205 ◇ | 24633 9200 ◇ | 24634 9205 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○

MDL MODULES STANDARD  
ON UPPER CONDUCTORS.ON REQUEST AVAILABLE  
ON LOWER CONDUCTORS  
FOR SECOND CIRCUIT

## FINISH YOUR SPECIFICATION

## REQUIREMENT / OPTION / ACCESSORY

| LED POWER SUPPLY 48V-DC  |  | MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |                                  |                |    |    |    |    |    |    |    |    |     |     |    |    |    |
|--------------------------|--|----------------------------------------------------|----------------------------------|----------------|----|----|----|----|----|----|----|----|-----|-----|----|----|----|
|                          |  | NON DIM - 48V-DC - 240W                            | 300 89 48 240                    | 114 x 63 x 125 | R* | R* | R* | R* | R* | R* | R* | R* | R*  | R*  | R* | R* | R* |
| MODULATOR                |  | MORE INFO TECHNICAL CHAPTER                        |                                  |                |    |    |    |    |    |    |    |    |     |     |    |    |    |
|                          |  | MODULATOR DALI 1-10V DIM                           | 300 90 011                       | 93 x 78 x 56   | R* |    |    | R* |    |    | R* |    |     | R*  |    |    | R* |
|                          |  | or MODULATOR WIRELESS                              | 300 90 012                       | 93 x 78 x 56   | R* |    |    | R* |    |    | R* |    |     | R*  |    |    | R* |
|                          |  | or MODULATOR WIRELESS PLUG-IN                      | 21032 0030                       | 190 x 16 x 16  | R  |    |    | R  |    |    | R  |    |     | R   |    |    | R  |
| FINISH                   |  | SPY 52 TUBE                                        | 19810 0100 B / FBR / FG / GC / W |                | R  | R  |    |    |    |    |    |    |     |     |    |    |    |
|                          |  | SPY 66 TUBE                                        | 24611 0100 B / FBR / FG / GC / W |                |    |    |    |    |    |    |    |    | R   | R   |    |    |    |
| HONEYCOMB / LENS / GLASS |  | HONEYCOMB SINGLE USE                               | 19810 0010 B                     |                | A  | A  |    |    |    |    |    |    |     |     |    |    |    |
|                          |  | HONEYCOMB DOUBLE USE                               | 19810 0060 B                     |                | A  | A  |    |    |    |    |    |    |     |     |    |    |    |
|                          |  | LINEAR SPREAD LENS                                 | 19810 0020                       |                | A  | A  |    |    |    |    |    |    |     |     |    |    |    |
|                          |  | SPREAD LENS                                        | 19810 0030                       |                | A  | A  |    |    |    |    |    |    |     |     |    |    |    |
|                          |  | SOFTENING LENS                                     | 19810 0040                       |                | A  | A  |    |    |    |    |    |    |     |     |    |    |    |
|                          |  | GLASS SBL                                          | 19810 0050                       |                | A  | A  |    |    |    |    |    |    |     |     |    |    |    |
|                          |  | HONEYCOMB SINGLE USE                               | 24611 0150 B                     |                |    |    |    |    |    |    |    |    | A   | A   |    |    |    |
|                          |  | HONEYCOMB DOUBLE USE                               | 24611 0210 B                     |                |    |    |    |    |    |    |    |    | A** | A** |    |    |    |
|                          |  | LINEAR SPREAD LENS                                 | 24611 0170                       |                |    |    |    |    |    |    |    |    | A** | A** |    |    |    |
|                          |  | SPREAD LENS                                        | 24611 0200                       |                |    |    |    |    |    |    |    |    | A** | A** |    |    |    |
|                          |  | SOFTENING LENS                                     | 24611 0190                       |                |    |    |    |    |    |    |    |    | A** | A** |    |    |    |
|                          |  | GLASS SBL                                          | 24611 0160                       |                |    |    |    |    |    |    |    |    | A** | A** |    |    |    |

\* REMOTE INSTALLATION

\*\* ONLY FOR TUNABLE WHITE


PRO

PROFILES


B

# MAGNETIC MODULES

PRO



SPY FOCUS LP




|                 |                               |      |          | M20 / M26H / M26H+SBL* |              | M26L         |              | M52          |              |
|-----------------|-------------------------------|------|----------|------------------------|--------------|--------------|--------------|--------------|--------------|
|                 |                               |      |          | MDL                    | DALI         | MDL          | DALI         | MDL          | DALI         |
| 3000K<br>CRI>90 | LED 8.6W / 1018lm /<br>48V-DC | IP20 | 8° - 43° | 23378 9300 ◇           | 23379 9305 ◇ | 23230 9300 ◇ | 23231 9305 ◇ | 24428 9300 ◇ | 24429 9305 ◇ |
| 2700K<br>CRI>90 | LED 8.6W / 974lm /<br>48V-DC  |      |          | 23378 9200 ◇           | 23379 9205 ◇ | 23230 9200 ◇ | 23231 9205 ◇ | 24428 9200 ◇ | 24429 9205 ◇ |


\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / W ○

A




SPY FOCUS MP



|                 |                                |      |           | M20 / M26H / M26H+SBL* |              | M26L         |              | M52          |              |
|-----------------|--------------------------------|------|-----------|------------------------|--------------|--------------|--------------|--------------|--------------|
|                 |                                |      |           | MDL                    | DALI         | MDL          | DALI         | MDL          | DALI         |
| 3000K<br>CRI>90 | LED 17.2W / 2101lm /<br>48V-DC | IP20 | 12° - 45° | 23332 9300 ◇           | 23373 9305 ◇ | 23232 9300 ◇ | 23233 9305 ◇ | 24426 9300 ◇ | 24427 9305 ◇ |
| 2700K<br>CRI>90 | LED 17.2W / 2009lm /<br>48V-DC |      |           | 23332 9200 ◇           | 23373 9205 ◇ | 23232 9200 ◇ | 23233 9205 ◇ | 24426 9200 ◇ | 24427 9205 ◇ |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / W ○




VIZIR

|                 |                           |      |    | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|---------------------------|------|----|------------------------|--------------|--------------|--------------|-----|------|
|                 |                           |      |    | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | LED 5.7W / 519lm / 48V-DC | IP20 | 8° | 23365 9310 ◇           | 23371 9315 ◇ | 23246 9310 ◇ | 23247 9315 ◇ |     |      |
| 2700K<br>CRI>90 | LED 5.7W / 519lm / 48V-DC |      |    | 23365 9210 ◇           | 23371 9215 ◇ | 23246 9210 ◇ | 23247 9215 ◇ |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE


◇ BBR ● / GC ●



## VIZIR L

| VIZIR L                                  |                             |      |     | M20 / M26H / M26H+SBL* |              | M26L           |              | M52 |      |
|------------------------------------------|-----------------------------|------|-----|------------------------|--------------|----------------|--------------|-----|------|
|                                          |                             |      |     | MDL                    | DALI         | MDL            | DALI         | MDL | DALI |
| 3000K<br>CRI>90                          | LED 10.4W / 1128lm / 48V-DC | IP20 | 33° | 473 152 811 932 MDL ◇  | 23362 9325 ◇ | 23248 9320 ◇   | 23249 9325 ◇ |     |      |
| 2700K<br>CRI>90                          | LED 10.4W / 1083lm / 48V-DC |      |     | 473 152 811 922 MDL ◇  | 23362 9225 ◇ | 23248 9220 ◇   | 23249 9225 ◇ |     |      |
| *MDL: MODULES NOT FOR M26H + SBL PROFILE |                             |      |     |                        |              | ◇ BBR ● / GC ● |              |     |      |


\* MDL MODULES NOT FOR M26H + SBL PROFILE



## HEDRA

| HEDRA                                    |                           |      |    | M20 / M26H / M26H+SBL* |              | M26L           |              | M52 |      |
|------------------------------------------|---------------------------|------|----|------------------------|--------------|----------------|--------------|-----|------|
|                                          |                           |      |    | MDL                    | DALI         | MDL            | DALI         | MDL | DALI |
| 3000K<br>CRI>90                          | LED 5.7W / 519lm / 48V-DC | IP20 | 8° | 23366 9310 ◇           | 23363 9315 ◇ | 23250 9310 ◇   | 23251 9315 ◇ |     |      |
| 2700K<br>CRI>90                          | LED 5.7W / 519lm / 48V-DC |      |    | 23366 9210 ◇           | 23363 9215 ◇ | 23250 9210 ◇   | 23251 9215 ◇ |     |      |
| *MDL: MODULES NOT FOR M26H + SBL PROFILE |                           |      |    |                        |              | ◇ BBR ● / GC ● |              |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE



## HEDRA L

| HEDRA L                                  |                             |      |     | M20 / M26H / M26H+SBL* |              | M26L           |              | M52 |      |
|------------------------------------------|-----------------------------|------|-----|------------------------|--------------|----------------|--------------|-----|------|
|                                          |                             |      |     | MDL                    | DALI         | MDL            | DALI         | MDL | DALI |
| 3000K<br>CRI>90                          | LED 10.4W / 1128lm / 48V-DC | IP20 | 33° | 473 252 811 932 MDL ◇  | 23364 9325 ◇ | 23252 9320 ◇   | 23253 9325 ◇ |     |      |
| 2700K<br>CRI>90                          | LED 10.4W / 1083lm / 48V-DC |      |     | 473 252 811 922 MDL ◇  | 23364 9225 ◇ | 23252 9220 ◇   | 23253 9225 ◇ |     |      |
| *MDL: MODULES NOT FOR M26H + SBL PROFILE |                             |      |     |                        |              | ◇ BBR ● / GC ● |              |     |      |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

MDL MODULES STANDARD  
ON UPPER CONDUCTORS.ON REQUEST AVAILABLE  
ON LOWER CONDUCTORS  
FOR SECOND CIRCUIT

## FINISH YOUR SPECIFICATION

## REQUIREMENT / OPTION / ACCESSORY

|                                                                            |  | SPY FOCUS                  |                | VIZIR |      | HEDRA |      |
|----------------------------------------------------------------------------|--|----------------------------|----------------|-------|------|-------|------|
|                                                                            |  | MDL                        | DALI           | MDL   | DALI | MDL   | DALI |
| LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |  |                            |                |       |      |       |      |
| NON DIM - 48V-DC - 240W                                                    |  | 300 89 48 240              | 114 x 63 x 125 | R *   | R *  | R *   | R *  |
| MODULATOR MORE INFO TECHNICAL CHAPTER                                      |  |                            |                |       |      |       |      |
| MODULATOR DALI 1-10V DIM                                                   |  | 300 90 011                 | 93 x 78 x 56   | R *   | R *  | R *   | R *  |
| or MODULATOR WIRELESS                                                      |  | 300 90 012                 | 93 x 78 x 56   | R *   | R *  | R *   | R *  |
| or MODULATOR WIRELESS PLUG-IN                                              |  | 21032 0030                 | 190 x 16 x 16  | R     | R    | R     | R    |
| FINISH                                                                     |  |                            |                |       |      |       |      |
| VIZIR TUBE                                                                 |  | 473 01 00 B / FBR / FG / W |                | R     | R    | R     | R    |
| HONEYCOMB / LENS / GLASS                                                   |  |                            |                |       |      |       |      |
| HONEYCOMB                                                                  |  | 473 03 01 B                |                | A     | A    | A     | A    |
| SOFTENING LENS                                                             |  | 473 03 04                  |                | A     | A    | A     | A    |

\* REMOTE INSTALLATION

# MAGNETIC MODULES




Diagram of the Microspy 39 C module, showing a vertical profile with a diameter of Ø38 and a height of 400.

| MICROSPY 39 C   |                           |      |     | M20 / M26H / M26H+SBL* |              | M26L                  |              | M52                   |              |
|-----------------|---------------------------|------|-----|------------------------|--------------|-----------------------|--------------|-----------------------|--------------|
|                 |                           |      |     | MDL                    | DALI         | MDL                   | DALI         | MDL                   | DALI         |
| 3000K<br>CRI>90 | LED 7.1W / 812lm / 48V-DC | IP20 | 45° | 421 612 811 931 MDL ◇  | 23353 9315 ◇ | 421 612 811 931 MDL ◇ | 23353 9315 ◇ | 421 612 811 931 MDL ◇ | 23353 9315 ◇ |
| 2700K<br>CRI>90 | LED 7.1W / 779lm / 48V-DC |      |     | 421 612 811 921 MDL ◇  | 23353 9215 ◇ | 421 612 811 921 MDL ◇ | 23353 9215 ◇ | 421 612 811 921 MDL ◇ | 23353 9215 ◇ |

\*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○  
INCL. 1 x CABLE 2 x 0.75mm² / 1.6m

A




Diagram of the Tweeter BL module, showing a circular profile with a diameter of Ø147 and a height of 0-90°/350°.

| TWEETER BL      |                             |      |                       | M20 / M26H / M26H+SBL* |              | M26L         |              | M52 |      |
|-----------------|-----------------------------|------|-----------------------|------------------------|--------------|--------------|--------------|-----|------|
|                 |                             |      |                       | MDL                    | DALI         | MDL          | DALI         | MDL | DALI |
| 3000K<br>CRI>90 | LED 10.4W / 1128lm / 48V-DC | IP20 |                       | 421 522 811 930 MDL ◇  | 23352 9305 ◇ | 23242 9300 ◇ | 23243 9305 ◇ |     |      |
| 2700K<br>CRI>90 | LED 10.4W / 1083lm / 48V-DC |      | 421 522 811 920 MDL ◇ | 23352 9205 ◇           | 23242 9200 ◇ | 23243 9205 ◇ |              |     |      |

\*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○  
EXCL. GLASS

deltaight.com/splitline  
deltaight.com/shiftline




Diagram of the Gibbo module, showing a circular profile with a diameter of Ø147.


| GIBBO           |                           |      |                       | M20 / M26H / M26H+SBL* |                       | M26L                  |                       | M52                   |              |
|-----------------|---------------------------|------|-----------------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|--------------|
|                 |                           |      |                       | MDL                    | DALI                  | MDL                   | DALI                  | MDL                   | DALI         |
| 3000K<br>CRI>90 | LED 7.1W / 812lm / 48V-DC | IP20 |                       | 421 622 811 930 MDL ◇  | 23354 9305 ◇          | 421 622 811 930 MDL ◇ | 23354 9305 ◇          | 421 622 811 930 MDL ◇ | 23354 9305 ◇ |
| 2700K<br>CRI>90 | LED 7.1W / 779lm / 48V-DC |      | 421 622 811 920 MDL ◇ | 23354 9205 ◇           | 421 622 811 920 MDL ◇ | 23354 9205 ◇          | 421 622 811 920 MDL ◇ | 23354 9205 ◇          |              |

\*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○  
EXCL. GLASS  
INCL. 1 x CABLE 2 x 0.75mm²  
INCL. 1 x CABLE SUSP. SINGLE AUTO 1,6m




# READ MY COLOUR

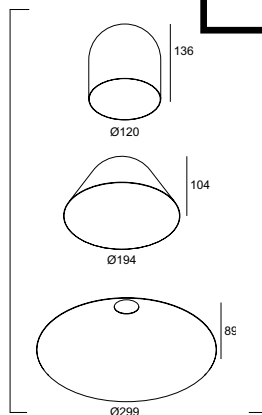

◇ B ● / GC ● / W ○


# CHOOSE YOUR SHADE(S)

◇ B ● / W ○



NEW

## CUPPA C



|                                                    |                            |      |     | M20 / M26H / M26H+SBL* |              | M26L         |              | M52          |              |
|----------------------------------------------------|----------------------------|------|-----|------------------------|--------------|--------------|--------------|--------------|--------------|
|                                                    |                            |      |     | MDL                    | DALI         | MDL          | DALI         | MDL          | DALI         |
| 3000K<br>CRI>90                                    | LED 8,6W / 1089lm / 48V-DC | IP20 | 40° | 28811 9330 ◇           | 28812 9335 ◇ | 28811 9330 ◇ | 28812 9335 ◇ | 28811 9330 ◇ | 28812 9335 ◇ |
| 2700K<br>CRI>90                                    | LED 8,6W / 1041lm / 48V-DC |      |     | 28811 9230 ◇           | 28812 9235 ◇ | 28811 9230 ◇ | 28812 9235 ◇ | 28811 9230 ◇ | 28812 9235 ◇ |
| 3000-1800K / CRI>90<br>LED 10,2W / 1038lm / 48V-DC |                            |      |     | 28813 9030 ◇           | 28814 9035 ◇ | 28813 9030 ◇ | 28814 9035 ◇ | 28813 9030 ◇ | 28814 9035 ◇ |

\* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B-GC ● / W-GC ○

EXCL. CUPPA SHADE  
INCL. 1 x CABLE 2 x 0.75mm<sup>2</sup> 1,6m



MDL MODULES STANDARD  
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE  
FOR LOWER CONDUCTORS  
FOR SECOND CIRCUIT

## FINISH YOUR SPECIFICATION

## REQUIREMENT / OPTION / ACCESSORY

| ON LOWER CONDUCTORS<br>FOR SECOND CIRCUIT                                  |  |                   |                | MICROSPY |      | TWEETER BL |      | GIBBO |      | CUPPA |      |
|----------------------------------------------------------------------------|--|-------------------|----------------|----------|------|------------|------|-------|------|-------|------|
|                                                                            |  |                   |                | MDL      | DALI | MDL        | DALI | MDL   | DALI | MDL   | DALI |
| LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |  |                   |                |          |      |            |      |       |      |       |      |
| NON DIM - 48V-DC - 240W                                                    |  | 300 89 48 240     | 114 x 63 x 125 | R *      | R *  | R *        | R *  | R *   | R *  | R *   | R *  |
| MODULATOR MORE INFO TECHNICAL CHAPTER                                      |  |                   |                |          |      |            |      |       |      |       |      |
| MODULATOR DALI 1-10V DIM                                                   |  | 300 90 011        | 93 x 78 x 56   | R *      |      | R *        |      | R *   |      | R *   |      |
| or MODULATOR WIRELESS                                                      |  | 300 90 012        | 93 x 78 x 56   | R *      |      | R *        |      | R *   |      | R *   |      |
| or MODULATOR WIRELESS PLUG-IN                                              |  | 21032 0030        | 190 x 16 x 16  | R        |      | R          |      | R     |      | R     |      |
| FINISH                                                                     |  |                   |                |          |      |            |      |       |      |       |      |
| BOWL GLASS CLEAR                                                           |  | 286 67 01         |                |          |      | R          | R    | R     | R    |       |      |
| or BOWL GLASS AMBER                                                        |  | 286 67 02         |                |          |      | R          | R    | R     | R    |       |      |
| or BOWL GLASS OPAL WHITE                                                   |  | 286 67 03         |                |          |      | R          | R    | R     | R    |       |      |
| CUPPA SHADE 120                                                            |  | 28800 0010 B/GC/W |                |          |      |            |      |       |      | R     | R    |
| or CUPPA SHADE 190                                                         |  | 28800 0020 B/GC/W |                |          |      |            |      |       |      | R     | R    |
| or CUPPA SHADE 300                                                         |  | 28800 0030 B/GC/W |                |          |      |            |      |       |      | R     | R    |
| or CUPPA DISK                                                              |  | 28800 0040 B/W    |                |          |      |            |      |       |      | R     | R    |

\* REMOTE INSTALLATION

PRO

PROFILES

# SPLITLINE 14

# SHIFTLINE 19

Narrow streets draw black lines through space and literally form a 'lighting path' that dialogues with the architecture of the surroundings. The Splitline 14 profile can be combined with several accent lights, depending on what the space needs, both functionally and in terms of design. Splitline 14 effortlessly integrates with architecture, upgrading the uniqueness of the room.



Building on the flexibility of our Superloop, adding the refinement of our 2F track and shrinking down the design to the level of our Shelfline. The result? Shiftline 19! This miniature profile lets you combine accent lighting and decorative lighting in the shape of Uho, Spy 27 and Spy 39.

Containing 2 48V and 2 Dim conductors for individual dimming, the slender profile can easily be combined with Smart 48 and CTRL Delta to offer a quick and easy, minimalistic, wireless lighting set-up. Shiftline 19 has many application possibilities, as its dimensions are reduced to a minimum which allow a surface mounted installation that only requires a minimum of space. Be it in residential, hospitality or in retail, the different modules to apply on the Shiftline 19 track can be used for accent lighting or decorative lighting, offering multiple ways of flexibility.

[deltalight.com/shiftline](https://deltalight.com/shiftline)  
[deltalight.com/splitline](https://deltalight.com/splitline)

**SHIFTLINE 19**

**Toolfree  
installation**

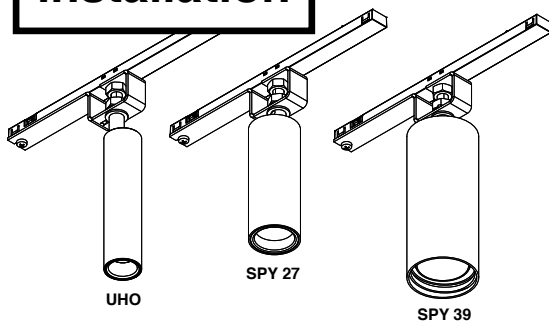




PRO

PROFILES


**SPLITLINE 14**

**Go around the corner**



# SPLITLINE 14

# SHIFTLINE 19

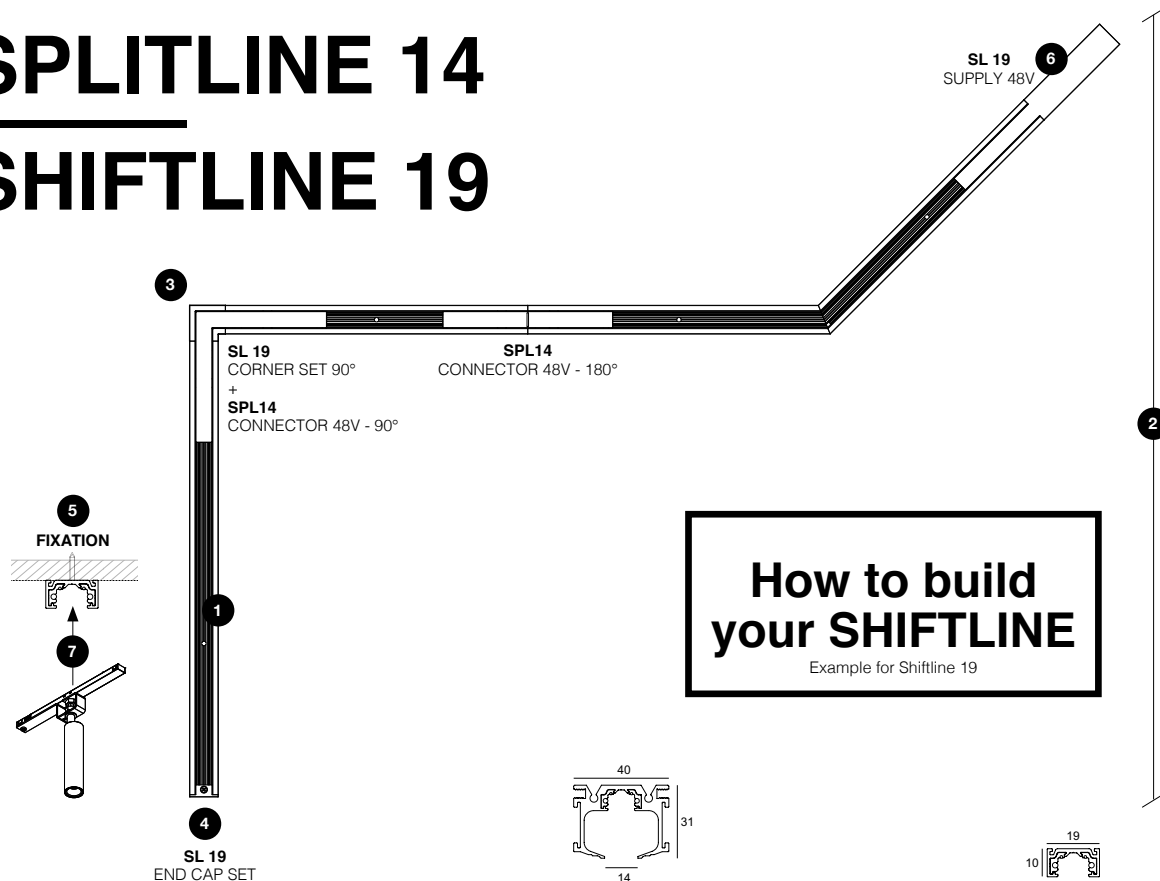

**A**

46 x (L + 5) x 55  
min.9 / max.20

|                  | SPLITLINE 14          | SHIFTLINE 19                |
|------------------|-----------------------|-----------------------------|
| <b>1 PROFILE</b> |                       |                             |
| PROFILE 2m       | 27300 0020 ◇<br>◇ B ● | 27011 0050 ◇<br>◇ B ● / W ○ |
| PROFILE 3m       | 27300 0030 ◇<br>◇ B ● | 27011 0060 ◇<br>◇ B ● / W ○ |

## 2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

## 3 JUNCTION / CORNER

|              |              |                  |
|--------------|--------------|------------------|
| CORNER 180°  | 420 06 01    | -                |
| CORNER 90°   | 27300 0640 B | 27011 0630 B / W |
| CORNER 90° V | 27300 0650 B | 27011 0670 B / W |

## 4 ENDCAP

|                 |              |                  |
|-----------------|--------------|------------------|
| ENDCAP (2 PCS.) | 27300 0300 B | 27011 0310 B / W |
|-----------------|--------------|------------------|

## 5 FIXATION

|                       |              |   |
|-----------------------|--------------|---|
| RECESSED              |              |   |
| FIXATION SET (2 PCS.) | 420 20 14 01 | - |


## 6 CONNECTION (max.200W/supply/max.50m)

|                           |            |                  |
|---------------------------|------------|------------------|
| SUPPLY 48V-DC             | 27300 0910 | 27011 0910 B / W |
| CONNECTOR 48V-DC - 90°    | -          | 27011 9920       |
| CONNECTOR 48V-DC - 90° V  | -          | 27011 9930       |
| CONNECTOR 48V-DC - 180°   | 27011 9910 | 27011 9910       |
| CONNECTOR 48V-DC - 0-180° | 27300 9970 | -                |


## LIGHT MODULES

SEE NEXT PAGE

## 7 LIGHT MODULES



0-85°/355°




0-85°/355°


## UHO

|              |                         |      |     | SPL14        |              | SL19         |              | L SPL14      |              | L SL19       |              |
|--------------|-------------------------|------|-----|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|              |                         |      |     | MDL          | DALI         | MDL          | DALI         | MDL          | DALI         | MDL          | DALI         |
| 3000K CRI>90 | LED 2 / 232lm / 48V-DC  | IP20 | 30° | 27311 9320 ◇ | 27312 9325 ◇ | 27020 9320 ◇ | 27021 9325 ◇ | 27319 9320 ◇ | 27320 9325 ◇ | 27028 9320 ◇ | 27029 9325 ◇ |
| 2700K CRI>90 | LED 2 / 211 lm / 48V-DC |      |     | 27311 9220 ◇ | 27312 9225 ◇ | 27020 9220 ◇ | 27021 9225 ◇ | 27319 9220 ◇ | 27320 9225 ◇ | 27028 9220 ◇ | 27029 9225 ◇ |

◇ B ● / FBR ● / FG ● / GC ● / W ○



0-85°/355°




0-85°/355°


## SPY 27

|              |                           |      |     | SPL14        |              | SL19         |              | L SPL14      |              | L SL19       |              |
|--------------|---------------------------|------|-----|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|              |                           |      |     | MDL          | DALI         | MDL          | DALI         | MDL          | DALI         | MDL          | DALI         |
| 3000K CRI>90 | LED 5.8W / 787lm / 48V-DC | IP20 | 30° | 27313 9320 ◇ | 27314 9325 ◇ | 27022 9320 ◇ | 27023 9325 ◇ | 27321 9320 ◇ | 27322 9325 ◇ | 27030 9320 ◇ | 27031 9325 ◇ |
| 2700K CRI>90 | LED 5.8W / 753lm / 48V-DC |      |     | 27313 9220 ◇ | 27314 9225 ◇ | 27022 9220 ◇ | 27023 9225 ◇ | 27321 9220 ◇ | 27322 9225 ◇ | 27030 9220 ◇ | 27031 9225 ◇ |

◇ B ● / FBR ● / FG ● / GC ● / W ○



0-85°/355°



0-85°/355°

## SPY 39

| SPY 39                            |                            |      |     | SPL14        |              | SL19         |              | L SPL14      |              | L SL19       |              |
|-----------------------------------|----------------------------|------|-----|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                                   |                            |      |     | MDL          | DALI         | MDL          | DALI         | MDL          | DALI         | MDL          | DALI         |
| 3000K<br>CRI>90                   | LED 8.6W / 1089lm / 48V-DC | IP20 | 20° | 27315 9320 ◇ | 27316 9325 ◇ | 27024 9320 ◇ | 27025 9325 ◇ | 27323 9320 ◇ | 27324 9325 ◇ | 27032 9320 ◇ | 27033 9325 ◇ |
|                                   |                            |      | 40° | 27315 9330 ◇ | 27316 9335 ◇ | 27024 9330 ◇ | 27025 9335 ◇ | 27323 9330 ◇ | 27324 9335 ◇ | 27032 9330 ◇ | 27033 9335 ◇ |
| 2700K<br>CRI>90                   | LED 8.6W / 1041lm / 48V-DC |      | 20° | 27315 9220 ◇ | 27316 9225 ◇ | 27024 9220 ◇ | 27025 9225 ◇ | 27323 9220 ◇ | 27324 9225 ◇ | 27032 9220 ◇ | 27033 9225 ◇ |
|                                   |                            |      | 40° | 27315 9230 ◇ | 27316 9235 ◇ | 27024 9230 ◇ | 27025 9235 ◇ | 27323 9230 ◇ | 27324 9235 ◇ | 27032 9230 ◇ | 27033 9235 ◇ |
| ◇ B ● / FBR ● / FG ● / GC ● / W ○ |                            |      |     |              |              |              |              |              |              |              |              |

◇ B ● / FBR ● / FG ● / GC ● / W ○



## FINISH YOUR SPECIFICATION

### REQUIREMENT / OPTION / ACCESSORY

|                                                                                   |  |  |  | UHO                              |                | SPY 27 |      | SPY 39 |      | SPY 39 L |      |
|-----------------------------------------------------------------------------------|--|--|--|----------------------------------|----------------|--------|------|--------|------|----------|------|
|                                                                                   |  |  |  | MDL                              | DALI           | MDL    | DALI | MDL    | DALI | MDL      | DALI |
| <b>LED POWER SUPPLY 48V-DC</b> MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT |  |  |  |                                  |                |        |      |        |      |          |      |
| NON DIM - 48V-DC - 240W                                                           |  |  |  | 300 89 48 240                    | 114 x 63 x 125 | R *    | R *  | R *    | R *  | R *      | R *  |
| <b>MODULATOR</b> MORE INFO TECHNICAL CHAPTER                                      |  |  |  |                                  |                |        |      |        |      |          |      |
| MODULATOR DALI 1-10V DIM                                                          |  |  |  | 300 90 011                       | 93 x 78 x 56   | R *    |      | R *    |      | R *      |      |
| or MODULATOR WIRELESS                                                             |  |  |  | 300 90 012                       | 93 x 78 x 56   | R *    |      | R *    |      | R *      |      |
| or MODULATOR WIRELESS PLUG-IN                                                     |  |  |  | 21032 0030                       | 190 x 16 x 16  | R      |      | R      |      | R        |      |
| <b>FINISH</b>                                                                     |  |  |  |                                  |                |        |      |        |      |          |      |
| SPY 39 TUBE                                                                       |  |  |  | 24144 0010 B / FBR / FG / GC / W |                |        |      | R      | R    |          |      |
| SPY 39 L TUBE                                                                     |  |  |  | 24144 0020 B / FBR / FG / GC / W |                |        |      |        |      | R        | R    |
| VISOR 27                                                                          |  |  |  | 216 12 01                        |                |        | A    | A      |      |          |      |
| VISOR 39                                                                          |  |  |  | 216 12 02                        |                |        |      | A      | A    |          |      |

\* REMOTE INSTALLATION