


Technical Specifications (see page 26)

The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m, and they can be connected one to each other to a total maximum length of 6.5 meters per electrical connection.


Wall-Wall / Ceiling-Ceiling




Wall-Wall (corner) / Wall-Ceiling

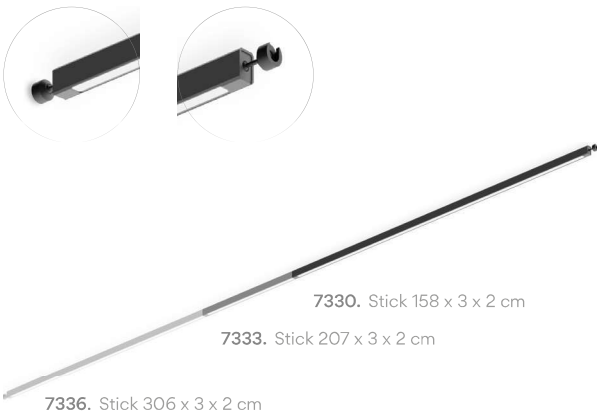


Wall-Pendant

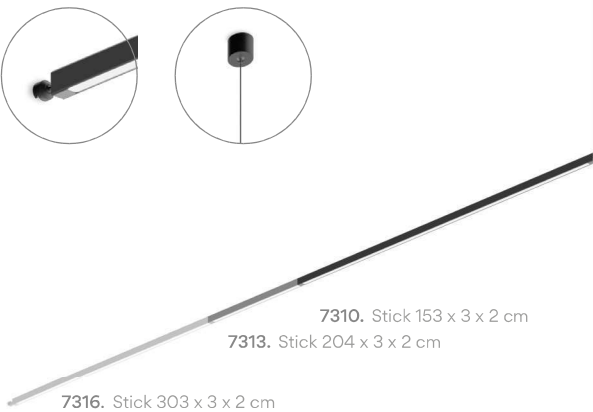

Pendant-Pendant

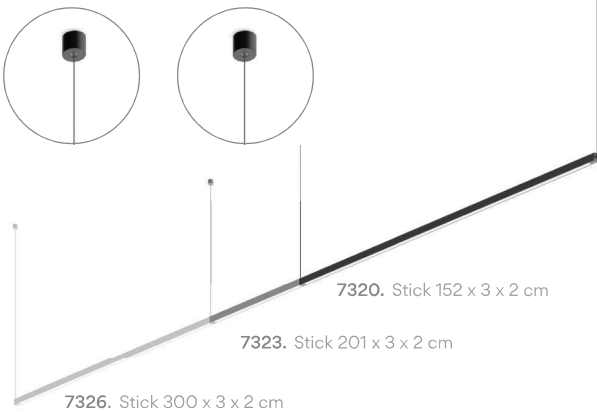

Pendant

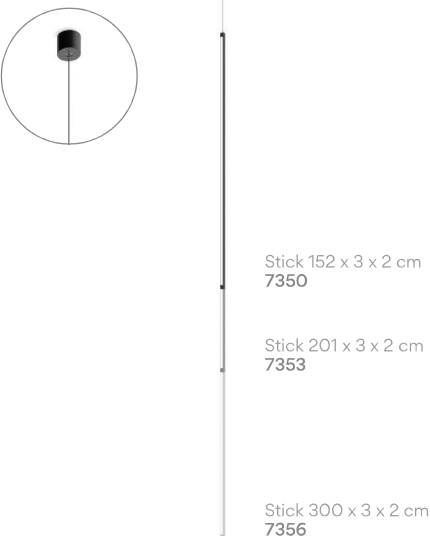


Floor-Wall



Sticks Connectable

Next sketches are composed by one or more compositions

Some sticks are Pendant / Ceiling

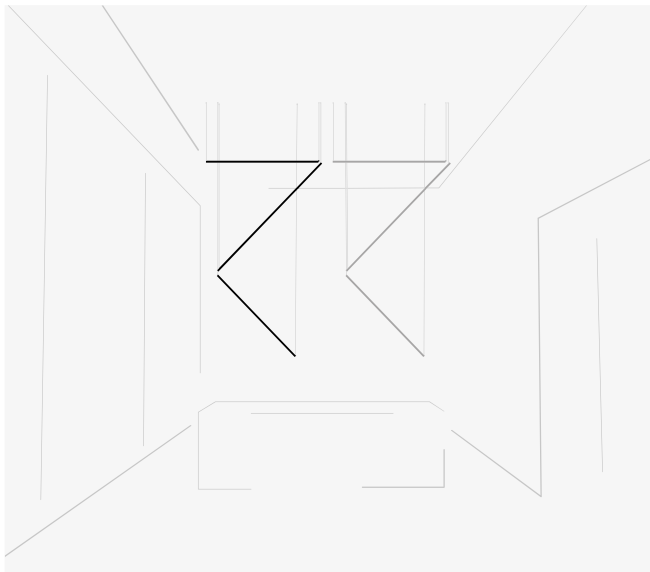

ST1001


Sketch composed by two identical compositions.

Each composition:

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.

LED 4000 K. 11870 lm. 88 W.

Remote driver-Trimless canopy. 1-10V.

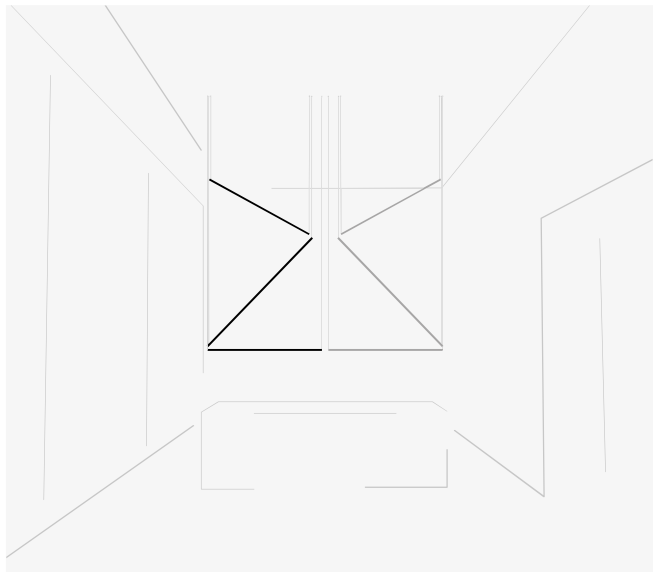

ST1005


Sketch composed by two identical compositions.

Each composition:

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.

LED 4000 K. 11870 lm. 88 W.

Remote driver-Trimless canopy. 1-10V.

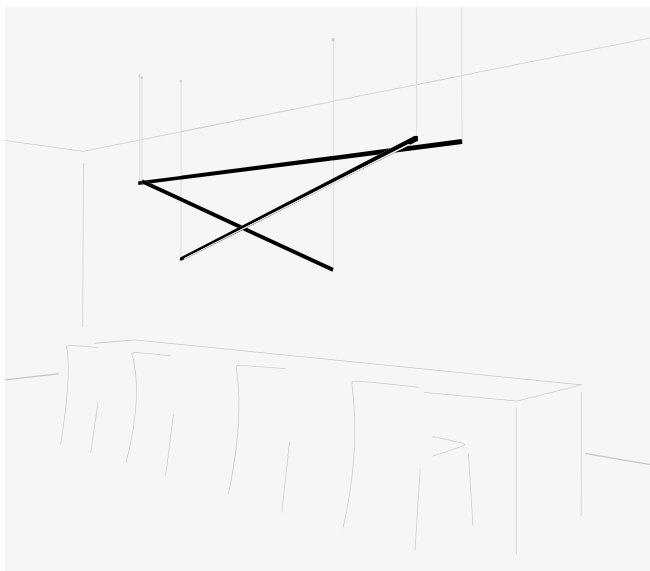

ST1015

Sketch composed by two compositions.

Composition 1:

2 Sticks: 1 x 150 cm, 1 x 300 cm. Total 4,5 m.

LED 2700 K. 9779 lm. 79,2 W.


Built-in disc S canopy. 1-10V.

Composition 2:

1 Stick: 1 x 300 cm. Total 3 m.

LED 2700 K. 6519 lm. 52,8 W.

Built-in disc S canopy. 1-10V.

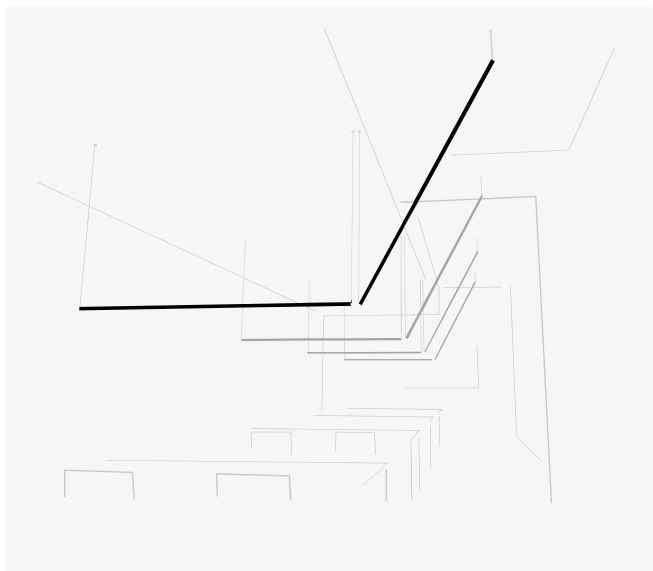

ST1021

Sketch composed by four identical compositions.


Each composition:

2 Sticks: 2 x 200 cm. Total 4 m.

LED 4000 K. 9496 lm. 140,8 W.

Built-in disc S canopy. 1-10V.


Sticks

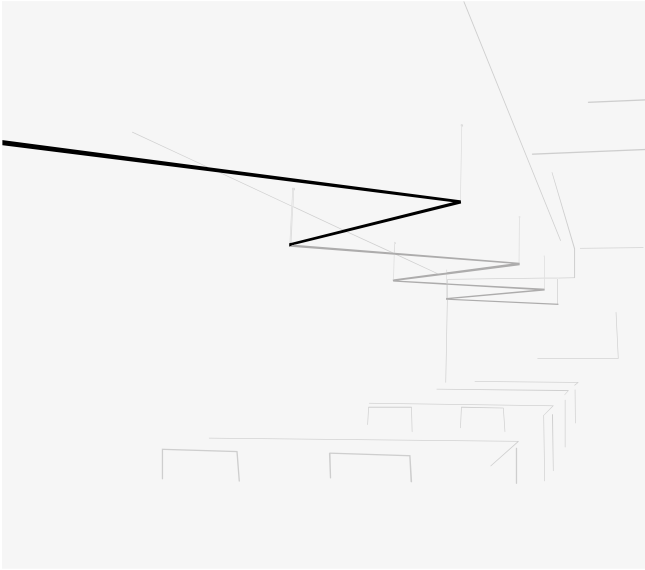

STI025

Sketch composed by four identical compositions.


Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K, 14244 lm, 105,6 W.
Built-in disc S canopy, 1-10V.

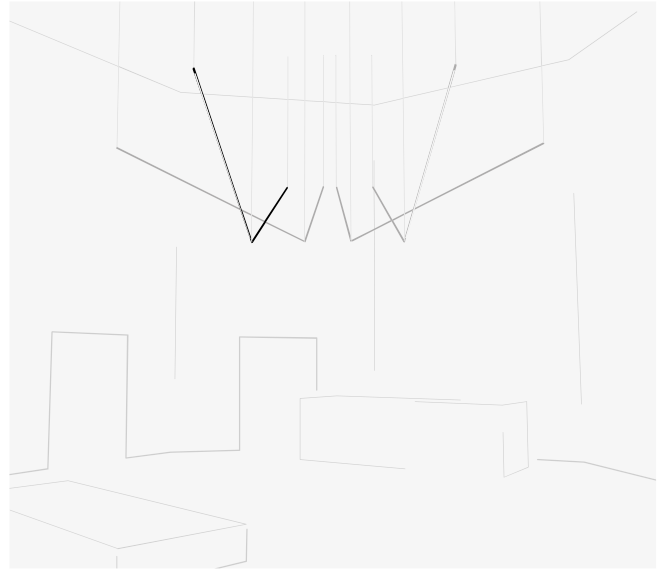

STI035

Sketch composed by four identical compositions.


Each composition:
2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 4000 K, 10683 lm, 79,2 W.
Built-in disc S canopy, 1-10V.

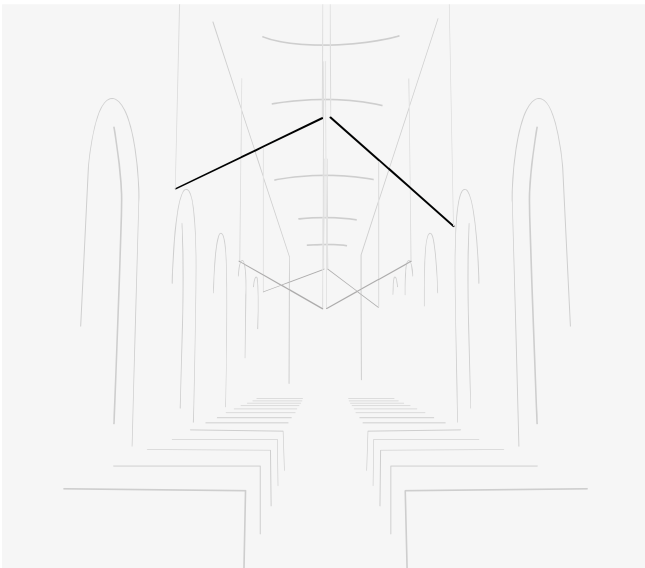

STI041

Sketch composed by three identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K, 14244 lm, 105,6 W.
Built-in disc S canopy, 1-10V.

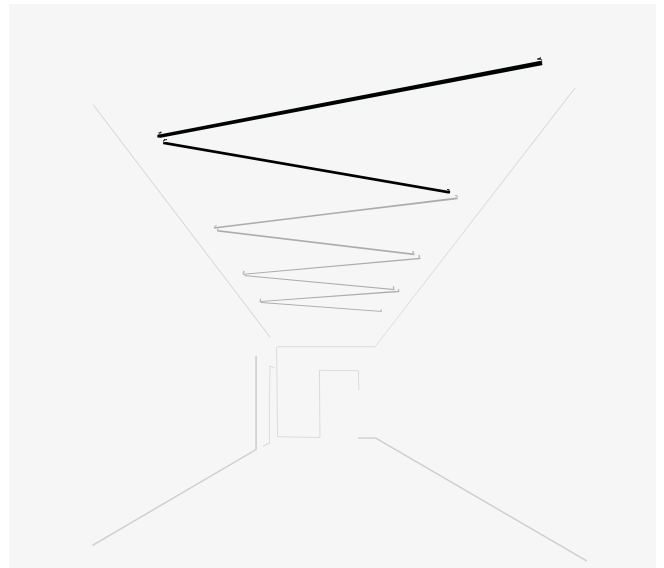

STI085


Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K, 14244 lm, 105,6 W.
Remote driver-Trimless canopy, 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions


Some sticks are attached to the Wall

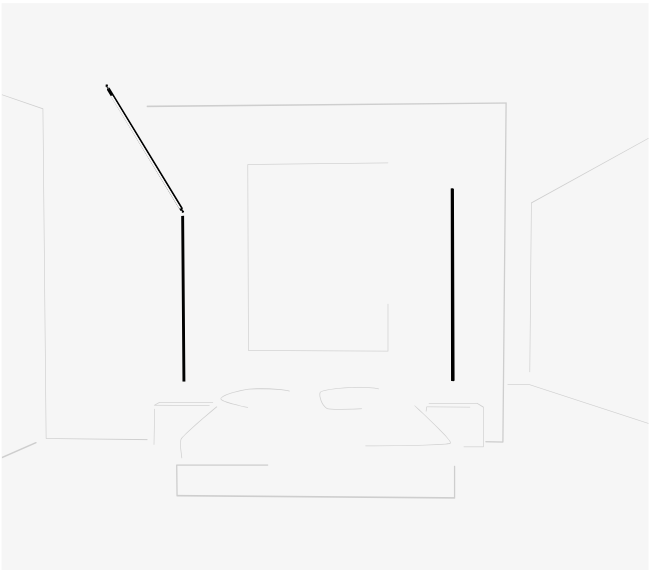

STI051
Sketch composed by two compositions.


Composition 1:
2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

Composition 2:
1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4346 lm. 35,2 W.
Floor base & plug. Push.

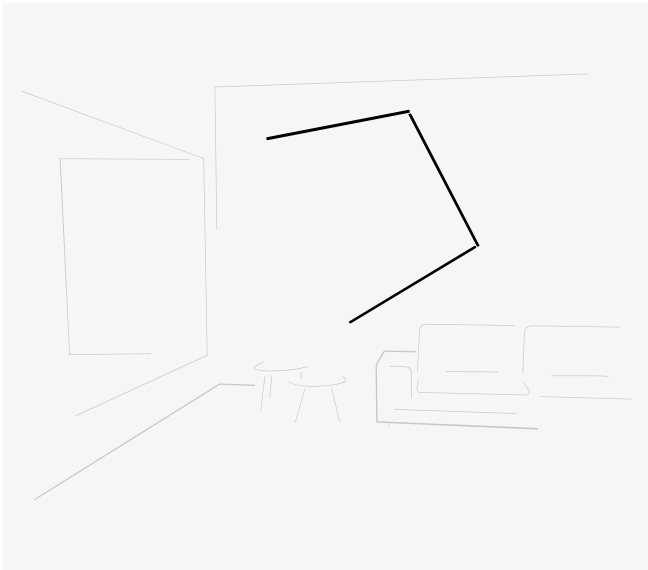


STI055
Sketch composed by only one composition.

3 Sticks: 3 x 150 cm. Total 4,5 m.
LED 2700 K. 9780 lm. 79,2 W.
Floor base & plug. Push.

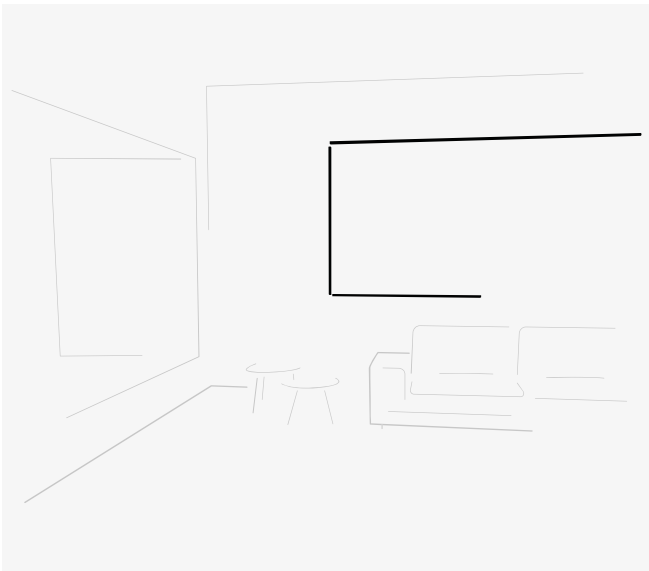

STI061
Sketch composed by only one composition.


3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 2700 K. 13039 lm. 105,6 W.
Floor base & plug. Push.

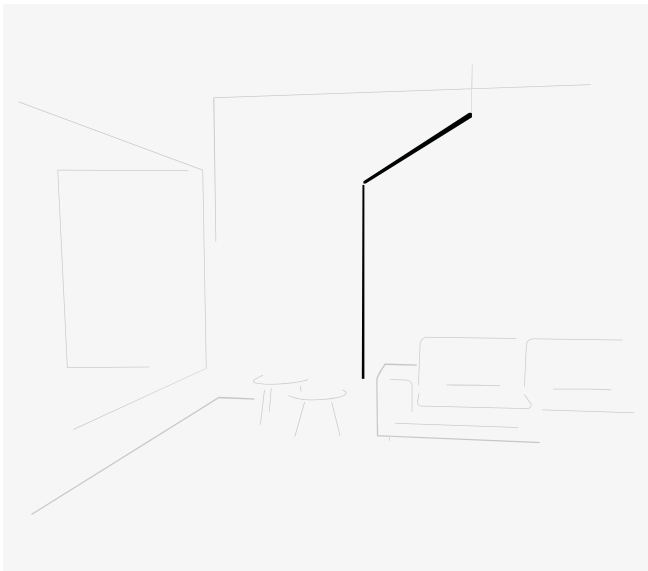

STI065
Sketch composed by only one composition.

2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.


Sticks

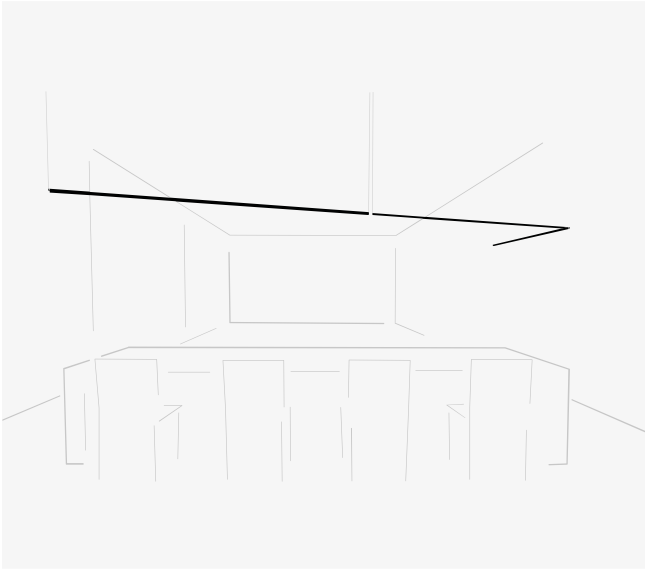

ST1071

Sketch composed by only one composition.


3 Sticks: 1 x 150 cm, 2 x 200 cm. Total 5,5 m.
LED 2700 K. 11952 lm. 96,8 W.
Floor base & plug. Push.

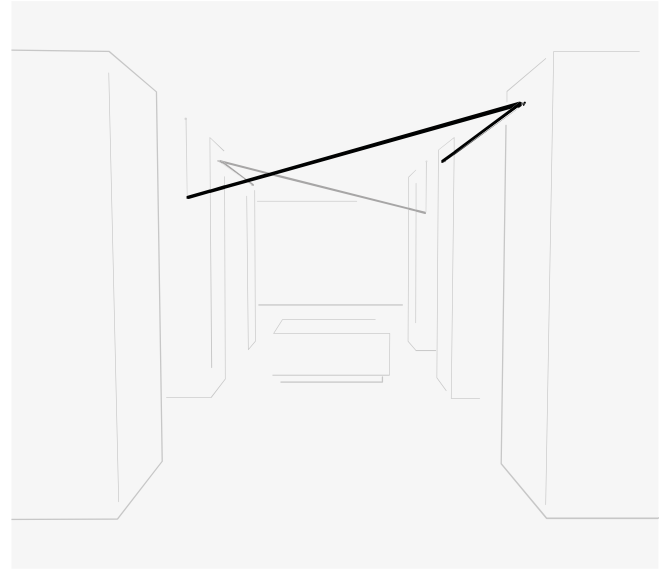

ST1075

Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver-Trimless canopy. 1-10V.

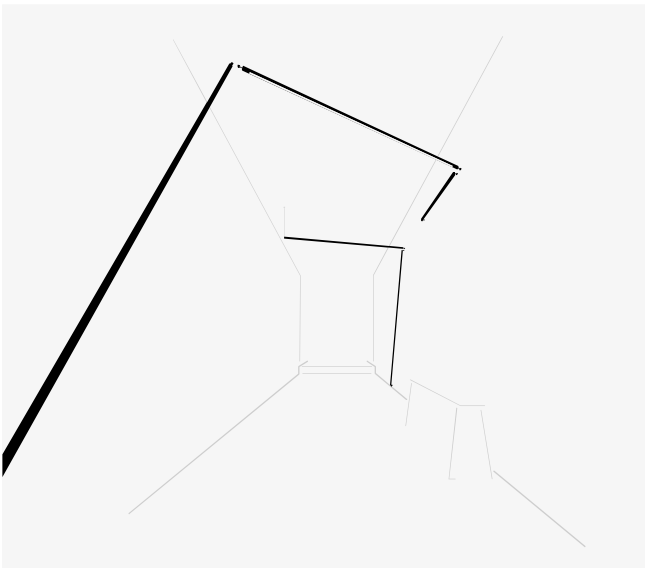


ST1081

Sketch composed by two compositions.

Composition 1:
3 Sticks: 1 x 150 cm, 1 x 200 cm, 1 x 300 cm. Total 6,5 m.
LED 4000 K. 15431 lm. 114,4 W.
Remote driver-Trimless canopy. 1-10V.

Composition 2:
2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Remote driver-Trimless canopy. 1-10V.

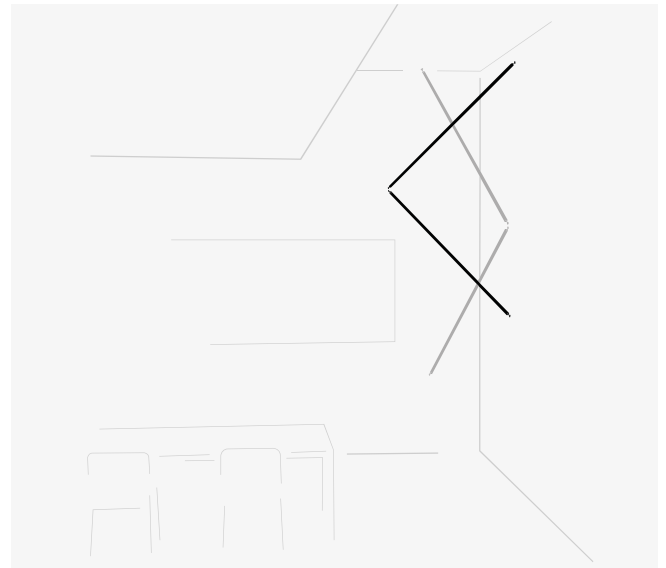

ST1091


Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 2700 K. 8692 lm. 70,4 W.
Remote driver-Trimless canopy. 1-10V.

Sticks Connectable


Next sketches are composed by one or more compositions

Some sticks are attached to the Wall

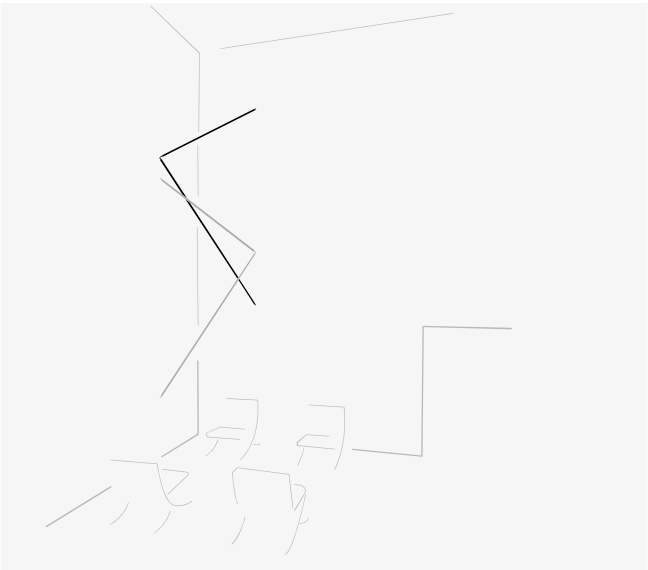

STI095
Sketch composed by two identical compositions.


Each composition:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Remote driver-Trimless canopy. 1-10V.

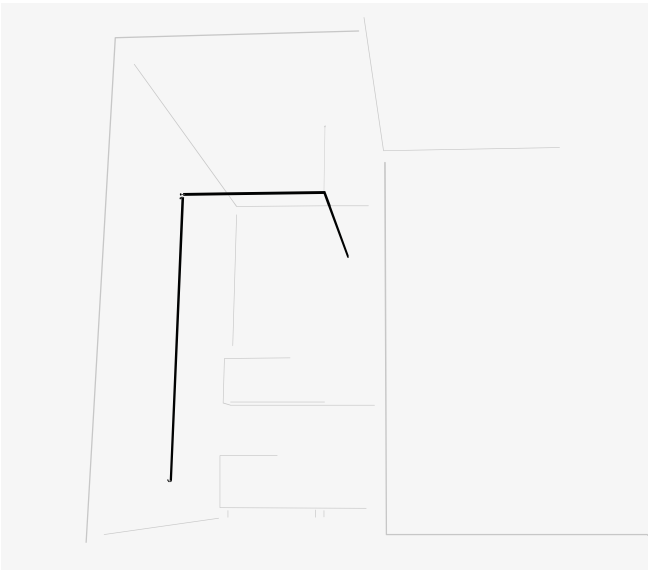

STI101
Sketch composed by two compositions.


Composition 1:
2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Remote driver-Trimless canopy. 1-10V.

Composition 2:
1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Remote driver-Trimless canopy. 1-10V.

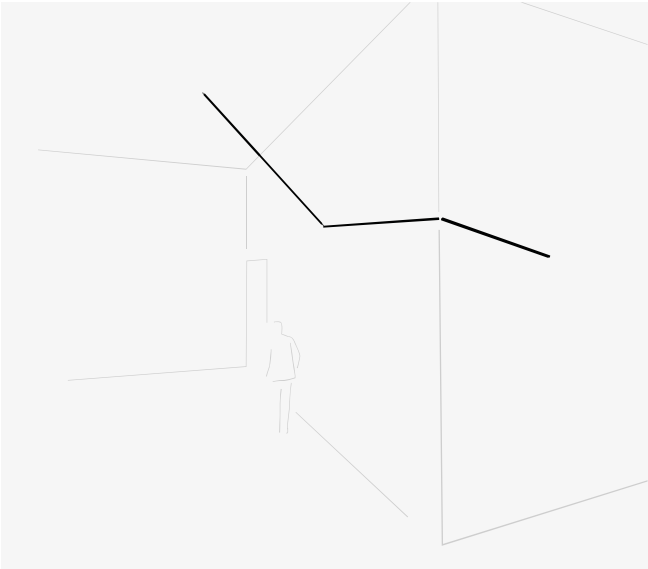

STI105
Sketch composed by only one composition.


3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Floor base & plug. Push.

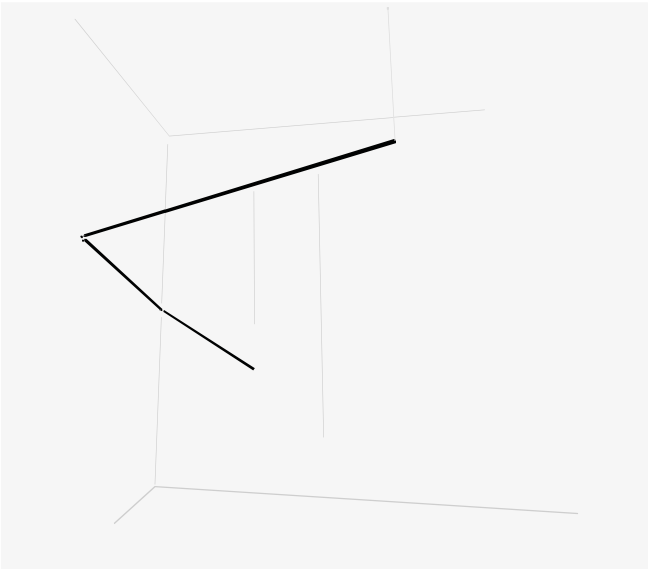

STI111
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver-Trimless canopy. 1-10V.


Sticks

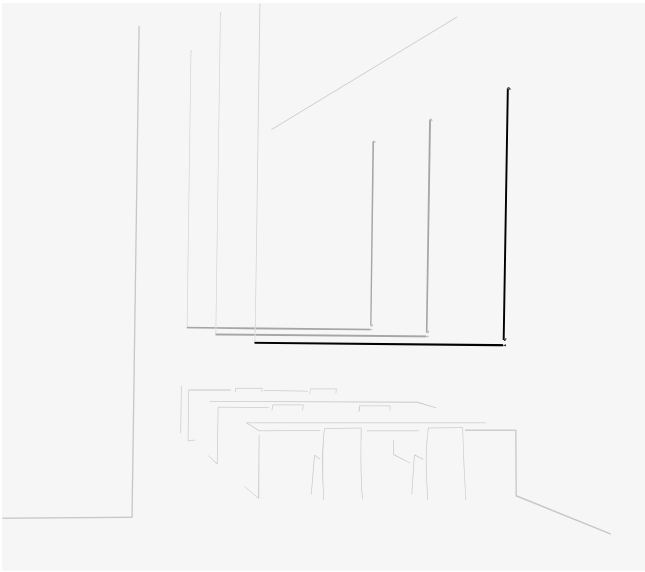

STI115

Sketch composed by three identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 4000 K. 9496 lm. 70,4 W.
Built-in disc S canopy. 1-10V.

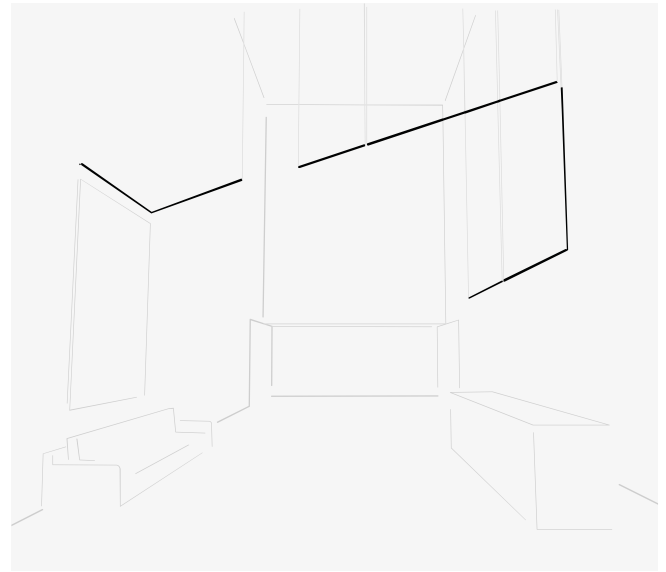

STI131


Sketch composed by four compositions.

Composition 1:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver-Trimless canopy. 1-10V.

Composition 3:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver-Trimless canopy. 1-10V.

Composition 2:
1 Stick: 1 x 150 cm. Total 1,5 m.
LED 4000 K. 3561 lm. 26,4 W.
Remote driver-Trimless canopy. 1-10V.

Composition 4:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver-Trimless canopy. 1-10V.

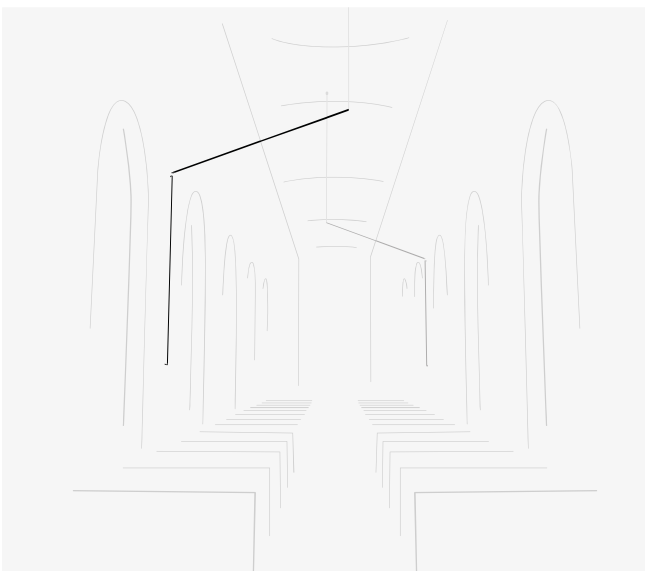

STI141


Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions


Some sticks are attached to the Wall

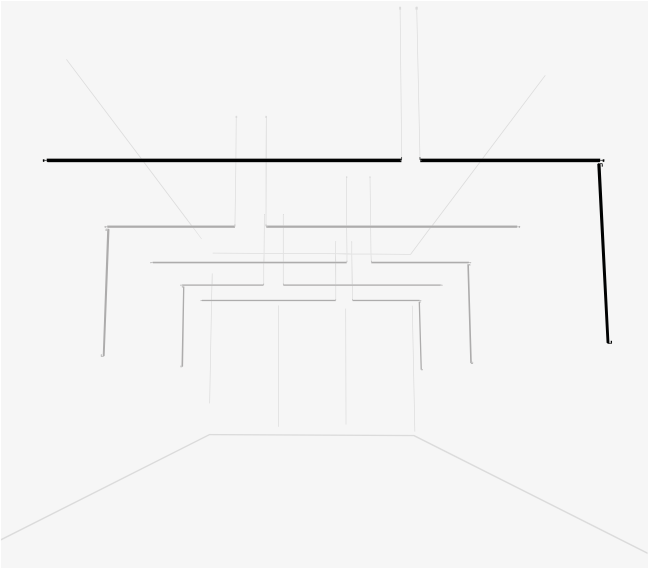

ST1145
Sketch composed by five identical compositions.

Each composition:
3 Sticks: 1 x 300 cm, 2 x 150 cm . Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver-Trimless canopy. 1-10V


Some sticks are on the Floor

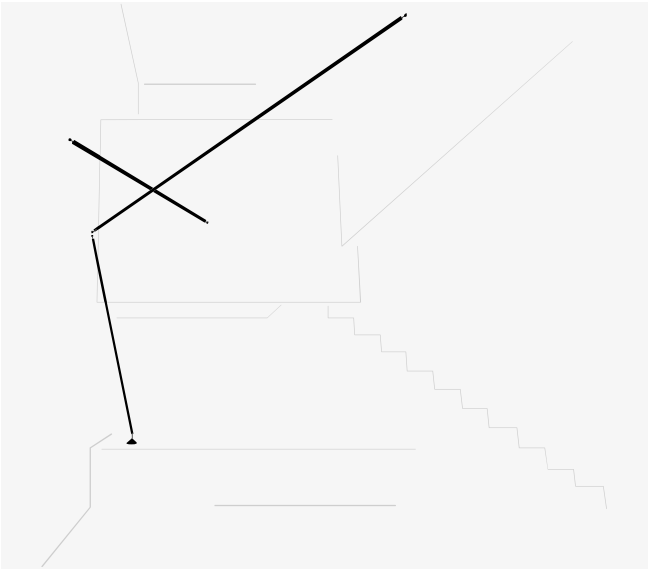

ST1151
Sketch composed by two compositions.

Composition 1:
1 Stick: 1 x 150 cm. Total 1,5 m.
LED 2700 K. 3260 lm. 26,4 W.
Remote driver-Trimless canopy. 1-10V.


Composition 2:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver-Trimless canopy. 1-10V.

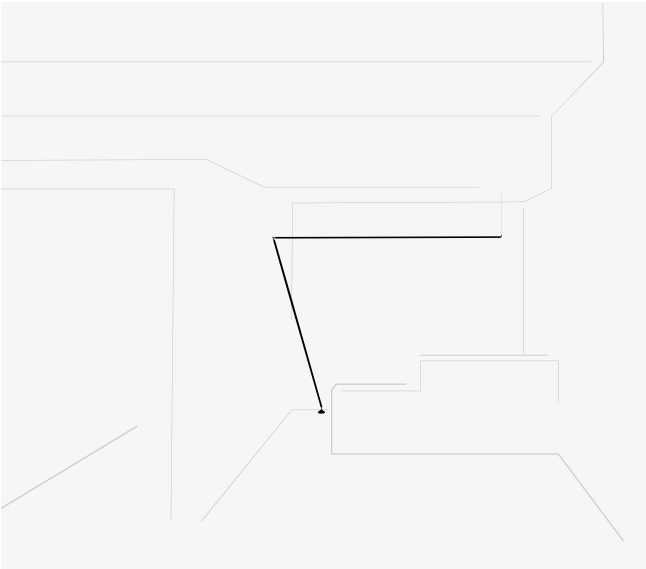

ST1155
Sketch composed by only one composition.

2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Floor base & plug. Push.

Sticks

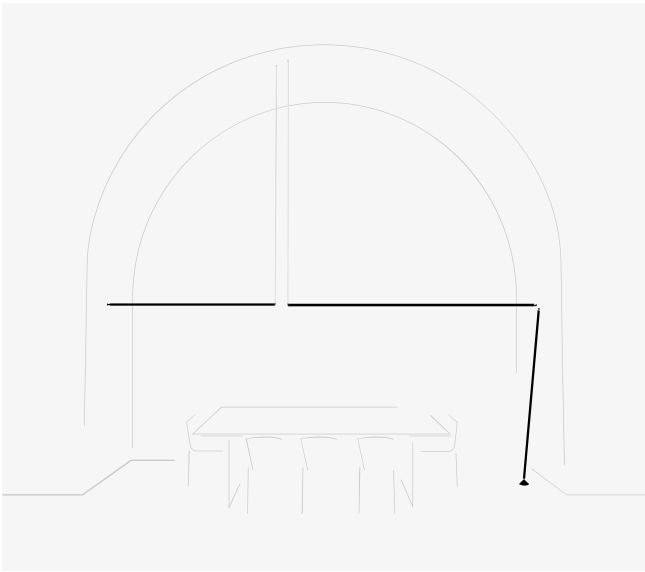

ST1161


Sketch composed by two compositions.

Composition 1:

1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4336 lm. 35,2 W.
Remote driver-Trimless canopy.
1-10V.

Composition 2:

2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver-Trimless canopy.
1-10V.

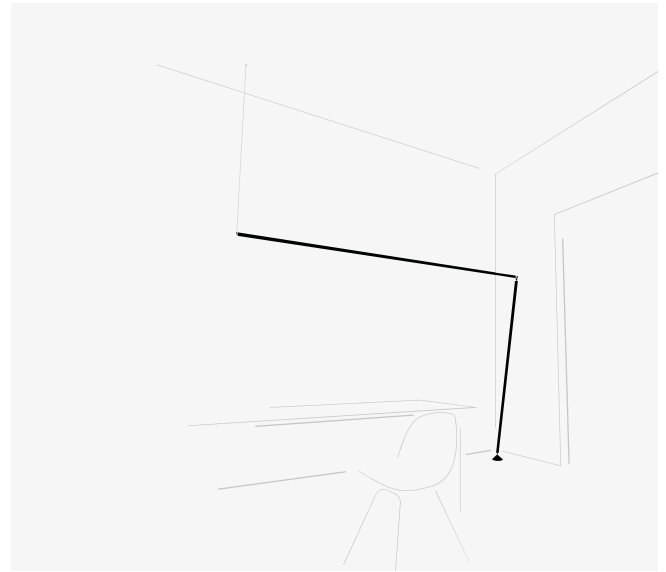

ST1165

Sketch composed by only one composition.

2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Floor base & plug. Push.



ST1171


Sketch composed by two compositions.

Composition 1:

3 Sticks: 3 x 200 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Surface canopy. 1-10V.

Composition 2:

2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Surface canopy. 1-10V.

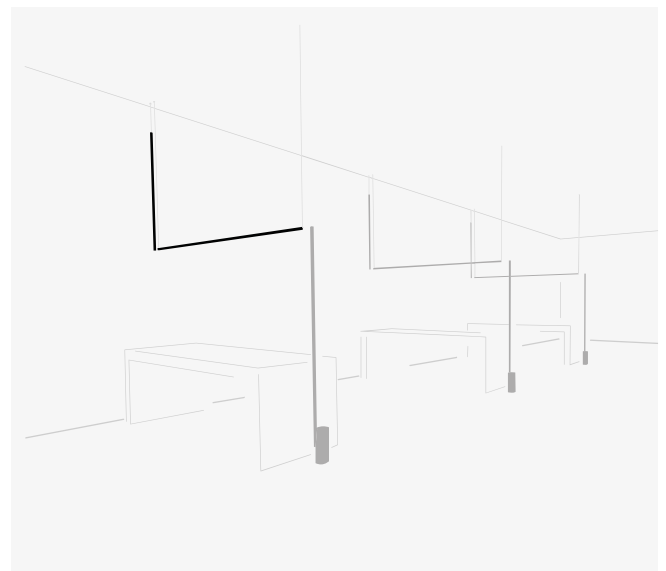

ST1175

Sketch composed by three identical compositions.

Each composition:

2 Sticks: 1 x 150 cm, 1 x 200 cm. Total 3,5 m.
LED 4000 K. 8309 lm. 61,6 W.
Surface canopy. 1-10V.



Each project is unique.
Visit vibia.com and chose among
multiple compositions designed
and adapted to your project needs.

Personalize your own Sticks composition
quick and easy a at vibia.com.

Sticks Connectable

Elements to be configured

Wall-Wall / Ceiling-Ceiling
Wall-Wall (corner) / Wall-Ceiling
Wall-Pendant
Pendant-Pendant
Pendant-Ceiling
Pendant

Sticks 1,5 m.
7300 7310 7320 7330 7350
1 x LED STRIP 26,4 W 24V. 
/1 M 2700 K. CRI >90. 3260 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 3561 lm. 134 lm/W.
Net Weight 0,9 Kg.

Sticks 2 m.
7303 7313 7323 7333 7353
1 x LED STRIP 35,2 W 24V. 
/1 M 2700 K. CRI >90. 4346 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 4748 lm. 134 lm/W.
Net Weight 1,2 Kg.

Sticks 3 m.
7306 7316 7326 7336 7356
1 x LED STRIP 52,8 W 24V. 
/1 M 2700 K. CRI >90. 6519 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 7122 lm. 134 lm/W.
Net Weight 1,8 Kg.

Sticks: Aluminum.
Diffuser: Polycarbonate.

Driver and Dimming depends on selected installation accessory (see page 27).

Suspension cables up to 3m. for
Wall - Pendant and Pendant-Pendant.

Personalization options available
- LED 3000 K.
- Extra cable length for Wall - Pendant
and Pendant - Pendant.
Min. quantity, upcharge and extra lead
time apply.

11 /1 M Black
(NCS S 8500-N)

11 /4 M Black
(NCS S 8500-N)



Horizontal pendant version with
a UGR index <19 available.
Request more information.
Available from September.

Floor-Wall

Sticks 1,5 m.
7340
1 x LED STRIP 26,4 W 24V. 
/1 M 2700 K. CRI >90. 3260 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 3561 lm. 134 lm/W.
Net Weight 1,5 Kg.

Sticks 2 m.
7343
1 x LED STRIP 35,2 W 24V. 
/1 M 2700 K. CRI >90. 4346 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 4748 lm. 134 lm/W.
Net Weight 1,8 Kg.

Sticks 3 m.
7346
1 x LED STRIP 52,8 W 24V. 
/1 M 2700 K. CRI >90. 6519 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 7122 lm. 134 lm/W.
Net Weight 2,4 Kg

Sticks: Aluminum.
Diffuser: Polycarbonate.

Driver and Dimming depends on selected installation accessory (see page 27).

Personalization options available
- LED 3000 K.
Min. quantity, upcharge and extra lead
time apply.

11 /1 M Black
(NCS S 8500-N)

11 /4 M Black
(NCS S 8500-N)

Sticks

Installation types



Floor base & plug




Surface canopy



Built-in disc S



Remote driver- Trimless




Floor base & plug
ACST000001 ACST000002
Driver Constant Voltage 24V.
200-240V. 50/60Hz.
Dimming: Push.

Materials
Body: Steel.

Packaging
1 Box /
0,16 x 0,16 x 0,4 m.
Vol. 0,01 m³.
Gross weight 8,5 Kg.
Net weight 7 Kg.

11 Black
(NCS S 8500-N)




Surface canopy
ACST000003 ACST000004
Driver Constant Voltage 24V.
90-305V. 50/60Hz.
Dimming: 1-10V.

Personalization options available
- Dimming: DALI, Casambi.
Min. quantity, upcharge and extra lead
time apply.

Materials
Body: Steel.

Packaging
1 Box /
0,50 x 0,25 x 0,25 m.
Vol. 0,03 m³.
Gross weight 2,9 Kg.
Net weight 2,5 Kg.

11 Black
(NCS S 8500-N)




Built-in disc S
ACST000005 ACST000006
Driver Constant Voltage 24V.
90-305V. 50/60Hz.
Dimming: 1-10V.

Personalization options available
- Dimming: DALI, Casambi.
Min. quantity, upcharge and extra lead
time apply.

Materials
Body: Steel.

Packaging
1 Box /
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)



Remote driver- Trimless
ACST000007 ACST000008
Driver Constant Voltage 24V.
90-305V. 50/60Hz.
Dimming: 1-10V.

Personalization options available
- Dimming: DALI, Casambi.
Min. quantity, upcharge and extra lead
time apply.

Materials
Body: Steel.

Packaging
1 Box /
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)





SticksStand-alone


Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

Floor

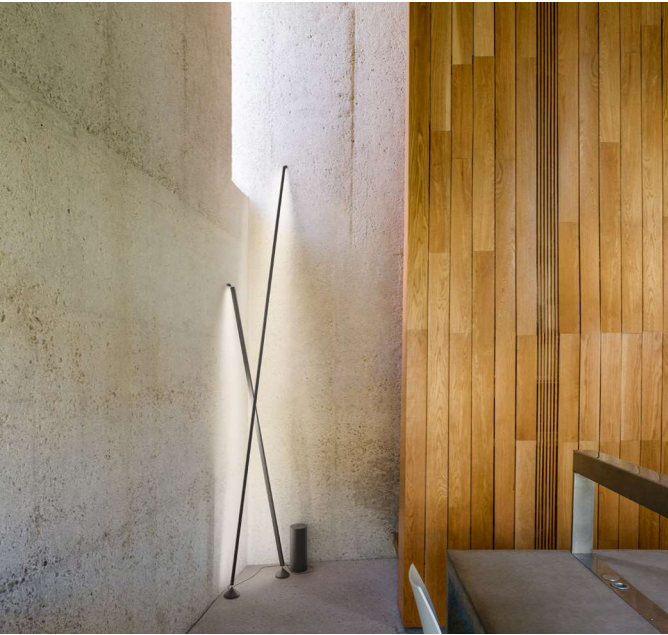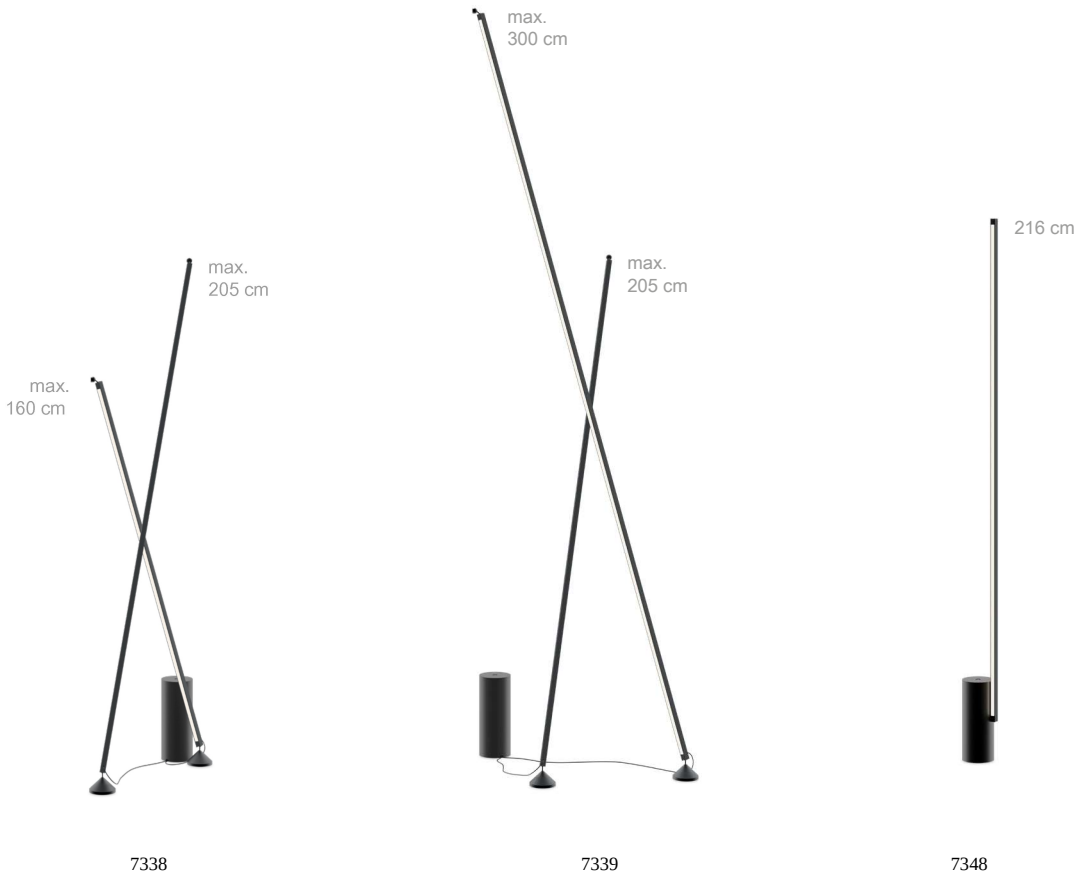

7338

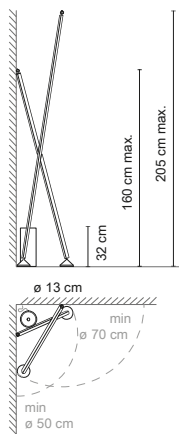

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED temperature colour

/1 _	2700 K	
	CRI >90	7606 lm 123 lm/W
/2 _	3000 K	
	CRI >90	7606 lm 123 lm/W
/4 _	4000 K	
	CRI >90	8309 lm 134 lm/W

Control

7338 _ _ / _ 5
Push

Materials

Sticks: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics


1 x LED STRIP 26,4 W 24V
1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0414 m³
Gross weight 14,2 Kg Net weight 9,7 Kg



7339

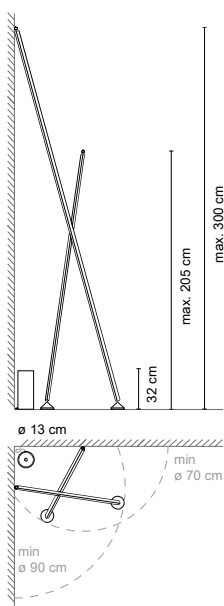

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED temperature colour

/1 _	2700 K	
	CRI >90	10865 lm 123 lm/W
/2 _	3000 K	
	CRI >90	7606 lm 123 lm/W
/4 _	4000 K	
	CRI >90	11870 lm 134 lm/W

Control

7339 _ _ / _ 5
Push

Materials

Sticks: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics


1 x LED STRIP 35,2 W 24V
1 x LED STRIP 52,8 W 24V
Constant Voltage 24V
200-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,057 m³
Gross weight 16,6 Kg Net weight 10,6 Kg



7348



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED temperature colour

/1 _	2700 K	
	CRI >90	4346 lm 123 lm/W
/2 _	3000 K	
	CRI >90	3511 lm 133 lm/W
/4 _	4000 K	
	CRI >90	4748 lm 134 lm/W

Control

7348 _ _ / _ 5
Push

Materials

Sticks: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics

1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0166 m³
Gross weight 8,8 Kg Net weight 8,4 Kg

