

EMPTY

Design by Xuclà.

VIBIA
LIGHT IS CREATION

Reference

4125.

Application

Outdoor lamps

Installation type

Surface

Description

Empty is an outdoor lamp that boasts different functions, where matter and light are integrated in a single body. Empty is a sculpture by day and will surprise you with the light it gives off at night. Designed by Xuclà. Available in finish: concrete polymer grey.

Diffuser


Polycarbonate diffuser

Finish



4125-18.
Lacquered
concrete grey

Sketch



Electrical characteristics

2 x LED STRIP 24V 8,6W

Total 17.2 W



Physical characteristics

1 Box / 0.56 x 0.56 x 0.56 m. / Vol. 0.1760 m³ /
Gross weight 40.0 kg. / Net weight 36.0 kg.

Installation and assembly

Please, see the installation manual

Light distribution

Ground lighting


Reduced-height outdoor lamp to shade light on the ground.



Photometric data

Efficiency : 53.22%
Coordinate system : CG
Total flux : 1247.24 lm
Maximum value : 245.05 cd/klm
Light position : C=225.00 G=10.00
Symmetry on the planes : Asymmetric

Isolux : Isolux (Floor)
Light position :
X=0.00m Y=0.00m Z=0.45m

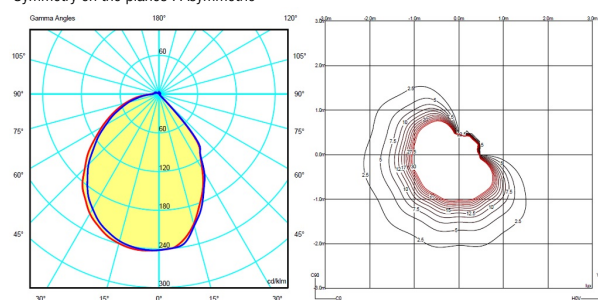

Certificates



EMPTY

Design by Xuclà.

VIBIA
LIGHT IS CREATION

Reference

4130.

Application

Outdoor lamps

Installation type

Surface

Description

Empty is an outdoor lamp that boasts different functions, where matter and light are integrated in a single body. Empty is a sculpture by day and will surprise you with the light it gives off at night. Designed by Xuclà. Available in concrete polymer grey.

Diffuser


Polycarbonate diffuser

Finish



4130-18.
Lacquered
concrete grey


Sketch



Electrical characteristics

2 x LED STRIP 24V 8,6W

Total 17.2 W



Physical characteristics

1 Box / 0.56 x 0.56 x 0.81 m. / Vol. 0.2540 m³ /
Gross weight 54.7 kg. / Net weight 49.7 kg.

Installation and assembly

Please, see the installation manual

Light distribution

Ground lighting


Reduced-height outdoor lamp to shade light on the ground.



Photometric data

Efficiency : 53.22%
Coordinate system : CG
Total flux : 1247.24 lm
Maximum value : 245.05 cd/klm
Light position : C=225.00 G=10.00
Symmetry on the planes : Asymmetric

Isolux : Isolux (Floor)
Light position :
X=0.00m Y=0.00m Z=0.70m

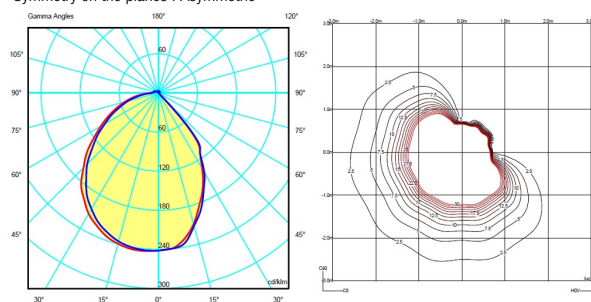

Certificates



EMPTY

Design by Xuclà.

VIBIA
LIGHT IS CREATION

Reference

4135.

Application

Outdoor lamps

Installation type

Surface

Description

Empty is an outdoor lamp that boasts different functions, where matter and light are integrated in a single body. Empty is a sculpture by day and will surprise you with the light it gives off at night. Designed by Xuclà. Available in concrete polymer grey.

Diffuser


Polycarbonate diffuser

Finish



4135-18.
Lacquered
concrete grey

Sketch




Electrical characteristics

2 x LED STRIP 24V 4,3W



Total 8.6 W



Physical characteristics

1 Box / 0.36 x 0.36 x 0.36 m. / Vol. 0.0482 m³ /
Gross weight 12.6 kg. / Net weight 11.3 kg.

Installation and assembly

Please, see the installation manual

Light distribution

Ground lighting


Reduced-height outdoor lamp to shade light on the ground.



Photometric data

Efficiency : 53.60%
Coordinate system : CG
Total flux : 566.80 lm
Maximum value : 257.32 cd/klm
Light position : C=195.00 G=5.00
Symmetry on the planes : Asymmetric

Isolux : Isolux (Floor)
Light position :
X=0.00m Y=0.00m Z=0.25m

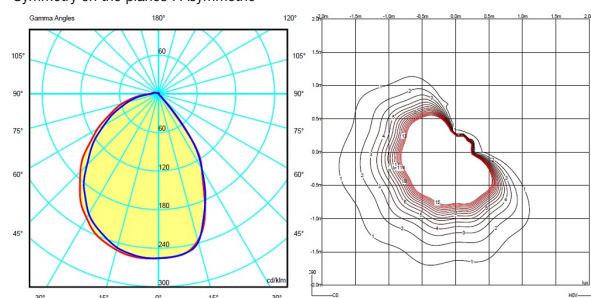

Certificates



EMPTY

Design by Xuclà.

VIBIA
LIGHT IS CREATION

Reference

4136.

Application

Outdoor lamps

Installation type

Surface

Description

Empty is an outdoor lamp that boasts different functions, where matter and light are integrated in a single body. Empty is a sculpture by day and will surprise you with the light it gives off at night. Designed by Xuclà. Available in concrete polymer grey.

Diffuser


Polycarbonate diffuser

Finish



4136-18.
Lacquered
concrete grey

Sketch



Electrical characteristics

2 x LED STRIP 24V 4,3W



Total 8.6 W



Physical characteristics

1 Box / 0.36 x 0.36 x 0.65 m. / Vol. 0.0840 m³ /
Gross weight 22.0 kg. / Net weight 19.0 kg.

Installation and assembly

Please, see the installation manual

Light distribution

Ground lighting


Reduced-height outdoor lamp to shade light on the ground.



Photometric data

Efficiency : 53.60%
Coordinate system : CG
Total flux : 566.80 lm
Maximum value : 257.32 cd/klm
Light position : C=195.00 G=5.00
Symmetry on the planes : Asymmetric

Isolux : Isolux (Floor)
Light position :
X=0.00m Y=0.00m Z=0.55m

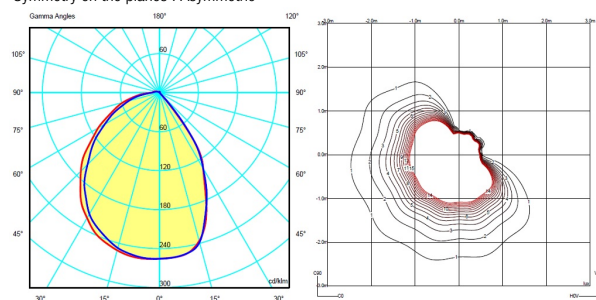

Certificates

