

HALO

Design by Martin Azua.

VIBIA
LIGHT IS CREATION

Reference

2330.

Application

Hanging lamps

Installation type

Surface

Description

HALO is a circular hanging lamp, which creates subtle, magical lighting. Designed by Martín Azúa, it is available in matt white lacquer.

Diffuser


Methacrylate diffuser

Finish



2330-03.
Matt white
lacquer


Sketch

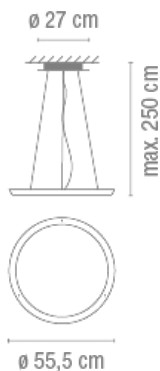

Electrical characteristics

1 x LED STRIP 24V 23,7W

Total 23.7 W



Physical characteristics

1 Box / 0.12 x 0.65 x 0.65 m. / Vol. 0.1559 m³ /
Gross weight 6.5 kg. / Net weight 5.9 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 75.93%

Coordinate system : CG

Total flux : 2085.85 lm

Maximum value : 106.22 cd/klm


Light position : C=45.00 G=55.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00 Y=0.00 Z=3.00m

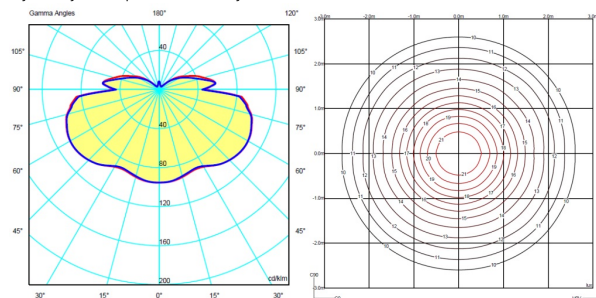

Certificates



HALO

Design by Martín Azúa.

VIBIA
LIGHT IS CREATION

Reference

2331.

Application

Hanging lamps

Installation type

Surface

Description

HALO is a hanging lamp with two circular pieces, which creates subtle, magical lighting. Designed by Martín Azúa, it is available in matt white lacquer.

Diffuser


Methacrylate diffuser

Finish



2331-03.
Matt white
lacquer


Sketch

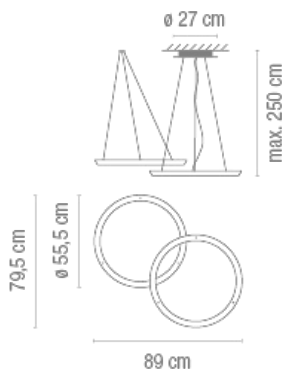

Electrical characteristics

2 x LED STRIP 24V 23,7W

Total 47.4 W



Physical characteristics

1 Box / 0.27 x 0.76 x 0.76 m. / Vol. 0.1559 m³ /
Gross weight 10.3 kg. / Net weight 6.3 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 75.90%

Coordinate system : CG

Total flux : 4171.70 lm

Maximum value : 106.19 cd/klm


Light position : C=10.00 G=60.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

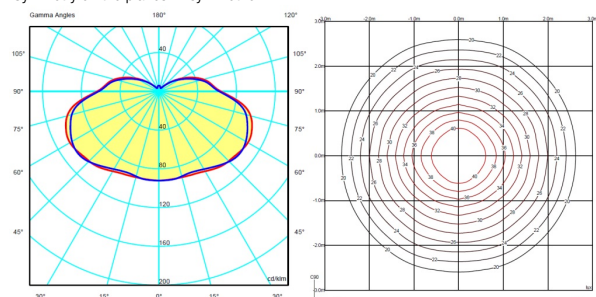

Certificates



HALO

Design by Martín Azúa.

VIBIA
LIGHT IS CREATION

Reference

2332.

Application

Hanging lamps

Installation type

Surface

Description

HALO is a hanging lamp with three circular pieces, which creates subtle, magical lighting. Designed by Martín Azúa, it is available in matt white lacquer.

Diffuser


Methacrylate diffuser

Finish



2332-03.
Matt white
lacquer

Sketch



Electrical characteristics

3 x LED STRIP 24V 23,7W

Total 71.1 W



Physical characteristics

1 Box / 0.36 x 0.65 x 0.65 m. / Vol. 0.1968 m³ /
Gross weight 11.4 kg. / Net weight 10.3 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 75.90%

Coordinate system : CG

Total flux : 6257.55 lm

Maximum value : 106.19 cd/klm


Light position : C=10.00 G=60.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

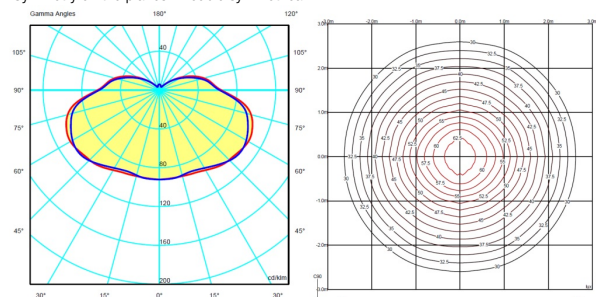

Certificates



HALO

Design by Martín Azúa.

VIBIA
LIGHT IS CREATION

Reference

2333.

Application

Hanging lamps

Installation type

Surface

Description

HALO is a hanging lamp with circular pieces, which creates subtle, magical lighting. Designed by Martín Azúa, it is available in matt white lacquer.

Diffuser


Methacrylate diffuser

Finish



2333-03.
Matt white
lacquer


Sketch

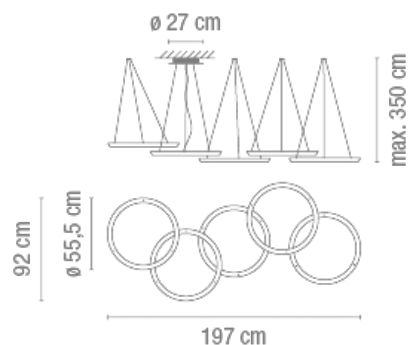

Electrical characteristics

5 x LED STRIP 24V 23,7W

Total 118.5 W



Physical characteristics

1 Box / 0.60 x 0.65 x 0.65 m. / Vol. 0.1968 m³ /
Gross weight 23.8 kg. / Net weight 13.8 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 75.90%

Coordinate system : CG

Total flux : 10429.25 lm

Maximum value : 106.19 cd/klm


Light position : C=10.00 G=60.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

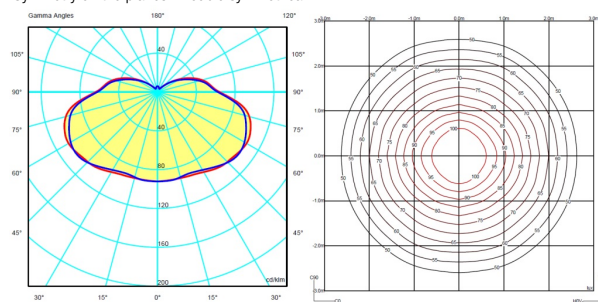

Certificates

