

MAYFAIR

Design by Diego Fortunato.

VIBIA
LIGHT IS CREATION

Reference

5500.

Application

Table Lamps

Installation type

Surface

Description

The Mayfair lamps are a Diego Fortunato design proposal. The entire Mayfair collection incorporates LED lighting and comes in various finishes: green and orange.

Diffuser

Polycarbonate diffuser

Finish




5500-07.

Gloss black
nickel and
green

5500-08.

Gloss black
nickel and
orange

Sketch



Electrical characteristics

1 x LED STRIP 24V 2,4W
AND
1 x LED STRIP 24V 16,8W

Total 19.2 W



Physical characteristics

1 Box / 0.22 x 0.35 x 0.62 m. / Vol. 0.0473 m³ /
Gross weight 4.5 kg. / Net weight 4.1 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 26.31%

Coordinate system : CG

Total flux : 1840.50

Maximum value : 66.01


Light position : C=45.00 G=40.00

Symmetry on the planes : Asymmetric

Isolux : floor

Light position :

X=0.00m Y=0.00m Z=0.38m

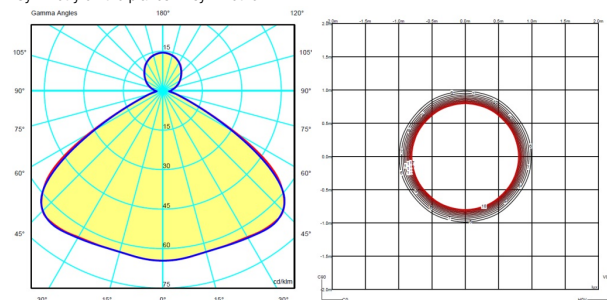

Certificates



MAYFAIR

Design by Diego Fortunato.

VIBIA
LIGHT IS CREATION

Reference

5505.

Application

Table Lamps

Installation type

Surface

Description

The Mayfair lamps are a Diego Fortunato design proposal. The entire Mayfair collection incorporates LED lighting and comes in various finishes: white, black, gold and copper.


Diffuser

Polycarbonate diffuser

Finish



Sketch



Electrical characteristics

1 x LED STRIP 24V 2,4W
AND
1 x LED STRIP 24V 16,8W

Total 19.2 W



Physical characteristics

1 Box / 0.22 x 0.35 x 0.62 m. / Vol. 0.0473 m³ /
Gross weight 4.9 kg. / Net weight 4.4 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Indirect lighting


Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 22.66%
Coordinate system : CG
Total flux : 1840.50
Maximum value : 68.63
Light position : C=40.00 G=42.00
Symmetry on the planes : Asymmetric

Isolux : floor
Light position :
X=0.00m Y=0.00m Z=0.38m

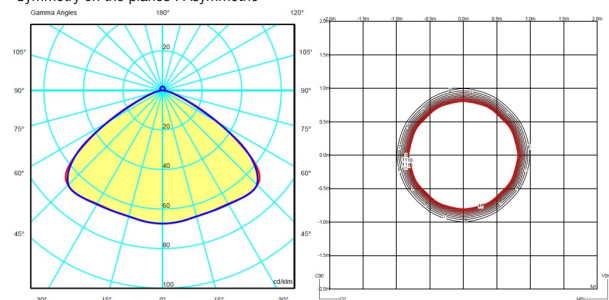

Certificates

