

SPARKS

Design by Arik Levy.

VIBIA
LIGHT IS CREATION

Reference

1715.

Application

Wall Lamps

Installation type

Surface

Description

Sparks is a surface wall lamp. Designed by Arik Levy Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements. Available in mink and graphite grey.

Diffuser

Polycarbonate diffuser

Finish




1715-18.

Matt graphite
lacquer

1715-59.

Matt mink
lacquer


Sketch



Electrical characteristics

1 x LED STRIP 30V 34,8W

Total 34.8 W



Physical characteristics

1 Box / 0.09 x 0.16 x 1.95 m. / Vol. 0.0243 m³ /
Gross weight 5.4 kg. / Net weight 4.9 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 67.83%

Coordinate system : CG

Total flux : 3670.00 lm

Maximum value : 328.61 cd/klm


Light position : C=270.00 G=170.00

Symmetry on the planes : Asymmetric

Isolux : Isolux (Ceiling)

Light position :

X=0.00m Y=0.00m Z=3.00m

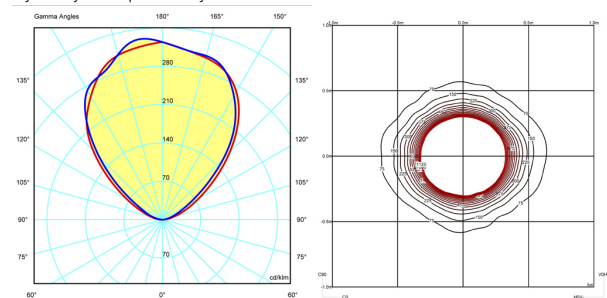

Certificates



SPARKS

Design by Arik Levy.

VIBIA
LIGHT IS CREATION

Reference

1705.

Application

Wall Lamps

Installation type

Surface

Description

Sparks is a surface wall lamp. Designed by Arik Levy Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements. Available in mink and graphite grey.

Diffuser

Polycarbonate diffuser

Finish




1705-18.

Matt graphite
lacquer

1705-59.

Matt mink
lacquer


Sketch

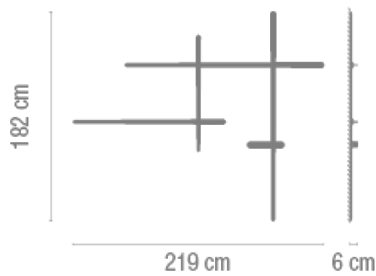

Electrical characteristics

1 x LED STRIP 30V 50,7W

Total 50.7 W



Physical characteristics

1 Box / 0.09 x 0.16 x 1.95 m. / Vol. 0.0243 m³ /
Gross weight 7.0 kg. / Net weight 6.3 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 67.83%

Coordinate system : CG

Total flux : 5300.00 lm

Maximum value : 324.84 cd/klm


Light position : C=210.00 G=170.00

Symmetry on the planes : Asymmetric

Isolux : Isolux (Ceiling)

Light position :

X=0.00m Y=0.00m Z=3.00m

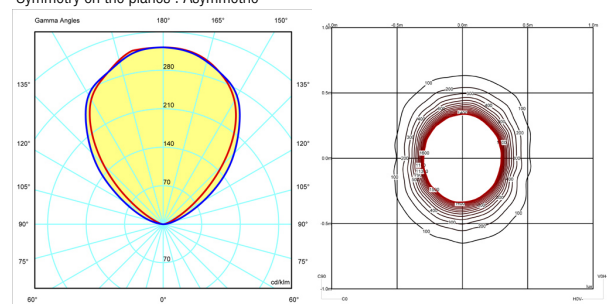

Certificates



SPARKS

Design by Arik Levy.

VIBIA
LIGHT IS CREATION

Reference

1700.

Application

Wall Lamps

Installation type

Surface

Description

Sparks is a surface wall lamp. Designed by Arik Levy Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements. Available in mink and graphite grey.

Diffuser

Polycarbonate diffuser

Finish




1700-18.

Matt graphite
lacquer

1700-59.

Matt mink
lacquer


Sketch

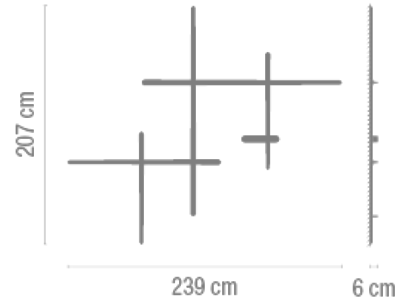

Electrical characteristics

1 x LED STRIP 30V 58,5W

Total 58,5 W



Physical characteristics

1 Box / 0.09 x 0.15 x 1.91 m. / Vol. 0.0243 m³ /
Gross weight 7.7 kg. / Net weight 6.9 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 67.82%

Coordinate system : CG

Total flux : 6116.00 lm

Maximum value : 325.09 cd/klm


Light position : C=330.00 G=170.00

Symmetry on the planes : Asymmetric

Isolux : Isolux (Ceiling)

Light position :

X=0.00m Y=0.00m Z=3.00m

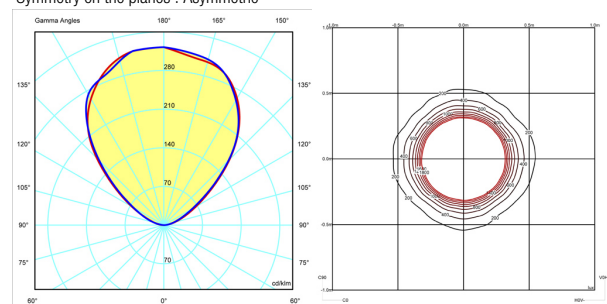

Certificates

