
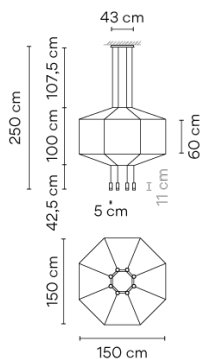


0299

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish  04 Black
RAL 9005

LED temperature color 2700 K / 3000 K / 3500 K

Dimming Casambi / Push; 1-10V; DALI-2

Installation type Surface Canopy



Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel

Light source 8 x LED 4,48W 350mA



LED CRI>90 3922 lm 109
2700 K / 3000 K / 3500 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ




Application Hanging lamps

Packaging 2 Box
1.633 m x 1.619 m x 0.086 m
Gross weight 18.2
Net weight 15.27
Vol. 0.3245

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency 40.11%
Coordinate System CG
Total Flux 3922.20
Maximum Value 53.86

Other Applications





0300

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	O4 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	8 x LED 4,48W 350mA
LED	CRI>90 3922 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ
Application	Hanging lamps
Packaging	2 Box 1,633 m x 1,619 m x 0,086 m Gross weight 17,4 Net weight 11,26 Vol. 0,3245

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	3922.20
Maximum Value	53.86

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

0301

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	04 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	8 x LED 4,48W 350mA D
LED	CRI>90 3922 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ F Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 1.158 m x 1.133 m x 0.086 m Gross weighth 14.4 Net weighth 11.08 Vol. 0.21

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	3922.20
Maximum Value	53.86

Other Applications





0302

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish  04 Black
RAL 9005

LED temperature color 2700 K / 3000 K / 3500 K

Dimming Casambi / Push; 1-10V; DALI-2

Installation type Surface Canopy


Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel

Light source 8 x LED 4,48W 350mA



LED CRI>90 3922 lm 109
2700 K / 3000 K / 3500 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ




Application Hanging lamps

Packaging 2 Box
0.6 m x 0.6 m x 0.27 m
Gross weight 12.5
Net weight 11.25
Vol. 0.1558

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency 40.11%
Coordinate System CG
Total Flux 3922.20
Maximum Value 53.86

Other Applications





0303

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish  O4 Black
RAL 9005

LED temperature color 2700 K / 3000 K / 3500 K

Dimming Casambi / Push; 1-10V; DALI-2

Installation type Surface Canopy



Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel

Light source 8 x LED 4,48W 350mA



LED CRI>90 3922 lm 109
2700 K / 3000 K / 3500 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ




Application Hanging lamps

Packaging 2 Box
0,6 m x 0,6 m x 0,27 m
Gross weight 11.9
Net weight 9.25
Vol. 0.1558

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency 40.11%
Coordinate System CG
Total Flux 2941.60
Maximum Value 53.87

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com



Wireflow

0304

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

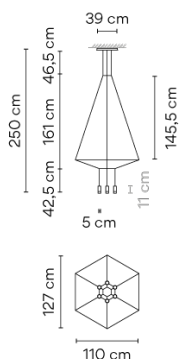

Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	 O4 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Casambi / Push; 1-10V; DALI-2

Installation type	Surface Canopy
-------------------	----------------

Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	6 x LED 4,48W 350mA 
LED	CR>80 2942 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ




Application	Hanging lamps
Packaging	2 Box 1,633 m x 1,619 m x 0,086 m Gross weight 13.9 Net weight 11.68 Vol. 0.3245

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	2941.60
Maximum Value	53.87

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

0305

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

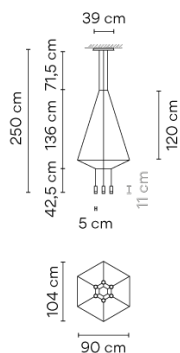

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]


Finish	 O4 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel Ceiling rose: Steel
Light source	6 x LED 4,48W 350mA 
LED	CRI>80 2942 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ   Dimmable LED   IP20 Bi-volt 50-60Hz

Application	Hanging lamps
Packaging	2 Box 1.158 m x 1.133 m x 0.086 m Gross weight 11.1 Net weight 9.99 Vol. 0.21

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	2941.60
Maximum Value	53.87

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

0306

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with six LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	04 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel Ceiling rose: Steel
Light source	6 x LED 4,48W 350mA D
LED	CRI>80 2942 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 1.158 m x 1.133 m x 0.086 m Gross weight 11 Net weight 9.9 Vol. 0.21

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	2941.60
Maximum Value	53.87

Other Applications





0307

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	O4 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	6 x LED 4,48W 350mA
LED	CRI>80 2942 lm 108 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ
Application	Hanging lamps
Packaging	2 Box 0,6 m x 0,6 m x 0,27 m Gross weight 9,6 Net weight 8,64 Vol. 0.1558

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	2941.60
Maximum Value	53.87

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

0308

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	O4 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	6 x LED 4,48W 350mA
LED	CRI>80 2942 lm 163 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ
Application	Hanging lamps
Packaging	2 Box 0,6 m x 0,6 m x 0,27 m Gross weight 8,4 Net weight 7,56 Vol. 0.1238

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	2941.60
Maximum Value	53.87

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

0309

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

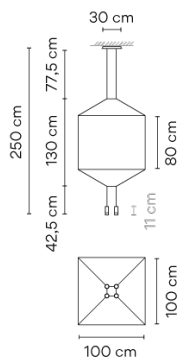


Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	O4 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	4 x LED 4,48W 350mA
LED	CRI>90 1961 lm 108 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 1.158 m x 1.133 m x 0.086 m Gross weight 10.4 Net weight 8.86 Vol. 0.1569

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	1961
Maximum Value	53.86

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

0310

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

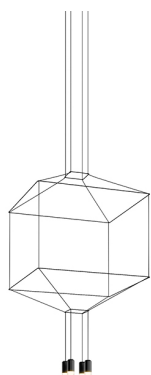**Optional : Extra cable length**

Min. quantity, upcharge and extra lead time apply [EN]

Finish  04 Black
RAL 9005

LED temperature color 2700 K / 3000 K / 3500 K

Dimming Push; 1-10V; DALI-2 / Casambi

Installation type Surface Canopy


Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel

Light source 4 x LED 4,48W 350mA



LED CRI>90 1961 lm 108
2700 K / 3000 K / 3500 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ




Application Hanging lamps


Packaging 2 Box
1.158 m x 1.133 m x 0.086 m
Gross weight 9.8
Net weight 8.32
Vol. 0.1569

Lighting effect**General Lighting**

Lamp for general lighting that equally distributes the light in all directions.

**Photometric Data**

Efficiency 40.11%
Coordinate System CG
Total Flux 1961
Maximum Value 53.86



Other Applications

0311

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with four LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	04 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	4 x LED 4,48W 350mA
LED	CRI>90 1961 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ F Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 0.833 m x 0.819 m x 0.086 m Gross weight 8.5 Net weight 7.15 Vol. 0.1027

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	1961
Maximum Value	53.86

Other Applications





0312

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with four LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

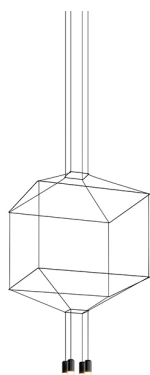


Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	O4 Black RAL 9005
LED temperature color	2700 K / 3000 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	4 x LED 4,48W 350mA
LED	CRI>90 1961 lm 109 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 0,833 m x 0,819 m x 0,086 m Gross weight 8,3 Net weight 6,97 Vol. 0,1027

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	40.11%
Coordinate System	CG
Total Flux	1961
Maximum Value	53.86

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

0313

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish 04 Black
RAL 9005

LED temperature color 2700 K / 3000 K

Dimming Casambi / Push; 1-10V; DALI-2

Installation type Surface Canopy


Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel

Light source 4 x LED 4,48W 350mA



LED CRI>80 1961 lm 109
2700 K / 3000 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ




Application Hanging lamps

Packaging 2 Box
0.42 m x 0.42 m x 0.25 m
Gross weight 6.8
Net weight 5.62
Vol. 0.0707

Lighting effect

General Lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric Data



Efficiency 40.11%
Coordinate System CG
Total Flux 1961
Maximum Value 53.86

Other Applications





Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

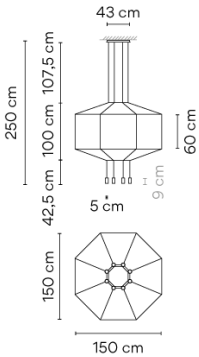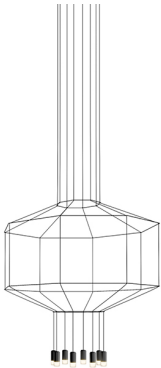

Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K / 3000 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	8 x LED 4,48W 350mA 
LED	CRI>80 3922 lm 109 2700 K / 3000 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ   Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 1.633 m x 1.619 m x 0.086 m Gross weighth 17.1 Net weighth 14.27 Vol. 0.3245



Lighting effect	
General Lighting	Lamp used to highlight a specific element. 
Photometric Data	
Efficiency	46.23%
Coordinate System	CG
Total Flux	3922.20
Maximum Value	320.25
Other Applications	

0400

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

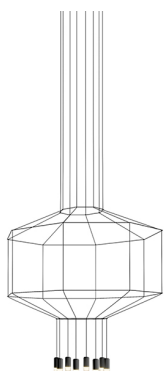

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish  04 Black
RAL 9005

LED temperature color 2700 K / 3000 K

Dimming Push; 1-10V; DALI-2 / Casambi

Installation type Surface Canopy

Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel
Ceiling rose: Steel

Light source 8 x LED 4,48W 350mA



LED CRI>80 3922 lm 109
2700 K / 3000 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ




Application Hanging lamps

Packaging 2 Box
1.633 m x 1.619 m x 0.086 m
Gross weight 18
Net weight 15.06
Vol. 0.3245

Lighting effect

General Lighting


Lamp used to highlight a specific element.



Photometric Data

Efficiency 46.23%
Coordinate System CG
Total Flux 3922.20
Maximum Value 320.25

Other Applications





0401

Design By Arik Levy



Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

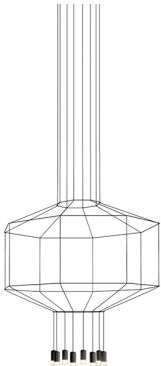

Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K / 3000 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	8 x LED 4,48W 350mA 
LED	CRI>80 3922 lm 109 2700 K / 3000 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ       
Application	Hanging lamps
Packaging	2 Box 1.158 m x 1.133 m x 0.086 m Gross weighth 14.2 Net weighth 12.08 Vol. 0.21



Lighting effect	
General Lighting	Lamp used to highlight a specific element. 
Photometric Data	
Efficiency	46.23%
Coordinate System	CG
Total Flux	3922.20
Maximum Value	320.25
Other Applications	

0402

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

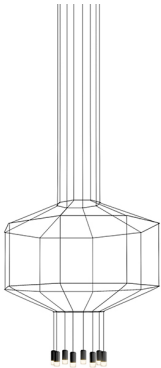


Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	8 x LED 4,48W 350mA 
LED	CRI>80 3922 lm 109 2700 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ       
Application	Hanging lamps
Packaging	2 Box 0.6 m x 0.6 m x 0.27 m Gross weighth 11.2 Net weighth 8.25 Vol. 0.1558

Lighting effect

General Lighting


Lamp used to highlight a specific element.



Photometric Data

Efficiency	46.23%
Coordinate System	CG
Total Flux	3922.20
Maximum Value	320.25

Other Applications





All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

0403

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

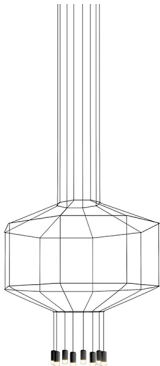

Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	04 Black RAL 9005
LED temperature color	2700 K / 3000 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	8 x LED 4,48W 350mA D
LED	CRI>80 3922 lm 109 2700 K / 3000 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ F Dimmable LED IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 0.6 m x 0.6 m x 0.27 m Gross weighth 11 Net weighth 9.25 Vol. 0.1558

Lighting effect

General Lighting

Lamp used to highlight a specific element.

Photometric Data

Efficiency	46.23%
Coordinate System	CG
Total Flux	3922.20
Maximum Value	320.25



Other Applications

0404

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

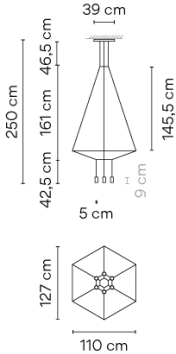


Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	6 x LED 4,48W 350mA 
LED	CRI>80 2942 lm 109 2700 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ       
Application	Hanging lamps
Packaging	2 Box 1.633 m x 1.619 m x 0.086 m Gross weighth 15.4 Net weighth 12.68 Vol. 0.3245

Lighting effect

General Lighting


Lamp used to highlight a specific element.



Photometric Data

Efficiency	46.23%
Coordinate System	CG
Total Flux	2941.60
Maximum Value	320.26

Other Applications





All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

0405

Design By Arik Levy



Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K
Dimming	Push; 1-10V; DALI-2 / Casambi
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	6 x LED 4,48W 350mA 
LED	CRI>80 2942 lm 109 2700 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ       
Application	Hanging lamps
Packaging	2 Box 1.158 m x 1.133 m x 0.086 m Gross weighth 11.1 Net weighth 9.99 Vol. 0.21



Lighting effect	
General Lighting	
Lamp used to highlight a specific element.	
Photometric Data	
Efficiency	46.23%
Coordinate System	CG
Total Flux	2941.60
Maximum Value	320.26
Other Applications	

0406

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with six LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

**Optional : Extra cable length**

Min. quantity, upcharge and extra lead time apply [EN]

Finish  04 Black
RAL 9005

LED temperature color 2700 K / 3000 K

Dimming Casambi / Push; 1-10V; DALI-2

Installation type Surface Canopy


Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel

Light source 6 x LED 4,48W 350mA



LED CRI>80 2942 lm 109
2700 K / 3000 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ




Application Hanging lamps


Packaging 2 Box
1.158 m x 1.133 m x 0.086 m
Gross weight 11
Net weight 9.9
Vol. 0.21

Lighting effect**General Lighting**

Lamp used to highlight a specific element.

**Photometric Data**

Efficiency 46.23%
Coordinate System CG
Total Flux 2941.60
Maximum Value 320.26



Other Applications

0407

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish  04 Black
RAL 9005

LED temperature color 2700 K / 3000 K

Dimming Push; 1-10V; DALI-2 / Casambi

Installation type Surface Canopy

Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel
Ceiling rose: Steel

Light source 6 x LED 4,48W 350mA



LED CRI>80 2942 lm 109
2700 K / 3000 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ




Application Hanging lamps

Packaging 2 Box
0.6 m x 0.6 m x 0.27 m
Gross weight 9.6
Net weight 8.64
Vol. 0.1558

Lighting effect

General Lighting


Lamp used to highlight a specific element.



Photometric Data

Efficiency 46.23%
Coordinate System CG
Total Flux 2941.60
Maximum Value 320.26

Other Applications





0408

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet




Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy
Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	6 x LED 4,48W 350mA 
LED	CRI>80 2942 lm 109 2700 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ       
Application	Hanging lamps
Packaging	2 Box 0.6 m x 0.6 m x 0.27 m Gross weighth 8.4 Net weighth 7.56 Vol. 0.1238

Lighting effect

General Lighting


Lamp used to highlight a specific element.



Photometric Data

Efficiency	46.23%
Coordinate System	CG
Total Flux	2941.60
Maximum Value	320.26

Other Applications





All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

0409

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet

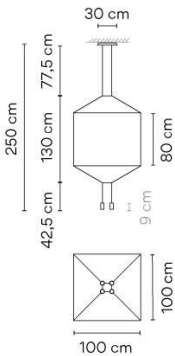

Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K / 3500 K
Dimming	Push; 1-10V; DALI-2 / Casambi

Installation type	Surface Canopy
-------------------	----------------


Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	4 x LED 4,48W 350mA 
LED	CRI>80 1961 lm 109 2700 K / 3500 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ
	  Dimmable 
	  

Application	Hanging lamps
Packaging	2 Box 1.158 m x 1.133 m x 0.086 m Gross weighth 9.9 Net weighth 6.86 Vol. 0.1569

Lighting effect	
General Lighting	Lamp used to highlight a specific element.



Photometric Data	
Efficiency	46.23%
Coordinate System	CG
Total Flux	1961.10
Maximum Value	320.25





0410

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time
apply [EN]

Finish	 04 Black RAL 9005
LED temperature color	2700 K
Dimming	Casambi / Push; 1-10V; DALI-2
Installation type	Surface Canopy


Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
Light source	4 x LED 4,48W 350mA 
LED	CRI>80 1961 lm 109 2700 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ   Dimmable    

Application	Hanging lamps
Packaging	2 Box 1.158 m x 1.133 m x 0.086 m Gross weighth 9,8 Net weighth 8.32 Vol. 0.1569


Lighting effect

General Lighting

Lamp used to highlight a specific element.



Photometric Data	
Efficiency	46.23%
Coordinate System	CG
Total Flux	1961.10
Maximum Value	320.25

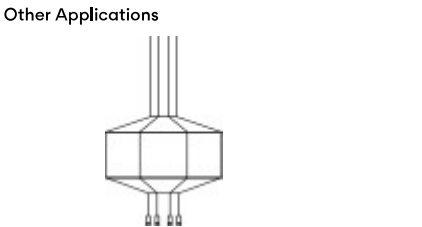



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

0411

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with four LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish 04 Black
RAL 9005

LED temperature color 2700 K / 3000 K

Dimming Push; 1-10V; DALI-2 / Casambi

Installation type Surface Canopy

Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel

Light source 4 x LED 4,48W 350mA



LED CRI>80 1961 lm 109
2700 K / 3000 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ



Dimmable

IP20

Bi-volt

50-60Hz


Application Hanging lamps

Packaging 2 Box
0.833 m x 0.819 m x 0.086 m
Gross weight 8.5
Net weight 7.15
Vol. 0.1027

Lighting effect

General Lighting


Lamp used to highlight a specific element.



Photometric Data

Efficiency 46.23%
Coordinate System CG
Total Flux 1961.10
Maximum Value 320.25

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

0412

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	O4 Black RAL 9005
LED temperature color	2700 K / 3000 K
Dimming	Casambi / Push; 1-10V; DALI-2

Installation type	Surface Canopy
-------------------	----------------


Materials	Ceiling rose: Steel Body: Aluminum Horizontal rods: Steel
-----------	---

Light source	4 x LED 4,48W 350mA
--------------	---------------------



LED	CRI>80 1961 lm 109 2700 K / 3000 K
-----	---------------------------------------

Driver	Constant Current 350 110~240 V V 50~60 Hz HZ
--------	---




Application	Hanging lamps
-------------	---------------

Packaging	2 Box 0,833 m x 0,819 m x 0,086 m Gross weight 8,3 Net weight 6,97 Vol. 0,1027
-----------	--

Lighting effect

General Lighting


Lamp used to highlight a specific element.



Photometric Data

Efficiency	46.23%
Coordinate System	CG
Total Flux	1961.10
Maximum Value	320.25

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970



customer.service@vibia.com
vibia.com

0413

Design By Arik Levy

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Model Sheet



Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish  O4 Black
RAL 9005

LED temperature color 2700 K / 3000 K

Dimming Casambi / Push; 1-10V; DALI-2

Installation type Surface Canopy


Materials Ceiling rose: Steel
Body: Aluminum
Horizontal rods: Steel

Light source 4 x LED 4,48W 350mA



LED CRI>80 1961 lm 109
2700 K / 3000 K

Driver Constant Current 350 110~240
V V 50~60 Hz HZ




Application Hanging lamps

Packaging 2 Box
0,42 m x 0,42 m x 0,25 m
Gross weight 6.8
Net weight 5.62
Vol. 0.0707

Lighting effect

General Lighting

Lamp used to highlight a specific element.



Photometric Data

Efficiency 46.23%
Coordinate System CG
Total Flux 1961.10
Maximum Value 320.25

Other Applications

