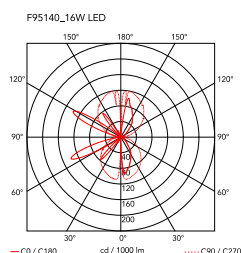# Wirering Pink

by Formafantasma , 2018

Indirect light wall lighting device with body in calendered, extruded aluminium with galvanised or varnished finish. The special tangent cable, in coloured rubber, provides the power. The cable is fixed to the wall with ABS joints in the same finish as the ring. Dimming via switch pedal on the cable. Power supply on adapter with interchangeable plugs. Useful cable length is 2.5 metres.

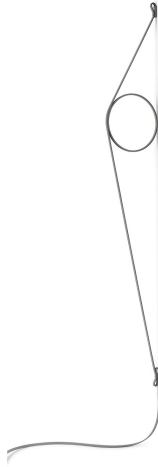|	
Mounting	Wall
Environment	Indoor
Weight	(ring 0,235kg + cable 0,710kg) = 0,945 Kg
Light sources available	x 180 LED 16W 2700K 1300lm CRI90 [i] DIMMER
Emergency	Without
Switching	no
Power	16W
Battery	No
Supply included	Yes
Cord Length	2,5m mm
Materials	Aluminum
Colors	F9514009 - Pink cable/White ring
	F9514020 - PInk cable/Grey ring
	F9514030 - Pink cable/Black ring
	F9514034 - Pink cable/Pink ring
	F9514044 - Pink cable/Gold ring
Certificate	CE ⬡03 IP20 ◇III

2080 mm ø 310 mm

320 mm

F95140_16W LED

150° 180° 150°
120° 120°
90° 90°
60° 60°
30° 0° 30°
120
160
200
— C0 / C180   cd / 1000 lm   ····· C90 / C270

Wirering Grey

by Formafantasma , 2018

Indirect light wall lighting device with body in calendered, extruded aluminium with galvanised or varnished finish. The special tangent cable, in coloured rubber, provides the power. The cable is fixed to the wall with ABS joints in the same finish as the ring. Dimming via switch pedal on the cable. Power supply on adapter with interchangeable plugs. Useful cable length is 2.5 metres.

Mounting	Wall
Environment	Indoor
Weight	(ring 0,235kg + cable 0,710kg) = 0,945 Kg
Light sources available	x 180 LED 16W 2700K 1300lm CRI90 [i] DIMMER
Emergency	Without
Switching	no
Power	16W
Battery	No
Supply included	Yes
Cord Length	2,5m mm
Materials	Aluminum
Colors	◯ 9513009 - Grey cable/White ring
	◓ 9513020 - Grey cable/Grey ring
	● 9513030 - Grey cable/Black ring
	● F9513034 - Grey cable/Pink ring
	● 9513044 - Grey cable/Gold ring
Certificate	CE ⊘03 IP20 III

2080 mm
ø 310 mm
320 mm

F95130_16W LED

150° 180° 150°
120° 120°
90° 90°
60° 60°
30° 0° 30°
120
160
200

— C0 / C180   cd / 1000 lm   ····· C90 / C270