

Date

---



---

Name

---



---

Client

---



---

Project name

---



---

Quote#

---



---

Type/Quantity

---





---

17/11/2020 14:30:22

### DEEP RINGO S1 202 11 16

[Weblink](#)



Cutout shape/size:  76 mm


Recessed depth: 100 mm

Thickness of mounting surface: max.15

Available colors: ALUMINIUM (202 11 16 ALU)  
BLACK (202 11 16 B)  
WHITE (202 11 16 W)

NONADJUSTABLE

GX5.3 // 12V // EXCL.TRANSFO

 1 x QR-C51 max.50W

Class: III

Weight: 0.1 KG

Protection level: IP20

Minimum distance: 0,5m


Remarks: WHITE finish : max. 35W

Options: PLASTERKIT 101  
TRANSFO


For detailed installation instructions, please consult the manual. [202\\_11\\_16\\_HAND.pdf](#)

**DEEP RINGO S1**  
202 11 16


**Ceiling compatibility**

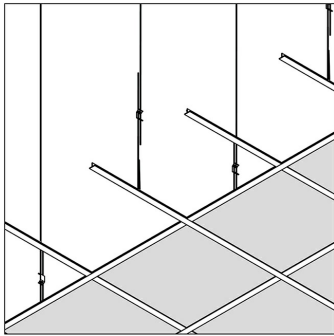


**System ceiling**



**Plasterboard**

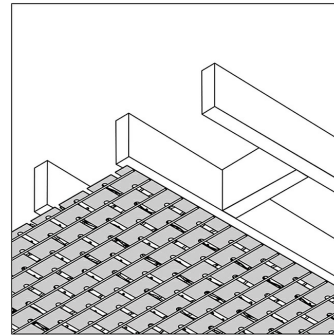


**Stucanet**

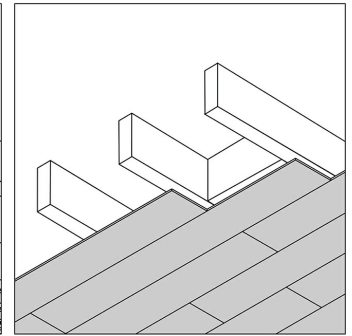

**Wood**

**Optional**


PLASTERKIT 101



**Concrete + plaster**

**Only with**


PLASTERKIT 101



**Lintel + plaster**

**Only with**


PLASTERKIT 101

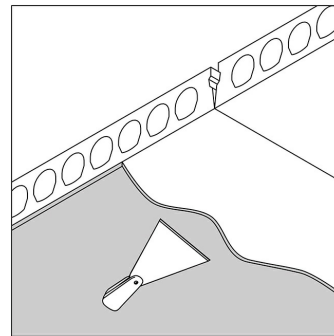

**Hollow-core slab + plaster**

**Only with**

PLASTERKIT 101

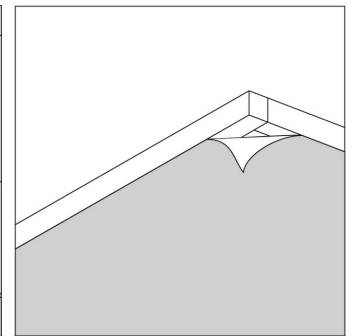

**Stretched ceiling**

**DEEP RINGO S1**  
202 11 16

**Related references**

**CONTROL GEAR, BALLAST AND TRANSFORMERS**

[Weblink / Specsheel](#)

TRANSFO 100W  
200 46 10  
220-240V / 50-60Hz

[Weblink / Specsheel](#)

TRANSFO 50W  
200 46 06  
220-240V / 50-60Hz

**Related references**

**PLASTERKITS**

[Weblink / Specs sheet](#)



PLASTERKIT 101  
202 11 19

 DELTALIGHT®

Specification Sheet

DEEP RINGO S1  
202 11 16

Related project picture of product family:

