


FLOS


 F0090030 Black

Aim

Designed by Ronan & Erwan Bouroullec, 2013

16W - 895lm - 2700K

Suspended light fitting. Body in varnished aluminium sheet, shade in photo-etched optical polycarbonate. Internal reflector in photo-etched ABS. Orientable body. Powered directly from mains. The LED can be dimmed with a «Triac for Led» dimmer approved by Flos. Flos does not respond in case of wrong electrical connection system installations. The cable has a useful length of 9 meters and thus the lamp can be suspended 3 meters from the ceiling. Multiple rose with capacity to connect up to 5 Aims also available.

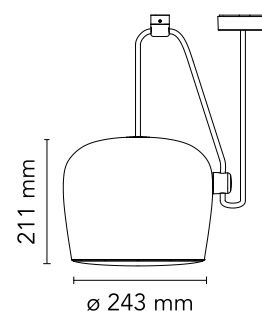

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607013281
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	16
System flux (lm)	895

Physical

Colour	Black
Length (mm)	243
Cord length (mm)	9000
Net weight (kg)	3.2
Package height (mm)	375
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

Download

Mounting instructions	↓ PDF
Compatible dimmers	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ LDT
---------------------------	-----------------------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP
Bim	↓ ZIP





Schematic light drawing



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional

Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply




OPTIONAL
F0093030
Aim Multiple Canopy



OPTIONAL
RF22227
Aim Dimmer

Spare Parts

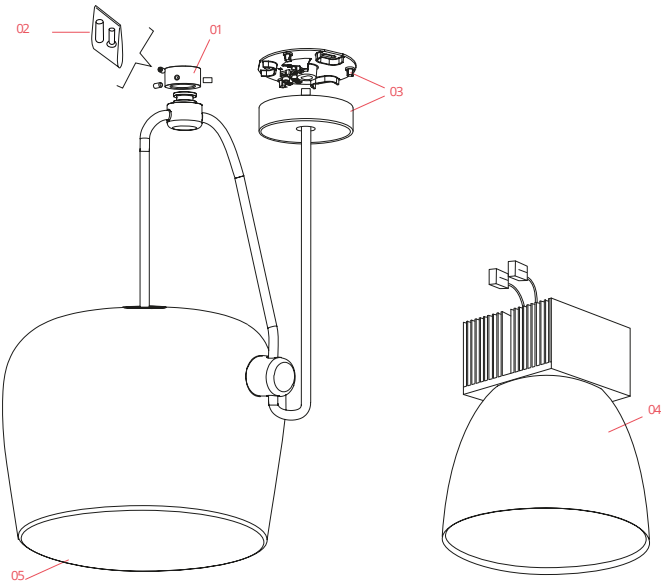

- | | | |
|-----|---|-----------|
| 01. | Black ceiling attachment assembly | RF0090130 |
| 02. | Kit of quantity 3 m4 screws | RF06750 |
| 03. | Black ceiling rose assembly | RF0090230 |
| 04. | Aim Heatsink, 2700K Led Module & Reflector Assembly | RF0090700 |
| 05. | Aim opal diffuser | RF0090600 |

DOWNLOAD



RF0090130

Black ceiling attachment assembly



RF06750

Kit of quantity 3 m4 screws



RF0090230

Black ceiling rose assembly

FLOS

RF0090700

Aim Heatsink, 2700K Led Module
& Reflector Assembly

FLOS

RF0090600

Aim opal diffuser

FLOS


F0090009 White

Aim

Designed by Ronan & Erwan Bouroullec, 2013

16W - 895lm - 2700K

Suspended light fitting. Body in varnished aluminium sheet, shade in photo-etched optical polycarbonate. Internal reflector in photo-etched ABS. Orientable body. Powered directly from mains. The LED can be dimmed with a «Triac for Led» dimmer approved by Flos. Flos does not respond in case of wrong electrical connection system installations. The cable has a useful length of 9 meters and thus the lamp can be suspended 3 meters from the ceiling. Multiple rose with capacity to connect up to 5 Aims also available.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607013267
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	16
System flux (lm)	895

Physical

Colour	White
Length (mm)	243
Cord length (mm)	9000
Net weight (kg)	3.2
Package height (mm)	375
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20
IP external	20

Download

Mounting instructions	↓ PDF
Compatible dimmers	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ LDT
-----------	-------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP
Bim	↓ ZIP






Schematic light drawing



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional

Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply




OPTIONAL
F0093009
Aim Multiple Canopy



OPTIONAL
RF22227
Aim Dimmer

Spare Parts

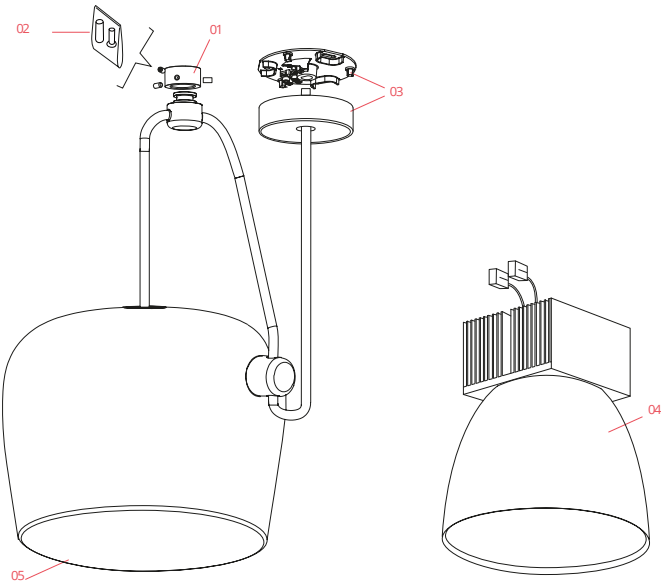

- | | | |
|-----|--|-----------|
| 01. | Ceiling attachment assembly | RF0090109 |
| 02. | Kit of quantity 3 m4 screws | RF06749 |
| 03. | White ceiling rose assembly | RF0090209 |
| 04. | Aim Heatsink, 2700K Led Module
& Reflector Assembly | RF0090700 |
| 05. | Aim opal diffuser | RF0090600 |

DOWNLOAD



RF0090109

Ceiling attachment assembly



RF06749

Kit of quantity 3 m4 screws



RF0090209

White ceiling rose assembly

FLOS

RF0090700

Aim Heatsink, 2700K Led Module
& Reflector Assembly

FLOS

RF0090600

Aim opal diffuser