


## Sawaru

■ F6640030 - Black

Designed by Nendo,Nendo

A light consisting of two independent cylinders touching each other in a perpendicular direction. One plays the role of a light source, while the other acts as a base. Its projection angle can be adjusted in three stages of 25, 40 or 60 degrees, by inserting the pin attached to the base. Various functions are made possible by doing away with excess elements and creating a simple form.

Base and body in extruded aluminium with painted or galvanized finish. Diffuser in photo-etched injection-moulded polycarbonate. Reflector in painted die-cast aluminium. Dimmer function and channel mixing via a pedal switch on the cord. Corded power supply with interchangeable plugs.




### Main specifications

<b>Mounting</b>	Floor	<b>Lamp holder</b>	LED Module
<b>Environment</b>	Indoor dry location	<b>Autoprotected Lamp</b>	No
<b>Light source type</b>	LED	<b>Number of heads</b>	1
<b>Light source replaceable</b>	Replaceable (LED only) light source by a professional LED Module	<b>Source Power (W)</b>	45
		<b>System Flux (lm)</b>	Depend on regulatio

### LED type

### Optical

<b>Lighting Type</b>	Indirect
<b>Lighting distribution</b>	Symmetric
<b>Cold Beam Lighting</b>	No
<b>Extreme Cut off</b>	No

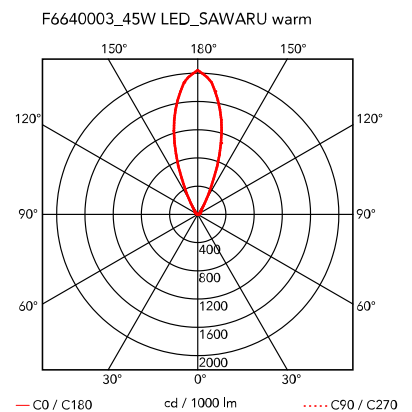

### Electrical

<b>Insulation class</b>	III	<b>Batteries Inside</b>	No
<b>Frequency (Hz)</b>	50/60	<b>Power supply replaceable</b>	Replaceable control gear by an end-user
<b>Main Voltage (Vac)</b>	100-240/48	<b>Cord length (mm)</b>	2500
<b>Driver</b>	Remote included	<b>Plug Type</b>	Type G, Type A, Type C
<b>Dimmable type</b>	Electronic 12V	<b>Charging Min Time</b>	No

### Physical

<b>Colour</b>	Black	<b>IP external</b>	20
<b>Length (mm)</b>	430		
<b>Net weight (kg)</b>	4.5		
<b>Gross weight (kg)</b>	9.92		
<b>IP</b>	20		